

Air Conditioning


Product Information

PEFY-P250VMHS-E : Indoor Unit

High Static Pressure Ceiling Concealed Ducted



With improved design flexibility as a result of increased external static pressure, the PEFY-P-VMHS-E allows authentic duct air conditioning within the strictest aesthetic confines.

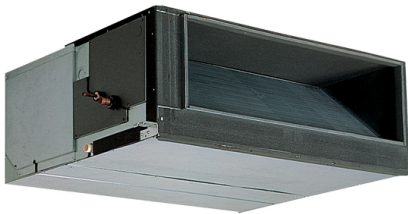

FEATURES



INDOOR

Heating Capacity (kW) (nominal)	31.5
Cooling Capacity (kW) (nominal)	28
High Performance Heating Capacity (kW) (UK)	31.5
COP Priority Heating Capacity (kW) (UK)	29.5
Cooling Capacity (kW) (UK)	26.5
Cooling Capacity (Hi-Sens Mode) (kW) (UK)	20.3
SHF (UK)	0.79
SHF (Hi-Sens Mode) (UK)	0.9
Heating Power Input (kW) (nominal)	0.82
Cooling Power Input (kW) (nominal)	0.82
Airflow (m ³ /min) - Lo-Hi	58 - 84
External Static Pressure (Pa)	50 - 150 - 250
Sound Pressure Level (dBA) - Lo-Hi	39 - 46
Weight (kg)	100
Dimensions (mm) Width	1250
Dimensions (mm) Depth	1120
Dimensions (mm) Height	470
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
Running Current (A) - Heating / Cooling	4.14 / 4.14
Fuse Rating (BS88) - HRC (A)	6
Mains Cable No. Cores	3

DIMENSIONS

PEFY-P250VMHS-E

