

# PFFY-P-VLRM-E

New Models

## Floor Standing Concealed Indoor Unit

A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

- > Concealed unit for hidden installation
- > Ideal for perimeter refurbishments
- > Cooling operation set temperature can be set down to 14°C db when used with R410A




Technical Information >>


PFFY-P-VLRM-E - INDOOR UNIT		PFFY-P20VLRM-E	PFFY-P25VLRM-E	PFFY-P32VLRM-E	PFFY-P40VLRM-E	PFFY-P50VLRM-E	PFFY-P63VLRM-E
CAPACITY (kW)	Heating (nominal)	2.5	3.2	4.0	5.0	6.3	8.0
	Cooling (nominal)	2.2	2.8	3.6	4.5	5.6	7.1
R410A / R407c	Heating (UK)	2.3	3.0	3.7	4.6	5.8	7.4
	Cooling (UK)	2.1	2.6	3.4	4.3	5.3	6.7
R407c	Cooling (UK)	2.1	2.7	3.4	4.3	5.3	6.7
R410A High Sensible	Cooling (UK)	1.5	1.9	2.4	3.0	3.8	4.8
SHF	R410A (UK)	0.90	0.81	0.74	0.72	0.74	0.73
	R407c (UK)	0.90	0.78	0.74	0.72	0.74	0.73
High Sensible	R410A (UK)	1.00	0.95	0.83	0.83	0.84	0.81
POWER INPUT (kW)	Heating (nominal)	0.04	0.04	0.06	0.065	0.085	0.10
	Cooling (nominal)	0.04	0.04	0.06	0.065	0.085	0.10
AIRFLOW (m3/min)	Lo-Hi	5.5-6.5	5.5-6.5	7-9	9-11	12-14	12-15.5
NOISE (dBA)	Lo-Hi	34-40	34-40	35-40	38-43	38-43	40-46
WEIGHT (kg)		18.5	18.5	20	21	25	27
DIMENSIONS (mm)	Width	886	886	1006	1006	1246	1246
	Depth	220	220	220	220	220	220
	Height	639	639	639	639	639	639
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single	Single	Single
RUNNING CURRENT (A)	Heating	0.19	0.19	0.29	0.32	0.40	0.46
	Cooling	0.19	0.19	0.29	0.32	0.40	0.46
FUSE RATING (BS88) – HRC (A)		6	6	6	6	6	6
MAINS CABLE No. Cores		3	3	3	3	3	3

**PFFY-P20, 25, 32, 40, 50, 63VLRM-E**


Upper View >

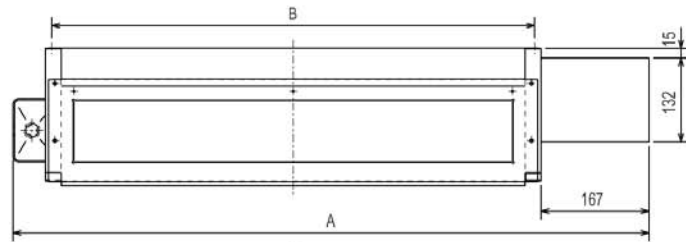

Front View >

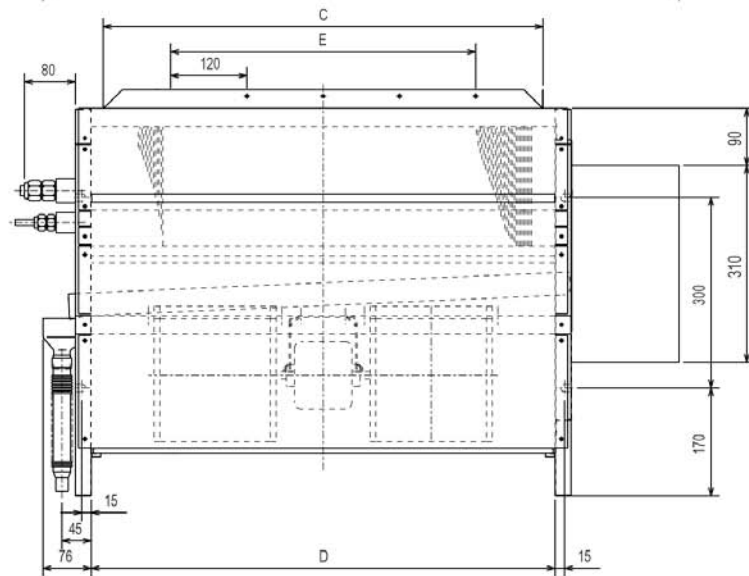

Side View >

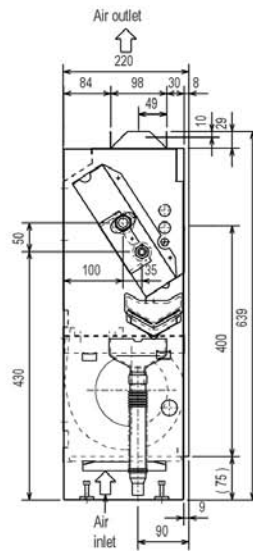

**Dimensions**

Model	A	B	C	D	E
PFFY-P20VLRM-E	886	640	572	610	360
PFFY-P25VLRM-E	886	640	572	610	360
PFFY-P32VLRM-E	1006	760	692	730	480
PFFY-P40VLRM-E	1006	760	692	730	480
PFFY-P50VLRM-E	1246	1000	932	970	720
PFFY-P63VLRM-E	1246	1000	932	970	720