



PFFY-P40VLRM-E

Indoor Unit

Floor Standing Concealed



A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

- **Concealed unit for hidden installation**
- **Ideal for perimeter refurbishments**
- **Cooling operation set temperature can be set down to 14°C db when used with R410A**



Pictures not to scale


Product Details

| PFFY-P40VLRM-E | |
|--------------------------------------|----------------|
| Capacity (kW): | |
| Heating (Nominal) | 5.0 |
| Cooling (Nominal) | 4.5 |
| R410A Heating (UK) | 4.6 |
| R407c Heating (UK) | 4.6 |
| R410A Cooling (UK) | 4.3 |
| R407c Cooling (UK) | 4.3 |
| R410A High Sensible Cooling (UK) | 3.3 |
| SHF R410A (UK) | 0.72 |
| SHF R407c (UK) | 0.72 |
| SHF High Sensible R410A (UK) | 0.79 |
| Power Input (kW) Heating (Nominal) | 0.065 |
| Power Input (kW) Cooling (Nominal) | 0.065 |
| Airflow(m ³ /min) - Lo-Hi | 9-11 |
| Noise (dBA) - Lo-Hi | 38-43 |
| Width - mm | 1006 |
| Depth - mm | 220 |
| Height - mm | 639 |
| Weight - kg | 21 |
| Electrical Supply | 220-240v, 50Hz |
| Phase | Single |
| Mains Cable No. Cores | 3 |
| Running Current (A) - Heating | 0.32 |
| Running Current (A) - Cooling | 0.32 |
| Fuse Rating (BS88) - HRC (A) | 6 |


Dimensions

PFFY-P40VLRM-E


Upper View >

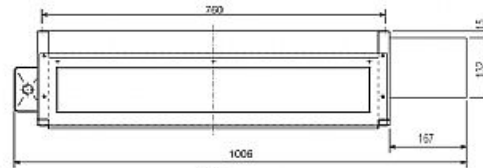

Front View >

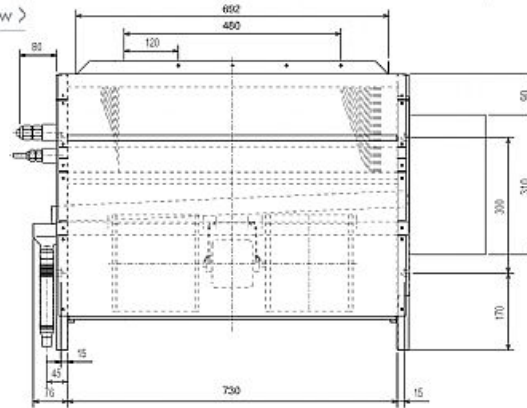

Side View >

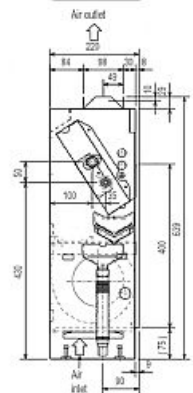

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

