



PKFY-P40VGM-E

Indoor Unit

Wall Mounted

An elegant design combined with compact dimensions and quiet operation make the PKFY-P an ideal unit choice. Noise levels are significantly reduced thanks to a unique airflow passage design that not only makes the unit one of the quietest in the industry, but also suppresses condensation and prevents mixing with secondary air.

- **Compact design**
- **Front grille opening for easy cleaning**
- **Front power supply for easy wiring after installation**
- **5-way piping provides more flexibility in selection of installation sites**



Pictures not to scale




Product Details

PKFY-P40VGM-E	
Capacity (kW):	
Heating (Nominal)	5.0
Cooling (Nominal)	4.5
R410A Heating (UK)	4.6
R407c Heating (UK)	4.6
R410A Cooling (UK)	4.3
R407c Cooling (UK)	4.3
R410A High Sensible Cooling (UK)	3.3
SHF R410A (UK)	0.74
SHF R407c (UK)	0.74
SHF High Sensible R410A (UK)	0.82
Power Input (kW) Heating (Nominal)	0.07
Power Input (kW) Cooling (Nominal)	0.07
Airflow(m ³ /min) - Lo-Mi1-Mi2-Hi	8-9.5-10.5-11.5
Noise (dBA) - Lo-Mi1-Mi2-Hi	33-36-38-41
Width - mm	990
Depth - mm	235
Height - mm	340
Weight - kg	16
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Heating	0.32
Running Current (A) - Cooling	0.32
Fuse Rating (BS88) - HRC (A)	6

Dimensions

PKFY-P40VGM-E

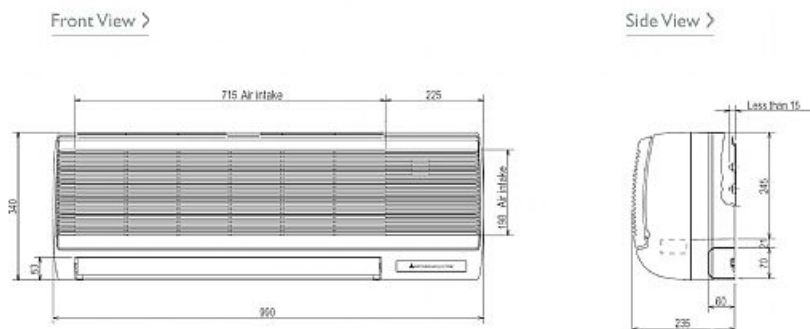

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

