

PLFY-P-VCM-E

2x2 4-Way Blow Ceiling Cassette Indoor Unit

The compact size of this unit is ideal for 2 by 2 ceilings and with a depth of 208mm, this lightweight unit makes installation a breeze. This unit also comes complete with a long life filter that will last for approximately 2,500 hours.

- > Compact size for handy installation and easy maintenance
- > Only 208mm high
- > Fresh air duct facility




[Technical Information >>](#)

PLFY-P-VCM-E - INDOOR UNIT		PLFY-P20VCM-E	PLFY-P25VCM-E	PLFY-P32VCM-E	PLFY-P40VCM-E
CAPACITY (kW)	Heating (nominal)	2.5	3.2	4.0	5.0
	Cooling (nominal)	2.2	2.8	3.6	4.5
R410A / R407c	Heating (UK)	2.3	3.0	3.7	4.6
R410A	Cooling (UK)	2.1	2.6	3.4	4.3
R407c	Cooling (UK)	2.1	2.7	3.4	4.3
R410A High Sensible	Cooling (UK)	1.6	2.0	2.6	3.3
SHF	R410A (UK)	0.86	0.81	0.76	0.70
	R407c (UK)	0.86	0.78	0.76	0.70
High Sensible	R410A (UK)	1.00	0.90	0.85	0.76
POWER INPUT (kW)	Heating (nominal)	0.05	0.05	0.06	0.06
	Cooling (nominal)	0.05	0.05	0.06	0.06
AIRFLOW (m3/min)	Lo-Mi-Hi	8-9-10	8-9-10	8-9-11	8-9-11
NOISE (dBA)	Lo-Mi-Hi	28-31-35	28-31-37	29-33-38	30-34-39
WEIGHT (kg)	(Grille)	15.5(3)	15.5(3)	17(3)	17(3)
DIMENSIONS (mm)	Width (Grille)	570(650)	570(650)	570(650)	570(650)
	Depth (Grille)	570(650)	570(650)	570(650)	570(650)
	Height (Grille)	208(20)	208(20)	208(20)	208(20)
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single
RUNNING CURRENT (A)	Heating	0.23	0.23	0.28	0.28
	Cooling	0.23	0.23	0.28	0.28
FUSE RATING (BS88) – HRC (A)		6	6	6	6
MAINS CABLE No. Cores		3	3	3	3
GRILLE MODEL REFERENCE		SLP-2AA	SLP-2AA	SLP-2AA	SLP-2AA

PLFY-P20, 25, 32, 40VCM-E

Lower View >

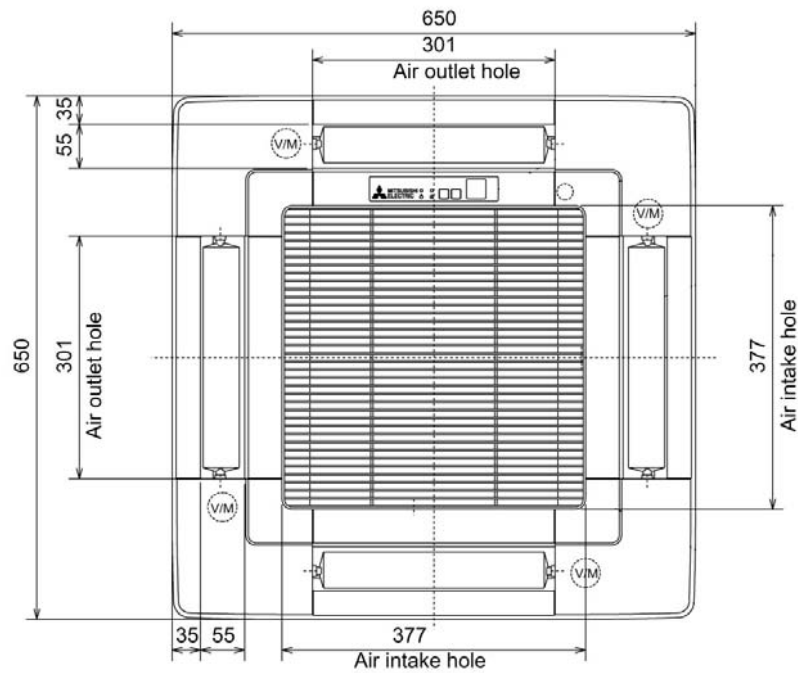

Side View >

