




PQHY-P750YSHM-A

WY Series 30hp Water Cooled Condensing Unit

R410A Heat Pump



Pictures not to scale

Product Details

PQHY-P750YSHM-A	
Capacity (kW):	
Heating (Nominal)	95.0
Cooling (Nominal)	85.0
Power Input (kW) Heating (Nominal)	18.27
Power Input (kW) Cooling (Nominal)	17.19
Max No. of Connectable Indoor Units	50
Noise (dBA)	54
Width - mm	880 + 880 + 880
Depth - mm	550
Height - mm	1160
Weight - kg	195 + 195 + 195
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	28.2
Running Current (A) - Cooling	26.5
Fuse Rating (BS88) - HRC (A)	20

Piping Restrictions

Total Piping Length (m)	500
Furthest Piping Length (m)	165
Furthest Piping Length after 1st Branch (m)	40
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

Dimensions

PQHY-P750YSHM-A


Upper View >



Left Side View >



Front View >

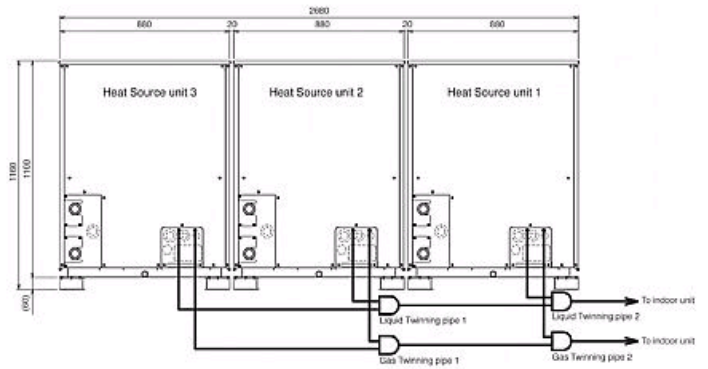

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

