

OUTDOOR UNITS

1. SPECIFICATIONS	2 - 156
2. EXTERNAL DIMENSIONS	2 - 177
3. CENTER OF GRAVITY	2 - 192
4. ELECTRICAL WIRING DIAGRAMS	2 - 193
5. SOUND LEVELS	2 - 196
6. VIBRATION LEVEL	2 - 203
7. OPERATION TEMPERATURE RANGE	2 - 204
8. CAPACITY TABLES	2 - 205
8-1. Selection of Cooling/Heating Units	2 - 206
8-2. Correction by temperature	2 - 212
8-3. Correction by total indoor	2 - 236
8-4. Correction by refrigerant piping length	2 - 248
8-5. Correction at frost and defrost	2 - 252
9. OPTIONAL PARTS	2 - 253
9-1. JOINT	2 - 253
9-2. HEADER	2 - 254
9-3. OUTDOOR TWINNING KIT	2 - 255
9-4. RELAY BOX	2 - 256
9-5. BASE HEATER	2 - 257

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP200YLM-A1 (-BS)	PUHY-EP250YLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	22.4	28.0	
		kcal/h	20,000	25,000	
		BTU/h	76,400	95,500	
	*1	Power input	kW	5.19	6.89
		Current input	A	8.7-8.3-8.0	11.6-11.0-10.6
EER		kW/kW	4.31	4.06	
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	25.0	31.5	
		kcal/h	21,500	27,100	
		BTU/h	85,300	107,500	
	*2	Power input	kW	5.73	7.68
		Current input	A	9.6-9.1-8.8	12.9-12.3-11.8
		COP	kW/kW	4.36	4.10
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		50~130% of outdoor unit capacity	
	Model/Quantity	P15~P250/1~17		P15~P250/1~21	
Sound pressure level (measured in anechoic room)	dB <A>		57	60	
Sound power level (measured in anechoic room)	dB <A>		79.5	80	
Refrigerant piping diameter	Liquid pipe	mm (in.)	9.52 (3/8) Brazed	9.52 (3/8) Brazed (12.7 (1/2) Brazed, farthest length >= 90 m)	
	Gas pipe	mm (in.)	22.2 (7/8) Brazed	22.2 (7/8) Brazed	
FAN	Type x Quantity		Propeller fan x 1		
	Air flow rate	m ³ /min	175	175	
		L/s	2,917	2,917	
		cfm	6,179	6,179	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 1	0.92 x 1	
*3 External static press.	0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor		
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		
	Starting method		Inverter		
	Motor output	kW	5.6	6.9	
	Case heater	kW	-	-	
	Lubricant		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		
External dimension H x W x D			1,710 (1,650 without legs) x 920 x 740 67-3/8 (65 without legs) x 36-1/4 x 29-3/16		
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		
	Compressor		-		
	Fan motor		-		
Refrigerant	Type x original charge		R410A x 7.5 kg (17 lbs)		
	Control		LEV and HIC circuit		
Net weight		kg (lbs)	200 (441)	200 (441)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		
Drawing	External	WKJ94T994		WKJ94T994	
	Wiring	WKE94G039		WKE94G039	
Standard attachment	Document	Installation Manual		Installation Manual	
	Accessory	Refrigerant conn. pipe		Refrigerant conn. pipe	
Optional parts			Joint: CMY-Y102SS/LS-G2 Header: CMY-Y104/108/1010-G		
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Y (HIGH COP)

Model			PUHY-EP300YLM-A1 (-BS)	PUHY-EP350YLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	33.5	40.0	
		kcal/h	30,000	35,000	
		BTU/h	114,300	136,500	
	Power input	kW	8.56	11.69	
	Current input	A	14.4-13.7-13.2	19.7-18.7-18.0	
EER			kW/kW	3.91	3.42
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)		
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)		
Heating capacity (Nominal)	*2	kW	37.5	45.0	
		kcal/h	32,300	38,700	
		BTU/h	128,000	153,500	
	Power input	kW	9.16	12.53	
	Current input	A	15.4-14.6-14.1	21.1-20.0-19.3	
COP			kW/kW	4.09	3.59
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)		
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		50~130% of outdoor unit capacity	
	Model/Quantity	P15~P250/1~26		P15~P250/1~30	
Sound pressure level (measured in anechoic room)		dB <A>	61	61	
Sound power level (measured in anechoic room)		dB <A>	82	82.5	
Refrigerant piping diameter	Liquid pipe	mm (in.)	9.52 (3/8) Brazed (12.7 (1/2) Brazed, farthest length >= 40 m)	12.7 (1/2) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	
FAN	Type x Quantity		Propeller fan x 1		
	Air flow rate	m ³ /min	200	200	
		L/s	3,333	3,333	
		cfm	7,062	7,062	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		
Motor output	kW	0.92 x 1	0.92 x 1		
*3 External static press.		0 Pa (0 mmH ₂ O)			
Compressor	Type		Inverter scroll hermetic compressor		
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		
	Starting method		Inverter		
	Motor output	kW	8.1	10.5	
	Case heater	kW	-	-	
	Lubricant		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		
External dimension H x W x D			mm 1,710 (1,650 without legs) x 1,220 x 740 in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16		
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		
	Compressor		-		
	Fan motor		-		
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		
	Control		LEV and HIC circuit		
Net weight		kg (lbs)	243 (536)	237 (523)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		
Drawing	External	WKJ94T995		WKJ94T995	
	Wiring	WKE94G039		WKE94G039	
Standard attachment	Document	Installation Manual		Installation Manual	
	Accessory	Refrigerant conn. pipe		Refrigerant conn. pipe	
Optional parts			Joint: CMY-Y102SS/LS-G2 Header: CMY-Y104/108/1010-G		
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP400YLM-A1 (-BS)	PUHY-EP450YLM-A1 (-BS)
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	45.0	50.0
		kcal/h	40,000	45,000
		BTU/h	153,500	170,600
	Power input	kW	12.26	14.79
		A	20.6-19.6-18.9	24.9-23.7-22.8
EER	kW/kW	3.67	3.38	
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	15.0~24.0°C (59~75°F)
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	-5.0~52.0°C (23~126°F)
Heating capacity (Nominal)	*2	kW	50.0	56.0
		kcal/h	45,000	50,000
		BTU/h	170,600	191,100
	Power input	kW	13.15	16.09
		A	22.1-21.0-20.3	27.1-25.8-24.8
	COP	kW/kW	3.80	3.48
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	15.0~27.0°C (59~81°F)
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	-20.0~15.5°C (-4~60°F)
Indoor unit connectable	Total capacity		50~130% of outdoor unit capacity	50~130% of outdoor unit capacity
	Model/Quantity		P15~P250/1~34	P15~P250/1~39
Sound pressure level (measured in anechoic room)		dB <A>	62.5	63
Sound power level (measured in anechoic room)		dB <A>	82.5	83
Refrigerant piping diameter	Liquid pipe	mm (in.)	12.7 (1/2) Brazed	15.88 (5/8) Brazed
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed
FAN	Type x Quantity		Propeller fan x 2	Propeller fan x 2
	Air flow rate	m ³ /min	320	370
		L/s	5,333	6,167
		cfm	11,299	13,065
	Control, Driving mechanism		Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor
	Motor output	kW	0.92 x 2	0.92 x 2
*3 External static press.		0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)	
Compressor	Type		Inverter scroll hermetic compressor	Inverter scroll hermetic compressor
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	AC&R Works, MITSUBISHI ELECTRIC CORPORATION
	Starting method		Inverter	Inverter
	Motor output	kW	10.9	12.4
	Case heater	kW	-	-
	Lubricant		MEL32	MEL32
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>
External dimension H x W x D			mm 1,710 (1,650 without legs) x 1,750 x 740 in. 67-3/8 (65 without legs) x 68-15/16 x 29-3/16	mm 1,710 (1,650 without legs) x 1,750 x 740 in. 67-3/8 (65 without legs) x 68-15/16 x 29-3/16
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection	Over-heat protection, Over-current protection
	Compressor		-	-
	Fan motor		-	-
Refrigerant	Type x original charge		R410A x 11.8 kg (27 lbs)	R410A x 11.8 kg (27 lbs)
	Control		LEV and HIC circuit	LEV and HIC circuit
Net weight			kg (lbs) 306 (675)	kg (lbs) 306 (675)
Heat exchanger			Salt-resistant cross fin & aluminium tube	Salt-resistant cross fin & aluminium tube
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure	Copper pipe, tube-in-tube structure
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)	Auto-defrost mode (Reversed refrigerant cycle, Hot gas)
Drawing	External		WKJ94T996	WKJ94T996
	Wiring		WKE94G040	WKE94G040
Standard attachment	Document		Installation Manual	Installation Manual
	Accessory		Refrigerant conn. pipe	Refrigerant conn. pipe
Optional parts			Joint: CMY-Y102SS/LS-G2, CMY-Y202S-G2 Header: CMY-Y104/108/1010-G	Joint: CMY-Y102SS/LS-G2, CMY-Y202S-G2 Header: CMY-Y104/108/1010-G
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.	

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412 cfm =m ³ /min x 35.31 lbs =kg/0.4536
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

γ (HIGH COP)

Model		PUHY-EP500YLM-A1 (-BS)	
Power source		3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1 kW	56.0	
	kcal/h	50,000	
	*1 BTU/h	191,100	
	Power input kW	18.72	
	Current input A	31.6-30.0-28.9	
EER		kWh/kWh 2.99	
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)
Heating capacity (Nominal)	*2 kW	63.0	
	kcal/h	54,200	
	*2 BTU/h	215,000	
	Power input kW	19.68	
	Current input A	33.2-31.5-30.4	
COP		kWh/kWh 3.20	
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity	
	Model/Quantity	P15~P250/1~43	
Sound pressure level (measured in anechoic room)		dB <A>	63.5
Sound power level (measured in anechoic room)		dB <A>	83.5
Refrigerant piping diameter	Liquid pipe	mm (in.)	15.88 (5/8) Brazed
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed
FAN	Type x Quantity		Propeller fan x 2
	Air flow rate	m ³ /min	370
		L/s	6,167
		cfm	13,065
	Control, Driving mechanism		Inverter-control, Direct-driven by motor
	Motor output	kW	0.92 x 2
*3 External static press.	0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION
	Starting method		Inverter
	Motor output	kW	13.4
	Case heater	kW	0.045
	Lubricant		MEL32
External finish		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D		mm	1,710 (1,650 without legs) x 1,750 x 740
		in.	67-3/8 (65 without legs) x 68-15/16 x 29-3/16
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection
	Compressor		-
	Fan motor		-
Refrigerant	Type x original charge		R410A x 11.8 kg (27 lbs)
	Control		LEV and HIC circuit
Net weight	kg (lbs)	318 (702)	
Heat exchanger		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)		Copper pipe, tube-in-tube structure	
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)	
Drawing	External		WKJ94T996
	Wiring		WKE94G043
Standard attachment	Document		Installation Manual
	Accessory		Refrigerant conn. pipe
Optional parts		Joint: CMY-Y102SS/LS-G2, CMY-Y202S-G2 Header: CMY-Y104/108/1010-G	
Remarks		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.	

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP550YSLM-A1 (-BS)		
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	63.0		
		kcal/h	54,200		
		BTU/h	215,000		
	Power input	kW	16.62		
		Current input	A	28.0-26.6-25.6	
EER		kW/kW	3.79		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)		
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)		
Heating capacity (Nominal)	*2	kW	69.0		
		kcal/h	59,300		
		BTU/h	235,400		
	Power input	kW	17.73		
		Current input	A	29.9-28.4-27.4	
COP		kW/kW	3.89		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)		
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		
Indoor unit connectable	Total capacity		50~130% of outdoor unit capacity		
	Model/Quantity		P15~P250/2~47		
Sound pressure level (measured in anechoic room)		dB <A>	63.5		
Sound power level (measured in anechoic room)		dB <A>	84.5		
Refrigerant piping diameter	Liquid pipe	mm (in.)	15.88 (5/8) Brazed		
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		

Set Model			PUHY-EP250YLM-A1 (-BS)			PUHY-EP300YLM-A1 (-BS)		
Model			PUHY-EP250YLM-A1 (-BS)			PUHY-EP300YLM-A1 (-BS)		
FAN	Type x Quantity		Propeller fan x 1			Propeller fan x 1		
	Air flow rate	m ³ /min	175			200		
		L/s	2,917			3,333		
		cfm	6,179			7,062		
	Control, Driving mechanism		Inverter-control, Direct-driven by motor			Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 1			0.92 x 1		
*3	External static press.		0 Pa (0 mmH ₂ O)			0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor			Inverter scroll hermetic compressor		
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION			AC&R Works, MITSUBISHI ELECTRIC CORPORATION		
	Starting method		Inverter			Inverter		
	Motor output	kW	6.9			8.1		
	Case heater	kW	-			-		
	Lubricant		MEL32			MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		
External dimension H x W x D			mm 1,710 (1,650 without legs) x 920 x 740 in. 67-3/8 (65 without legs) x 36-1/4 x 29-3/16			mm 1,710 (1,650 without legs) x 1,220 x 740 in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16		
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)			High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection			Over-heat protection, Over-current protection		
	Compressor		-			-		
	Fan motor		-			-		
Refrigerant	Type x original charge		R410A x 7.5 kg (17 lbs)			R410A x 10.3 kg (23 lbs)		
	Control		LEV and HIC circuit					
Net weight		kg (lbs)	200 (441)			243 (536)		
Heat exchanger			Salt-resistant cross fin & aluminium tube			Salt-resistant cross fin & aluminium tube		
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure			Copper pipe, tube-in-tube structure		
Pipe between unit and distributor	Liquid pipe	mm (in.)	9.52 (3/8) Brazed			12.7 (1/2) Brazed		
	Gas pipe	mm (in.)	22.2 (7/8) Brazed			28.58 (1-1/8) Brazed		
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)					
Drawing	External		WKJ94T997					
	Wiring		WKE94G039			WKE94G039		
Standard attachment	Document		Installation Manual					
	Accessory		Refrigerant conn. pipe					
Optional parts			Outdoor Twinning kit: CMY-Y100VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202S/302S-G2 Header: CMY-Y104/108/1010-G					
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.					

Notes:		Unit converter	
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)		BTU/h	=kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)		cfm	=m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).		lbs	=kg/0.4536
		*Above specification data is subject to rounding variation.	

1. SPECIFICATIONS

Y (HIGH COP)

Model			PUHY-EP600YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	69.0	
		kcal/h	59,300	
		BTU/h	235,400	
	Power input	kW	18.59	
		Current input	A	31.3-29.8-28.7
EER		kW/kW	3.71	
Temp. range of cooling	Indoor	W.B.	15.0-24.0°C (59-75°F)	
	Outdoor	D.B.	-5.0-52.0°C (23-126°F)	
Heating capacity (Nominal)	*2	kW	76.5	
		kcal/h	65,800	
		BTU/h	281,000	
	Power input	kW	19.66	
		Current input	A	33.1-31.5-30.3
COP		kW/kW	3.89	
Temp. range of heating	Indoor	D.B.	15.0-27.0°C (59-81°F)	
	Outdoor	W.B.	-20.0-15.5°C (-4-60°F)	
Indoor unit connectable	Total capacity	50-130% of outdoor unit capacity		
	Model/Quantity	P15-P250/2-50		
Sound pressure level (measured in anechoic room)	dB <A>	64		
Sound power level (measured in anechoic room)	dB <A>	85		
Refrigerant piping diameter	Liquid pipe	mm (in.)	15.88 (5/8) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed	

Set Model			PUHY-EP300YLM-A1 (-BS)		PUHY-EP300YLM-A1 (-BS)	
Model			Propeller fan x 1		Propeller fan x 1	
FAN	Type x Quantity		200		200	
	Air flow rate	m ³ /min	3,333		3,333	
		L/s	7,062		7,062	
		cfm				
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
*3	Motor output	kW	0.92 x 1		0.92 x 1	
External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter	
	Motor output	kW	8.1		8.1	
	Case heater	kW	-		-	
Lubricant		MEL32		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			1,710 (1,650 without legs) x 1,220 x 740 67-3/8 (65 without legs) x 48-1/16 x 29-3/16		1,710 (1,650 without legs) x 1,220 x 740 67-3/8 (65 without legs) x 48-1/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-	
	Fan motor		-		-	
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		R410A x 10.3 kg (23 lbs)	
	Control		LEV and HIC circuit			
Net weight			243 (536)		243 (536)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		12.7 (1/2) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)			
Drawing	External		WKJ94T998			
	Wiring		WKE94G039		WKE94G039	
Standard attachment	Document		Installation Manual			
	Accessory		Refrigerant conn. pipe			
Optional parts			Outdoor Twinning kit: CMY-Y100VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202S/302S-G2 Header: CMY-Y104/108/1010-G			
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.			

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412 cfm =m ³ /min x 35.31 lbs =kg/0.4536
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP650YSLM-A1 (-BS)		
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	73.0		
		kcal/h	62,800		
		BTU/h	249,100		
	Power input	kW	18.15		
		Current input	A	30.6-29.1-28.0	
EER		kW/kW	4.02		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)		
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)		
Heating capacity (Nominal)	*2	kW	81.5		
		kcal/h	70,100		
		BTU/h	278,100		
	Power input	kW	20.07		
		Current input	A	33.8-32.1-31.0	
COP		kW/kW	4.06		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)		
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		
Indoor unit connectable	Total capacity		50~130% of outdoor unit capacity		
	Model/Quantity		P15~P250/2~50		
Sound pressure level (measured in anechoic room)		dB <A>	63		
Sound power level (measured in anechoic room)		dB <A>	84.5		
Refrigerant piping diameter	Liquid pipe	mm (in.)	15.88 (5/8) Brazed		
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		

Set Model							
Model		PUHY-EP200YLM-A1 (-BS)		PUHY-EP200YLM-A1 (-BS)			
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1		
	Air flow rate	m ³ /min	175		175		
		L/s	2,917		2,917		
		cfm	6,179		6,179		
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		
	Motor output		kW		0.92 x 1		
*3 External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)			
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		
	Starting method		Inverter		Inverter		
	Motor output		kW		5.6		
	Case heater		kW		-		
	Lubricant		MEL32		MEL32		
External finish		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>			
External dimension H x W x D		mm	1,710 (1,650 without legs) x 920 x 740		1,710 (1,650 without legs) x 920 x 740		
		in.	67-3/8 (65 without legs) x 36-1/4 x 29-3/16		67-3/8 (65 without legs) x 36-1/4 x 29-3/16		
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		
	Compressor		-		-		
	Fan motor		-		-		
Refrigerant	Type x original charge		R410A x 7.5 kg (17 lbs)		R410A x 7.5 kg (17 lbs)		
	Control		LEV and HIC circuit				
Net weight		kg (lbs)	200 (441)		200 (441)		
Heat exchanger		Salt-resistant cross fin & aluminium tube				Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)		Copper pipe, tube-in-tube structure				Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	9.52 (3/8) Brazed		9.52 (3/8) Brazed		
	Gas pipe	mm (in.)	22.2 (7/8) Brazed		22.2 (7/8) Brazed		
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)					
Drawing	External		WKJ94T999				
	Wiring		WKE94G039		WKE94G039		
Standard attachment	Document		Installation Manual				
	Accessory		Refrigerant conn. pipe				
Optional parts		Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G					
Remarks		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.					

Notes:		Unit converter	
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C.D.B./19°C.W.B. (81°F.D.B./66°F.W.B.), Outdoor: 35°C.D.B./24°C.W.B. (95°F.D.B./75°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)		BTU/h	=kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C.D.B. (68°F.D.B.), Outdoor: 7°C.D.B./6°C.W.B. (45°F.D.B./43°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)		cfm	=m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).		lbs	=kg/0.4536
		*Above specification data is subject to rounding variation.	

1. SPECIFICATIONS

DATA G11

Y (HIGH COP)

Model		PUHY-EP700YSLM-A1 (-BS)	
Power source		3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1 kW	80.0	
	kcal/h	68,800	
	*1 BTU/h	273,000	
	Power input kW	20.15	
	Current input A	34.0-32.3-31.1	
Temp. range of cooling	EER	3.97	
	Indoor	W.B.	15.0~24.0°C (59~75°F)
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)
Heating capacity (Nominal)	*2 kW	88.0	
	kcal/h	75,700	
	*2 BTU/h	300,300	
	Power input kW	21.67	
	Current input A	36.5-34.7-33.4	
Temp. range of heating	COP	4.06	
	Indoor	D.B.	15.0~27.0°C (59~81°F)
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity	
	Model/Quantity	P15~P250/2~50	
Sound pressure level (measured in anechoic room)	dB <A>	63.5	
Sound power level (measured in anechoic room)	dB <A>	85.5	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed
	Gas pipe	mm (in.)	34.93 (1-3/8) Brazed

Set Model		PUHY-EP200YLM-A1 (-BS)		PUHY-EP200YLM-A1 (-BS)		PUHY-EP300YLM-A1 (-BS)		
FAN	Type x Quantity	Propeller fan x 1		Propeller fan x 1		Propeller fan x 1		
	Air flow rate	m ³ /min	175		175		200	
		L/s	2,917		2,917		3,333	
		cfm	6,179		6,179		7,062	
	Control, Driving mechanism	Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 1		0.92 x 1		0.92 x 1	
*3 External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		
Compressor	Type	Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		
	Manufacture	AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		
	Starting method	Inverter		Inverter		Inverter		
	Motor output	kW	5.6		5.6		8.1	
	Case heater	kW	-		-		-	
	Lubricant		MEL32		MEL32		MEL32	
External finish		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		
External dimension H x W x D	mm	1,710 (1,650 without legs) x 920 x 740		1,710 (1,650 without legs) x 920 x 740		1,710 (1,650 without legs) x 1,220 x 740		
	in.	67-3/8 (65 without legs) x 36-1/4 x 29-3/16		67-3/8 (65 without legs) x 36-1/4 x 29-3/16		67-3/8 (65 without legs) x 48-1/16 x 29-3/16		
Protection devices	High pressure protection	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		
	Inverter circuit (COMP./FAN)	Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		
	Compressor	-		-		-		
	Fan motor	-		-		-		
Refrigerant	Type x original charge	R410A x 7.5 kg (17 lbs)		R410A x 7.5 kg (17 lbs)		R410A x 10.3 kg (23 lbs)		
	Control			LEV and HIC circuit				
Net weight	kg (lbs)	200 (441)		200 (441)		243 (536)		
Heat exchanger		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		
HIC circuit (HIC: Heat Inter-Changer)		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		
Pipe between unit and distributor	Liquid pipe	mm (in.)	9.52 (3/8) Brazed		9.52 (3/8) Brazed		12.7 (1/2) Brazed	
	Gas pipe	mm (in.)	22.2 (7/8) Brazed		22.2 (7/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)						
Drawing	External	WKS94C149						
	Wiring	WKE94G039		WKE94G039		WKE94G039		
Standard attachment	Document	Installation Manual						
	Accessory	Refrigerant conn. pipe						
Optional parts		Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G						
Remarks		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.						

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP750YSLM-A1 (-BS)		
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	85.0		
		kcal/h	73,100		
		BTU/h	290,000		
	Power input	kW	21.85		
		A	36.8-35.0-33.7		
EER	kW/kW	3.89			
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)		
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)		
Heating capacity (Nominal)	*2	kW	95.0		
		kcal/h	81,700		
		BTU/h	324,100		
	Power input	kW	23.92		
		A	40.3-38.3-36.9		
COP	kW/kW	3.97			
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)		
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity			
	Model/Quantity	P15~P250/2~50			
Sound pressure level (measured in anechoic room)		dB <A>	64.5		
Sound power level (measured in anechoic room)		dB <A>	85.5		
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed		
	Gas pipe	mm (in.)	34.93 (1-3/8) Brazed		

Set Model

Model			PUHY-EP200YLM-A1 (-BS)	PUHY-EP250YLM-A1 (-BS)	PUHY-EP300YLM-A1 (-BS)
FAN	Type x Quantity		Propeller fan x 1		
	Air flow rate	m ³ /min	175	175	200
		L/s	2,917	2,917	3,333
		cfm	6,179	6,179	7,062
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		
	*3 Motor output	kW	0.92 x 1		
External static press.		0 Pa (0 mmH ₂ O)			
Compressor	Type		Inverter scroll hermetic compressor		
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		
	Starting method		Inverter		
	Motor output	kW	5.6		
	Case heater	kW	-		
Lubricant		MEL32			
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>
External dimension H x W x D			mm		in.
			1,710 (1,650 without legs) x 920 x 740		1,710 (1,650 without legs) x 920 x 740
			67-3/8 (65 without legs) x 36-1/4 x 29-3/16		67-3/8 (65 without legs) x 36-1/4 x 29-3/16
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection
	Compressor		-		-
	Fan motor		-		-
Refrigerant	Type x original charge		R410A x 7.5 kg (17 lbs)		R410A x 7.5 kg (17 lbs)
	Control		LEV and HIC circuit		
Net weight			kg (lbs)		
			200 (441)		200 (441)
			243 (536)		
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure
Pipe between unit and distributor	Liquid pipe	mm (in.)	9.52 (3/8) Brazed		9.52 (3/8) Brazed
	Gas pipe	mm (in.)	22.2 (7/8) Brazed		22.2 (7/8) Brazed
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		
Drawing	External		WKS94C149		
	Wiring		WKE94G039		WKE94G039
Standard attachment	Document		Installation Manual		
	Accessory		Refrigerant conn. pipe		
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G		
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		

Notes:

- Nominal cooling conditions (subject to JIS B8615-1)
Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.)
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)
- Nominal heating conditions (subject to JIS B8615-1)
Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.)
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)
- External static pressure option is available (30Pa, 60Pa/3.1mmH₂O, 6.1mmH₂O).

Unit converter

BTU/h =kW x 3,412
cfm =m³/min x 35.31
lbs =kg/0.4536

*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Y (HIGH COP)

Model			PUHY-EP800YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	90.0	
		kcal/h	77,400	
		BTU/h	307,100	
	Power input	kW	23.43	
		A	39.5-37.5-36.2	
EER		3.84		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	100.0	
		kcal/h	86,000	
		BTU/h	341,200	
	Power input	kW	25.18	
		A	42.5-40.3-38.9	
COP		3.97		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15-P250/2-50		
Sound pressure level (measured in anechoic room)		dB <A>	65	
Sound power level (measured in anechoic room)		dB <A>	86.5	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	34.93 (1-3/8) Brazed	

Set Model

Model			PUHY-EP200YLM-A1 (-BS)	PUHY-EP300YLM-A1 (-BS)	PUHY-EP300YLM-A1 (-BS)
FAN	Type x Quantity		Propeller fan x 1	Propeller fan x 1	Propeller fan x 1
	Air flow rate	m ³ /min	175	200	200
		L/s	2,917	3,333	3,333
		cfm	6,179	7,062	7,062
	Control, Driving mechanism		Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor
	Motor output	kW	0.92 x 1	0.92 x 1	0.92 x 1
*3	External static press.		0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)
Compressor	Type		Inverter scroll hermetic compressor	Inverter scroll hermetic compressor	Inverter scroll hermetic compressor
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	AC&R Works, MITSUBISHI ELECTRIC CORPORATION	AC&R Works, MITSUBISHI ELECTRIC CORPORATION
	Starting method		Inverter	Inverter	Inverter
	Motor output	kW	5.6	8.1	8.1
	Case heater	kW	-	-	-
Lubricant		MEL32			
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>
External dimension H x W x D			mm 1,710 (1,650 without legs) x 920 x 740	mm 1,710 (1,650 without legs) x 1,220 x 740	mm 1,710 (1,650 without legs) x 1,220 x 740
			in. 67-3/8 (65 without legs) x 36-1/4 x 29-3/16	in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16	in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection	Over-heat protection, Over-current protection	Over-heat protection, Over-current protection
	Compressor		-	-	-
	Fan motor		-	-	-
Refrigerant	Type x original charge		R410A x 7.5 kg (17 lbs)	R410A x 10.3 kg (23 lbs)	R410A x 10.3 kg (23 lbs)
	Control		LEV and HIC circuit		
Net weight			kg (lbs) 200 (441)	kg (lbs) 243 (536)	kg (lbs) 243 (536)
Heat exchanger			Salt-resistant cross fin & aluminium tube		
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		
Pipe between unit and distributor	Liquid pipe	mm (in.)	9.52 (3/8) Brazed	12.7 (1/2) Brazed	12.7 (1/2) Brazed
	Gas pipe	mm (in.)	22.2 (7/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		
Drawing	External		WKS94C150		
	Wiring		WKE94G039	WKE94G039	WKE94G039
Standard attachment	Document		Installation Manual		
	Accessory		Refrigerant conn. pipe		
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G		
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C.D.B./19°C.W.B. (81°F.D.B./66°F.W.B.), Outdoor: 35°C.D.B./24°C.W.B. (95°F.D.B./75°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C.D.B. (68°F.D.B.), Outdoor: 7°C.D.B./6°C.W.B. (45°F.D.B./43°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP850YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	96.0	
		kcal/h	82,600	
		BTU/h	327,600	
	Power input	kW	25.53	
		A	43.0-40.9-39.4	
EER	kW/kW	3.76		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	108.0	
		kcal/h	92,900	
		BTU/h	368,500	
	Power input	kW	27.76	
		A	46.8-44.5-42.9	
COP	kW/kW	3.89		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15~P250/2~50		
Sound pressure level (measured in anechoic room)		dB <A>	65.5	
Sound power level (measured in anechoic room)		dB <A>	86.5	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Set Model			PUHY-EP250YLM-A1 (-BS)		PUHY-EP300YLM-A1 (-BS)		PUHY-EP300YLM-A1 (-BS)	
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1		Propeller fan x 1	
	Air flow rate	m ³ /min	175		200		200	
		L/s	2,917		3,333		3,333	
		cfm	6,179		7,062		7,062	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	*3	Motor output	kW	0.92 x 1		0.92 x 1		0.92 x 1
External static press.			0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)	
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter		Inverter	
	Motor output	kW	6.9		8.1		8.1	
	Case heater	kW	-		-		-	
Lubricant		MEL32		MEL32		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			mm	1,710 (1,650 without legs) x 920 x 740	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,220 x 740	
			in.	67-3/8 (65 without legs) x 36-1/4 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-		-	
	Fan motor		-		-		-	
Refrigerant	Type x original charge		R410A x 7.5 kg (17 lbs)		R410A x 10.3 kg (23 lbs)		R410A x 10.3 kg (23 lbs)	
	Control		LEV and HIC circuit		LEV and HIC circuit		LEV and HIC circuit	
Net weight			kg (lbs)	200 (441)	243 (536)	243 (536)	243 (536)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	9.52 (3/8) Brazed		12.7 (1/2) Brazed		12.7 (1/2) Brazed	
	Gas pipe	mm (in.)	22.2 (7/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)					
Drawing	External		WKS94C150					
	Wiring		WKE94G039	WKE94G039	WKE94G039	WKE94G039	WKE94G039	
Standard attachment	Document		Installation Manual					
	Accessory		Refrigerant conn. pipe					
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G					
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.					

Notes:	Unit converter
1. Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h = kW x 3,412
2. Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm = m ³ /min x 35.31
3. External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs = kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Y (HIGH COP)

Model			PUHY-EP900YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	101.0	
		kcal/h	86,900	
		BTU/h	344,600	
	Power input	kW	27.22	
		Current input	A	
EER		kW/kW		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	113.0	
		kcal/h	97,200	
		BTU/h	385,600	
	Power input	kW	29.04	
		Current input	A	
COP		kW/kW		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15-P250/2-50		
Sound pressure level (measured in anechoic room)		dB <A>	66	
Sound power level (measured in anechoic room)		dB <A>	87	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Set Model			PUHY-EP300YLM-A1 (-BS)		PUHY-EP300YLM-A1 (-BS)		PUHY-EP300YLM-A1 (-BS)	
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1		Propeller fan x 1	
	Air flow rate	m ³ /min	200		200		200	
		L/s	3,333		3,333		3,333	
		cfm	7,062		7,062		7,062	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	*3	Motor output	kW	0.92 x 1		0.92 x 1		0.92 x 1
External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		
Compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		
Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		
Starting method		Inverter		Inverter		Inverter		
Motor output		kW	8.1		8.1		8.1	
Case heater		kW	-		-		-	
Lubricant		MEL32		MEL32		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			mm		mm		mm	
			1,710 (1,650 without legs) x 1,220 x 740		1,710 (1,650 without legs) x 1,220 x 740		1,710 (1,650 without legs) x 1,220 x 740	
			in.		in.		in.	
			67-3/8 (65 without legs) x 48-1/16 x 29-3/16		67-3/8 (65 without legs) x 48-1/16 x 29-3/16		67-3/8 (65 without legs) x 48-1/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-		-	
	Fan motor		-		-		-	
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		R410A x 10.3 kg (23 lbs)		R410A x 10.3 kg (23 lbs)	
	Control		LEV and HIC circuit					
Net weight			kg (lbs)		kg (lbs)		kg (lbs)	
			243 (536)		243 (536)		243 (536)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		12.7 (1/2) Brazed		12.7 (1/2) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)					
Drawing	External		WKS94C151					
	Wiring		WKE94G039		WKE94G039		WKE94G039	
Standard attachment	Document		Installation Manual					
	Accessory		Refrigerant conn. pipe					
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G					
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.					

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C.D.B./19°C.W.B. (81°F.D.B./66°F.W.B.), Outdoor: 35°C.D.B./24°C.W.B. (95°F.D.B./75°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C.D.B. (68°F.D.B.), Outdoor: 7°C.D.B./6°C.W.B. (45°F.D.B./43°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP950YSLM-A1 (-BS)		
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	108.0		
		kcal/h	92,900		
		BTU/h	368,500		
	Power input	kW	30.33		
		A	51.2-48.6-46.8		
EER		3.56			
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)		
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)		
Heating capacity (Nominal)	*2	kW	119.5		
		kcal/h	102,800		
		BTU/h	407,700		
	Power input	kW	32.03		
		A	54.0-51.3-49.5		
COP		3.73			
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)		
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		
Indoor unit connectable	Total capacity		50~130% of outdoor unit capacity		
	Model/Quantity		P15~P250/2~50		
Sound pressure level (measured in anechoic room)		dB <A>	66		
Sound power level (measured in anechoic room)		dB <A>	87		
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed		
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed		

Set Model						
Model		PUHY-EP300YLM-A1 (-BS)		PUHY-EP300YLM-A1 (-BS)		
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1	
	Air flow rate	m ³ /min	200		200	
		L/s	3,333		3,333	
		cfm	7,062		7,062	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	Motor output		0.92 x 1		0.92 x 1	
*3 External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter	
	Motor output		8.1		8.1	
	Case heater		-		-	
	Lubricant		MEL32		MEL32	
External finish		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		
External dimension H x W x D		mm	1,710 (1,650 without legs) x 1,220 x 740		1,710 (1,650 without legs) x 1,220 x 740	
		in.	67-3/8 (65 without legs) x 48-1/16 x 29-3/16		67-3/8 (65 without legs) x 48-1/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-	
	Fan motor		-		-	
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		R410A x 10.3 kg (23 lbs)	
	Control		LEV and HIC circuit			
Net weight		kg (lbs)	243 (536)		237 (523)	
Heat exchanger		Salt-resistant cross fin & aluminium tube				
HIC circuit (HIC: Heat Inter-Changer)		Copper pipe, tube-in-tube structure				
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		12.7 (1/2) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)				
Drawing	External		WKS94C151			
	Wiring		WKE94G039		WKE94G039	
Standard attachment	Document		Installation Manual			
	Accessory		Refrigerant conn. pipe			
Optional parts		Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G				
Remarks		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.				

Notes:	1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C.D.B./19°C.W.B. (81°F.D.B./66°F.W.B.), Outdoor: 35°C.D.B. /24°C.W.B. (95°F.D.B./75°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)		Unit converter BTU/h =kW x 3,412 cfm =m ³ /min x 35.31 lbs =kg/0.4536
	2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C.D.B. (68°F.D.B.), Outdoor: 7°C.D.B./6°C.W.B. (45°F.D.B./43°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)		
	3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).		
	*Above specification data is subject to rounding variation.		

1. SPECIFICATIONS

DATA G11

Y (HIGH COP)

Model			PUHY-EP1000YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	113.0	
		kcal/h	97,200	
		BTU/h	385,600	
	Power input	kW	31.04	
		A	52.4-49.7-47.9	
EER	kW/kW	3.64		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	127.0	
		kcal/h	109,200	
		BTU/h	433,300	
	Power input	kW	33.50	
		A	56.5-53.7-51.7	
COP	kW/kW	3.79		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15-P250/2-50		
Sound pressure level (measured in anechoic room)	dB <A>	66.5		
Sound power level (measured in anechoic room)	dB <A>	87		
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Set Model			PUHY-EP300YLM-A1 (-BS)		PUHY-EP300YLM-A1 (-BS)		PUHY-EP400YLM-A1 (-BS)	
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1		Propeller fan x 2	
	Air flow rate	m ³ /min	200		200		320	
		L/s	3,333		3,333		5,333	
		cfm	7,062		7,062		11,299	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	Motor output	kW	0.92 x 1		0.92 x 1		0.92 x 2	
*3	External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)	
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter		Inverter	
	Motor output	kW	8.1		8.1		10.9	
	Case heater	kW	-		-		-	
Lubricant		MEL32		MEL32		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			mm 1,710 (1,650 without legs) x 1,220 x 740		mm 1,710 (1,650 without legs) x 1,220 x 740		mm 1,710 (1,650 without legs) x 1,750 x 740	
			in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16		in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16		in. 67-3/8 (65 without legs) x 68-15/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-		-	
	Fan motor		-		-		-	
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		R410A x 10.3 kg (23 lbs)		R410A x 11.8 kg (27 lbs)	
	Control		LEV and HIC circuit					
Net weight			kg (lbs) 243 (536)		kg (lbs) 243 (536)		kg (lbs) 306 (675)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		12.7 (1/2) Brazed		15.88 (5/8) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)					
Drawing	External		WKS94C152					
	Wiring		WKE94G039		WKE94G039		WKE94G040	
Standard attachment	Document		Installation Manual					
	Accessory		Refrigerant conn. pipe					
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G					
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.					

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP1050YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	118.0	
		kcal/h	101,500	
		BTU/h	402,600	
	Power input	kW	34.40	
		A	58.0-55.1-53.1	
EER	kW/kW	3.43		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	132.0	
		kcal/h	113,500	
		BTU/h	450,400	
	Power input	kW	36.87	
		A	62.2-59.1-56.9	
COP	kW/kW	3.58		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15~P250/3~50		
Sound pressure level (measured in anechoic room)		dB <A>	66.5	
Sound power level (measured in anechoic room)		dB <A>	87.5	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Set Model			PUHY-EP300YLM-A1 (-BS)		PUHY-EP350YLM-A1 (-BS)		PUHY-EP400YLM-A1 (-BS)	
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1		Propeller fan x 2	
	Air flow rate	m ³ /min	200		200		320	
		L/s	3,333		3,333		5,333	
		cfm	7,062		7,062		11,299	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	*3 Motor output	kW	0.92 x 1		0.92 x 1		0.92 x 2	
External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter		Inverter	
	Motor output	kW	8.1		10.5		10.9	
	Case heater	kW	-		-		-	
Lubricant		MEL32		MEL32		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			mm	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,220 x 740	
			in.	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-		-	
	Fan motor		-		-		-	
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		R410A x 10.3 kg (23 lbs)		R410A x 11.8 kg (27 lbs)	
	Control		LEV and HIC circuit		LEV and HIC circuit		LEV and HIC circuit	
Net weight			kg (lbs)	243 (536)	237 (523)	306 (675)	306 (675)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		12.7 (1/2) Brazed		15.88 (5/8) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)	
Drawing	External		WKS94C152		WKS94C152		WKS94C152	
	Wiring		WKE94G039		WKE94G039		WKE94G040	
Standard attachment	Document		Installation Manual		Installation Manual		Installation Manual	
	Accessory		Refrigerant conn. pipe		Refrigerant conn. pipe		Refrigerant conn. pipe	
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G		Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G		Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G	
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.	

Notes:	Unit converter
1. Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2. Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B./68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3. External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Y (HIGH COP)

Model			PUHY-EP1100YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	124.0	
		kcal/h	106,600	
		BTU/h	423,100	
	Power input	kW	38.15	
		Current input	A	
EER		kW/kW		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	140.0	
		kcal/h	120,400	
		BTU/h	477,700	
	Power input	kW	41.17	
		Current input	A	
COP		kW/kW		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15-P250/3-50		
Sound pressure level (measured in anechoic room)		dB <A>	66.5	
Sound power level (measured in anechoic room)		dB <A>	87.5	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Model			PUHY-EP350YLM-A1 (-BS)	PUHY-EP350YLM-A1 (-BS)	PUHY-EP400YLM-A1 (-BS)
FAN	Type x Quantity		Propeller fan x 1	Propeller fan x 1	Propeller fan x 2
	Air flow rate	m ³ /min	200	200	320
		L/s	3,333	3,333	5,333
		cfm	7,062	7,062	11,299
	Control, Driving mechanism		Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor	Inverter-control, Direct-driven by motor
	*3	Motor output	kW	0.92 x 1	0.92 x 1
External static press.			0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)	0 Pa (0 mmH ₂ O)
Compressor	Type		Inverter scroll hermetic compressor	Inverter scroll hermetic compressor	Inverter scroll hermetic compressor
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	AC&R Works, MITSUBISHI ELECTRIC CORPORATION	AC&R Works, MITSUBISHI ELECTRIC CORPORATION
	Starting method		Inverter	Inverter	Inverter
	Motor output	kW	10.5	10.5	10.9
	Case heater	kW	-	-	-
Lubricant		MEL32			
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>
External dimension H x W x D			mm 1,710 (1,650 without legs) x 1,220 x 740	mm 1,710 (1,650 without legs) x 1,220 x 740	mm 1,710 (1,650 without legs) x 1,750 x 740
			in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16	in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16	in. 67-3/8 (65 without legs) x 68-15/16 x 29-3/16
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection	Over-heat protection, Over-current protection	Over-heat protection, Over-current protection
	Compressor		-	-	-
	Fan motor		-	-	-
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)	R410A x 10.3 kg (23 lbs)	R410A x 11.8 kg (27 lbs)
	Control		LEV and HIC circuit		
Net weight			kg (lbs) 237 (523)	kg (lbs) 237 (523)	kg (lbs) 306 (675)
Heat exchanger			Salt-resistant cross fin & aluminium tube		
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed	12.7 (1/2) Brazed	15.88 (5/8) Brazed
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed	28.58 (1-1/8) Brazed
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		
Drawing	External		WKS94C152		
	Wiring		WKE94G039	WKE94G039	WKE94G040
Standard attachment	Document		Installation Manual		
	Accessory		Refrigerant conn. pipe		
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G		
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP1150YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	130.0	
		kcal/h	111,800	
		BTU/h	443,600	
	Power input	kW	41.53	
		A	70.1-66.6-64.1	
EER	kW/kW	3.13		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	145.0	
		kcal/h	124,700	
		BTU/h	494,700	
	Power input	kW	44.47	
		A	75.0-71.3-68.7	
COP	kW/kW	3.26		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15~P250/3~50		
Sound pressure level (measured in anechoic room)		dB <A>	66.5	
Sound power level (measured in anechoic room)		dB <A>	87.5	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Set Model			PUHY-EP350YLM-A1 (-BS)		PUHY-EP350YLM-A1 (-BS)		PUHY-EP450YLM-A1 (-BS)	
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 1		Propeller fan x 2	
	Air flow rate	m ³ /min	200		200		370	
		L/s	3,333		3,333		6,167	
		cfm	7,062		7,062		13,065	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	Motor output	kW	0.92 x 1		0.92 x 1		0.92 x 2	
	*3 External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)	
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter		Inverter	
	Motor output	kW	10.5		10.5		12.4	
	Case heater	kW	-		-		-	
Lubricant		MEL32		MEL32		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			mm	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,220 x 740	
			in.	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-		-	
	Fan motor		-		-		-	
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		R410A x 10.3 kg (23 lbs)		R410A x 11.8 kg (27 lbs)	
	Control		LEV and HIC circuit		LEV and HIC circuit		LEV and HIC circuit	
Net weight			kg (lbs)	237 (523)	237 (523)	237 (523)	306 (675)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		12.7 (1/2) Brazed		15.88 (5/8) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		Auto-defrost mode (Reversed refrigerant cycle, Hot gas)	
Drawing	External		WKS94C152		WKS94C152		WKS94C152	
	Wiring		WKE94G039		WKE94G039		WKE94G040	
Standard attachment	Document		Installation Manual		Installation Manual		Installation Manual	
	Accessory		Refrigerant conn. pipe		Refrigerant conn. pipe		Refrigerant conn. pipe	
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G		Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G		Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G	
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.	

Notes:	Unit converter
1. Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2. Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B./68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3. External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Y (HIGH COP)

Model			PUHY-EP1200YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	136.0	
		kcal/h	117,000	
		BTU/h	464,000	
	Power input	kW	42.76	
		A	72.1-68.5-66.0	
EER	kW/kW	3.18		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	150.0	
		kcal/h	129,000	
		BTU/h	511,800	
	Power input	kW	45.45	
		A	76.7-72.8-70.2	
COP	kW/kW	3.30		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15-P250/3-50		
Sound pressure level (measured in anechoic room)	dB <A>	67		
Sound power level (measured in anechoic room)	dB <A>	87.5		
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Set Model			PUHY-EP350YLM-A1 (-BS)		PUHY-EP400YLM-A1 (-BS)		PUHY-EP450YLM-A1 (-BS)	
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 2		Propeller fan x 2	
	Air flow rate	m ³ /min	200		320		370	
		L/s	3,333		5,333		6,167	
		cfm	7,062		11,299		13,065	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	*3 Motor output	kW	0.92 x 1		0.92 x 2		0.92 x 2	
External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter		Inverter	
	Motor output	kW	10.5		10.9		12.4	
	Case heater	kW	-		-		-	
	Lubricant		MEL32		MEL32		MEL32	
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			mm 1,710 (1,650 without legs) x 1,220 x 740		mm 1,710 (1,650 without legs) x 1,750 x 740		mm 1,710 (1,650 without legs) x 1,750 x 740	
			in. 67-3/8 (65 without legs) x 48-1/16 x 29-3/16		in. 67-3/8 (65 without legs) x 68-15/16 x 29-3/16		in. 67-3/8 (65 without legs) x 68-15/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-		-	
	Fan motor		-		-		-	
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		R410A x 11.8 kg (27 lbs)		R410A x 11.8 kg (27 lbs)	
	Control		LEV and HIC circuit					
Net weight			kg (lbs) 237 (523)		kg (lbs) 306 (675)		kg (lbs) 306 (675)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		15.88 (5/8) Brazed		15.88 (5/8) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)					
Drawing	External		WKS94C153					
	Wiring		WKE94G039		WKE94G040		WKE94G040	
Standard attachment	Document		Installation Manual					
	Accessory		Refrigerant conn. pipe					
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G					
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.					

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP1250YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	140.0	
		kcal/h	120,400	
		BTU/h	477,700	
	Power input	kW	45.90	
		A	77.4-73.6-70.9	
EER	kW/kW	3.05		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	156.5	
		kcal/h	134,600	
		BTU/h	534,000	
	Power input	kW	49.36	
		A	83.3-79.1-76.2	
COP	kW/kW	3.17		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15~P250/3~50		
Sound pressure level (measured in anechoic room)		dB <A>	67.5	
Sound power level (measured in anechoic room)		dB <A>	88	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Set Model			PUHY-EP350YLM-A1 (-BS)		PUHY-EP450YLM-A1 (-BS)		PUHY-EP450YLM-A1 (-BS)	
FAN	Type x Quantity		Propeller fan x 1		Propeller fan x 2		Propeller fan x 2	
	Air flow rate	m ³ /min	200		370		370	
		L/s	3,333		6,167		6,167	
		cfm	7,062		13,065		13,065	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	*3 Motor output	kW	0.92 x 1		0.92 x 2		0.92 x 2	
External static press.		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter		Inverter	
	Motor output	kW	10.5		12.4		12.4	
	Case heater	kW	-		-		-	
Lubricant		MEL32		MEL32		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			mm	1,710 (1,650 without legs) x 1,220 x 740	1,710 (1,650 without legs) x 1,750 x 740	1,710 (1,650 without legs) x 1,750 x 740	1,710 (1,650 without legs) x 1,750 x 740	
			in.	67-3/8 (65 without legs) x 48-1/16 x 29-3/16	67-3/8 (65 without legs) x 68-15/16 x 29-3/16	67-3/8 (65 without legs) x 68-15/16 x 29-3/16	67-3/8 (65 without legs) x 68-15/16 x 29-3/16	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-		-	
	Fan motor		-		-		-	
Refrigerant	Type x original charge		R410A x 10.3 kg (23 lbs)		R410A x 11.8 kg (27 lbs)		R410A x 11.8 kg (27 lbs)	
	Control		LEV and HIC circuit		LEV and HIC circuit		LEV and HIC circuit	
Net weight			kg (lbs)	237 (523)	306 (675)	306 (675)	306 (675)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	12.7 (1/2) Brazed		15.88 (5/8) Brazed		15.88 (5/8) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)					
Drawing	External		WKS94C153					
	Wiring		WKE94G039	WKE94G040	WKE94G040	WKE94G040		
Standard attachment	Document		Installation Manual					
	Accessory		Refrigerant conn. pipe					
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G					
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.					

Notes:	Unit converter
1. Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2. Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3. External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Y (HIGH COP)

Model			PUHY-EP1300YSLM-A1 (-BS)	
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz	
Cooling capacity (Nominal)	*1	kW	146.0	
		kcal/h	125,600	
		BTU/h	498,200	
	Power input	kW	46.94	
		Current input	A	
EER		kW/kW		
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)	
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)	
Heating capacity (Nominal)	*2	kW	163.0	
		kcal/h	140,200	
		BTU/h	556,200	
	Power input	kW	50.62	
		Current input	A	
COP		kW/kW		
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)	
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)	
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity		
	Model/Quantity	P15-P250/3-50		
Sound pressure level (measured in anechoic room)		dB <A>	68	
Sound power level (measured in anechoic room)		dB <A>	88	
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed	
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed	

Model			PUHY-EP400YLM-A1 (-BS)		PUHY-EP450YLM-A1 (-BS)		PUHY-EP450YLM-A1 (-BS)	
FAN	Type x Quantity		Propeller fan x 2		Propeller fan x 2		Propeller fan x 2	
	Air flow rate	m ³ /min	320		370		370	
		L/s	5,333		6,167		6,167	
		cfm	11,299		13,065		13,065	
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor		Inverter-control, Direct-driven by motor	
	*3	Motor output	kW	0.92 x 2		0.92 x 2		0.92 x 2
External static press.			0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)		0 Pa (0 mmH ₂ O)	
Compressor	Type		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor		Inverter scroll hermetic compressor	
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		AC&R Works, MITSUBISHI ELECTRIC CORPORATION	
	Starting method		Inverter		Inverter		Inverter	
	Motor output	kW	10.9		12.4		12.4	
	Case heater	kW	-		-		-	
Lubricant		MEL32		MEL32		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>	
External dimension H x W x D			mm		mm		mm	
			in.		in.		in.	
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)	
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection	
	Compressor		-		-		-	
	Fan motor		-		-		-	
Refrigerant	Type x original charge		R410A x 11.8 kg (27 lbs)		R410A x 11.8 kg (27 lbs)		R410A x 11.8 kg (27 lbs)	
	Control				LEV and HIC circuit			
Net weight			kg (lbs)		kg (lbs)		kg (lbs)	
			306 (675)		306 (675)		306 (675)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube	
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure	
Pipe between unit and distributor	Liquid pipe	mm (in.)	15.88 (5/8) Brazed		15.88 (5/8) Brazed		15.88 (5/8) Brazed	
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed	
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)					
Drawing	External		WKS94C154					
	Wiring		WKE94G040		WKE94G040		WKE94G040	
Standard attachment	Document		Installation Manual					
	Accessory		Refrigerant conn. pipe					
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G					
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.					

Notes:	Unit converter
1.Nominal cooling conditions (subject to JIS B8615-1) Indoor: 27°C.D.B./19°C.W.B. (81°F.D.B./66°F.W.B.), Outdoor: 35°C.D.B./24°C.W.B. (95°F.D.B./75°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	BTU/h =kW x 3,412
2.Nominal heating conditions (subject to JIS B8615-1) Indoor: 20°C.D.B. (68°F.D.B.), Outdoor: 7°C.D.B./6°C.W.B. (45°F.D.B./43°F.W.B.) Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)	cfm =m ³ /min x 35.31
3.External static pressure option is available (30Pa, 60Pa/3.1mmH ₂ O, 6.1mmH ₂ O).	lbs =kg/0.4536
	*Above specification data is subject to rounding variation.

1. SPECIFICATIONS

DATA G11

Model			PUHY-EP1350YSLM-A1 (-BS)		
Power source			3-phase 4-wire 380-400-415 V 50/60 Hz		
Cooling capacity (Nominal)	*1	kW	150.0		
		kcal/h	129,000		
		BTU/h	511,800		
	Power input	kW	50.00		
		Current input	A	84.4-80.1-77.2	
EER	kW/kW	3.00			
Temp. range of cooling	Indoor	W.B.	15.0~24.0°C (59~75°F)		
	Outdoor	D.B.	-5.0~52.0°C (23~126°F)		
Heating capacity (Nominal)	*2	kW	168.0		
		kcal/h	144,500		
		BTU/h	573,200		
	Power input	kW	54.36		
		Current input	A	91.7-87.1-84.0	
COP	kW/kW	3.09			
Temp. range of heating	Indoor	D.B.	15.0~27.0°C (59~81°F)		
	Outdoor	W.B.	-20.0~15.5°C (-4~60°F)		
Indoor unit connectable	Total capacity	50~130% of outdoor unit capacity			
	Model/Quantity	P15~P250/3~50			
Sound pressure level (measured in anechoic room)		dB <A>	68		
Sound power level (measured in anechoic room)		dB <A>	88		
Refrigerant piping diameter	Liquid pipe	mm (in.)	19.05 (3/4) Brazed		
	Gas pipe	mm (in.)	41.28 (1-5/8) Brazed		

Set Model

Model			PUHY-EP450YLM-A1 (-BS)	PUHY-EP450YLM-A1 (-BS)	PUHY-EP450YLM-A1 (-BS)
FAN	Type x Quantity		Propeller fan x 2		
	Air flow rate	m ³ /min	370		
		L/s	6,167		
		cfm	13,065		
	Control, Driving mechanism		Inverter-control, Direct-driven by motor		
	Motor output	kW	0.92 x 2		
	*3 External static press.		0 Pa (0 mmH ₂ O)		
Compressor	Type		Inverter scroll hermetic compressor		
	Manufacture		AC&R Works, MITSUBISHI ELECTRIC CORPORATION		
	Starting method		Inverter		
	Motor output	kW	12.4		
	Case heater	kW	-		
	Lubricant		MEL32		
External finish			Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>		Pre-coated galvanized steel sheets (+powder coating for -BS type) <MUNSELL 5Y 8/1 or similar>
External dimension H x W x D			1,710 (1,650 without legs) x 1,750 x 740 67-3/8 (65 without legs) x 68-15/16 x 29-3/16		1,710 (1,650 without legs) x 1,750 x 740 67-3/8 (65 without legs) x 68-15/16 x 29-3/16
Protection devices	High pressure protection		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)		High pressure sensor, High pressure switch at 4.15 MPa (601 psi)
	Inverter circuit (COMP./FAN)		Over-heat protection, Over-current protection		Over-heat protection, Over-current protection
	Compressor		-		-
	Fan motor		-		-
Refrigerant	Type x original charge		R410A x 11.8 kg (27 lbs)		R410A x 11.8 kg (27 lbs)
	Control		LEV and HIC circuit		
Net weight	kg (lbs)	306 (675)		306 (675)	
Heat exchanger			Salt-resistant cross fin & aluminium tube		Salt-resistant cross fin & aluminium tube
HIC circuit (HIC: Heat Inter-Changer)			Copper pipe, tube-in-tube structure		Copper pipe, tube-in-tube structure
Pipe between unit and distributor	Liquid pipe	mm (in.)	15.88 (5/8) Brazed		15.88 (5/8) Brazed
	Gas pipe	mm (in.)	28.58 (1-1/8) Brazed		28.58 (1-1/8) Brazed
Defrosting method			Auto-defrost mode (Reversed refrigerant cycle, Hot gas)		
Drawing	External		WKS94C154		
	Wiring		WKE94G040		WKE94G040
Standard attachment	Document		Installation Manual		
	Accessory		Refrigerant conn. pipe		
Optional parts			Outdoor Twinning kit: CMY-Y300VBK3 Joint: CMY-Y102SS/LS-G2, CMY-Y202/302S-G2 Header: CMY-Y104/108/1010-G		
Remarks			Details on foundation work, duct work, insulation work, electrical wiring, power source switch, and other items shall be referred to the Installation Manual. Due to continuing improvement, above specifications may be subject to change without notice.		

Notes:

- Nominal cooling conditions (subject to JIS B8615-1)
Indoor: 27°C D.B./19°C W.B. (81°F D.B./66°F W.B.), Outdoor: 35°C D.B./24°C W.B. (95°F D.B./75°F W.B.)
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)
- Nominal heating conditions (subject to JIS B8615-1)
Indoor: 20°C D.B. (68°F D.B.), Outdoor: 7°C D.B./6°C W.B. (45°F D.B./43°F W.B.)
Pipe length: 7.5 m (24-9/16 ft.), Level difference: 0 m (0 ft.)
- External static pressure option is available (30Pa, 60Pa/3.1mmH₂O, 6.1mmH₂O).

Unit converter

BTU/h	=kW x 3,412
cfm	=m ³ /min x 35.31
lbs	=kg/0.4536

*Above specification data is subject to rounding variation.

PUHY-EP200, 250YLM-A1 (-BS)

Unit: mm

- <Accessories>
 ● Connecting pipe
 <Gas>
 · Pipe (ID ϕ 28.58×OD ϕ 22.2) ... EP200, EP250 1 pc.
 · Elbow (ID ϕ 28.58×OD ϕ 28.58) ... EP200, EP250 1 pc.
 <Liquid>
 · Pipe (ID ϕ 9.52×ID ϕ 12.7) ... EP250 1 pc.

Note 1. Please refer to the next page for information regarding necessary spacing around the unit and foundation work.


- The detachable leg can be removed at site.
- At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C.

Connecting pipe specifications

Model	Refrigerant pipe		Diameter	
	Liquid	Gas	Liquid	Gas
PUHY-EP200YLM-A1(-BS)	ϕ 9.52 Braze ^{*1}	ϕ 22.2 Braze ^{*1}	ϕ 9.52	ϕ 28.58
PUHY-EP250YLM-A1(-BS)	ϕ 9.52 Braze ^{*1}	ϕ 22.2 Braze ^{*1,2}	ϕ 9.52	ϕ 28.58

*1 Use the included connecting pipe and connect to the refrigerant service valve piping

*2 Furthest piping length (OU from IU) \geq 90m

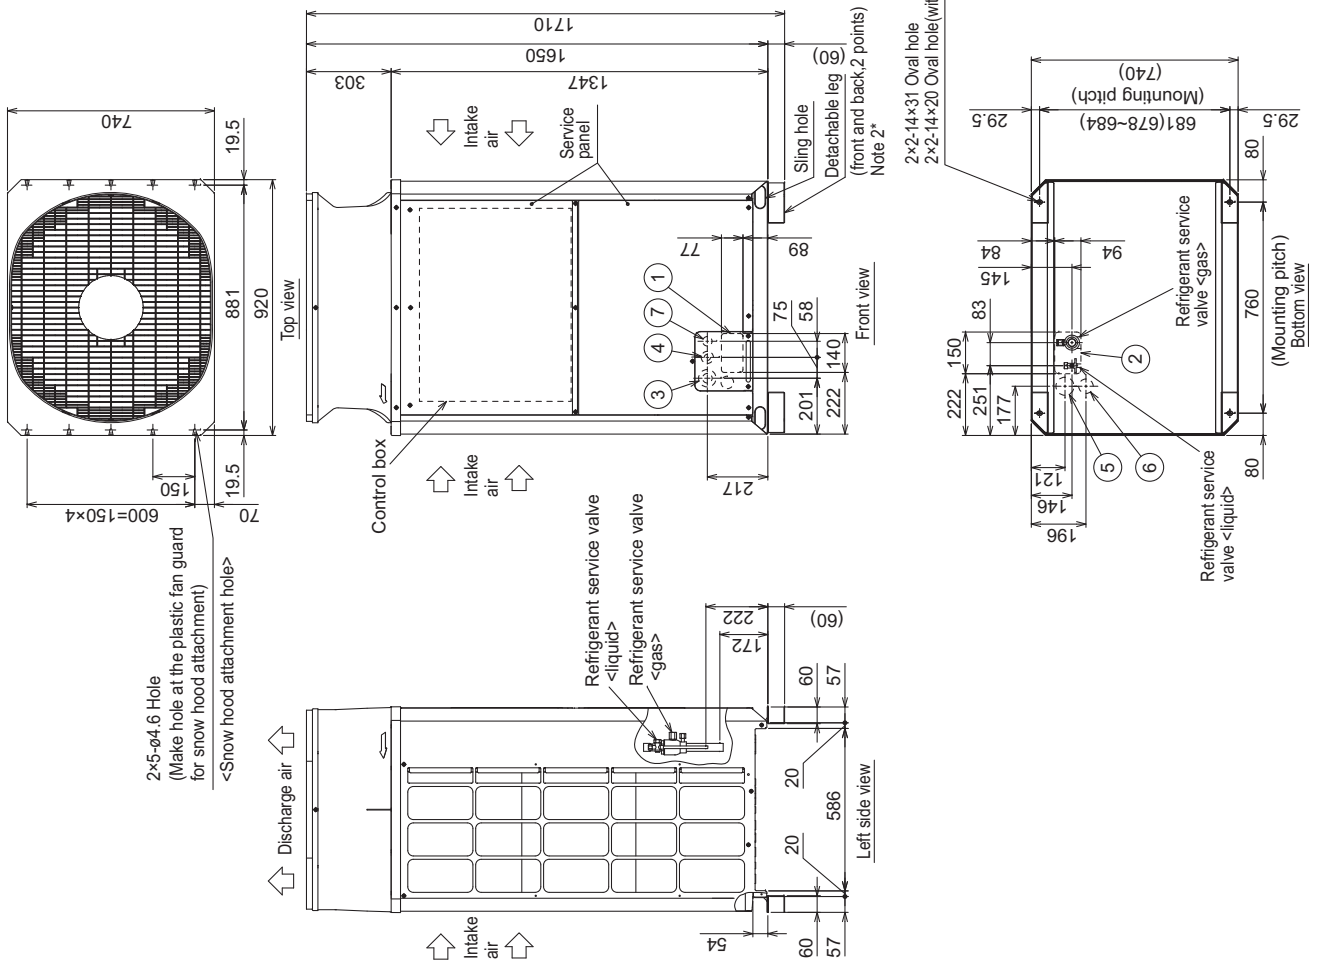

NO.	Usage	Specifications
①	For pipes	Front through hole 140 × 77 Knockout hole
②		Bottom through hole 150 × 94 Knockout hole
③	For wires	Front through hole ϕ 65 or ϕ 40 Knockout hole
④		Front through hole ϕ 52 or ϕ 27 Knockout hole
⑤		Bottom through hole ϕ 65 Knockout hole
⑥		Bottom through hole ϕ 52 Knockout hole
⑦	For transmission cables	Front through hole ϕ 34 Knockout hole

Y HIGH COP

PUHY-EP200, 250YLM-A1 (-BS)

Unit: mm

Y (HIGH COP)

● In case of collective installation

- When multiple units are installed adjacent to each other, secure enough space to allow for air circulation and walkway between groups of units as shown in the figures below.
- At least two sides must be left open.
- As with the single installation, add the height that exceeds the height limit to the figures that are marked with an asterisk.
- If there is a wall at both the front and the rear of the unit, install up to six units consecutively in the side direction and provide a space of 1000mm or more as inlet space/ passage space for each six units.

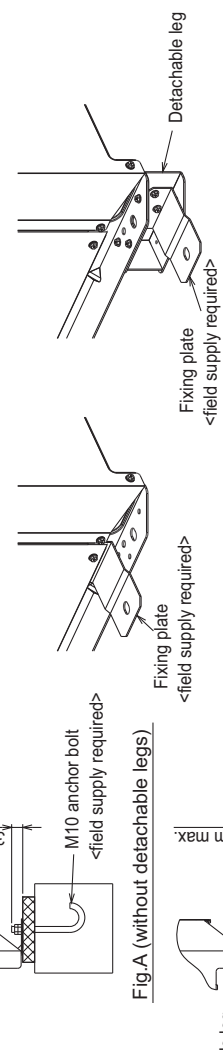
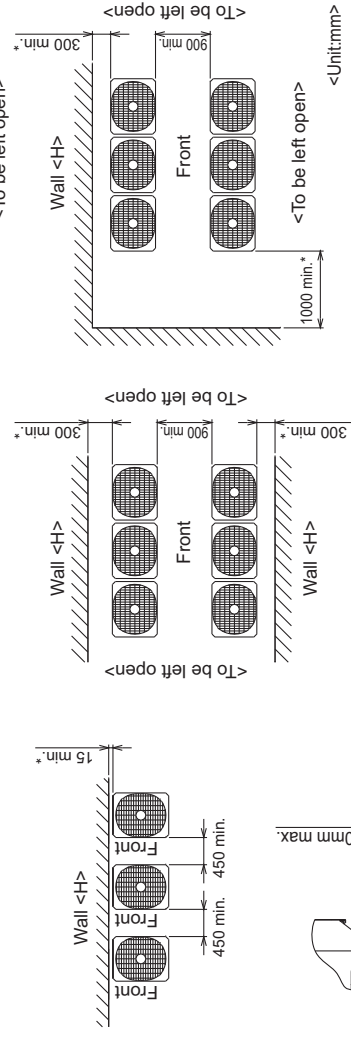
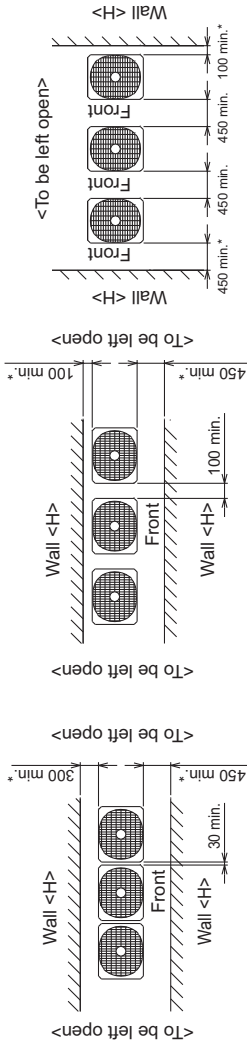



Fig.D (with detachable legs)

Fig.C (without detachable legs)


1. Required space around the unit

● In case of single installation

- Secure enough space around the unit as shown in the figure below.
 - With a space of at least 100mm to the wall on the back of the unit

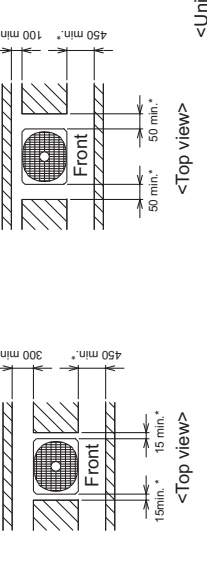

- When the height of the walls on the front, back or on the sides exceeds the wall height limit as defined below, add the height that exceeds the height limit to the figures that are marked with an asterisk.

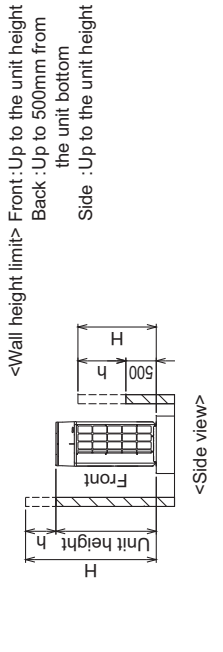

2. Foundation work

- Take into consideration the surface strength, water drainage route, piping route, and wiring route when preparing the installation site.
 - Note that the drain water comes out of the unit during operation.
- Build the foundation in such way that the corner of the installation leg is securely supported as shown in the right figure.
 - When using a rubber isolating cushion, please ensure it is large enough to cover the entire width of each of the unit's legs.
- The protrusion length of the anchor bolt must not exceed 30mm.
- Use four fixing plates as shown in the right figure.
 - When using post-installed anchor bolts.
 - To prevent small animals and water and snow from entering the unit and damaging its parts, close the gap around the edges of through holes for pipes and wires with filler plates.
- When the pipes or cables are routed at the bottom of the unit, make sure that the through hole at the base of the unit does not get blocked with the installation base.
- Refer to the Installation Manual when installing units on an installation base.





Fig.A (without detachable legs)

Fig.B (with detachable legs)




Fig.C (without detachable legs)




Fig.D (with detachable legs)

PUHY-EP300, 350YLM-A1 (-BS)

Unit: mm


- <Accessories>
 ● Connecting pipe
 <Gas>
 -Elbow (ID ϕ 28.58 \times OD ϕ 28.58) ... EP300,EP350 1pc.
 <Liquid>
 -Pipe (ID ϕ 12.7 \times ID ϕ 9.52) ... EP300 1pc.

Note1 Please refer to the next page for information regarding necessary spacing around the unit and foundation work.
 2.The detachable leg can be removed at site.
 3.At brazing of pipes,wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C.

Connecting pipe specifications

Model	Refrigerant pipe		Service valve	
	Liquid	Gas	Liquid	Gas
PUHY-EP300YLM-A1(-BS)	ϕ 9.52 Brazed (ϕ 12.7 Brazed)*1,2	ϕ 28.58 Brazed*1	ϕ 12.7	ϕ 28.58
PUHY-EP350YLM-A1(-BS)	ϕ 12.7 Brazed*1			

*1 Use the included connecting pipe and connect to the refrigerant service valve piping
 *2 Furthest piping length (OU from IU) \geq 40m

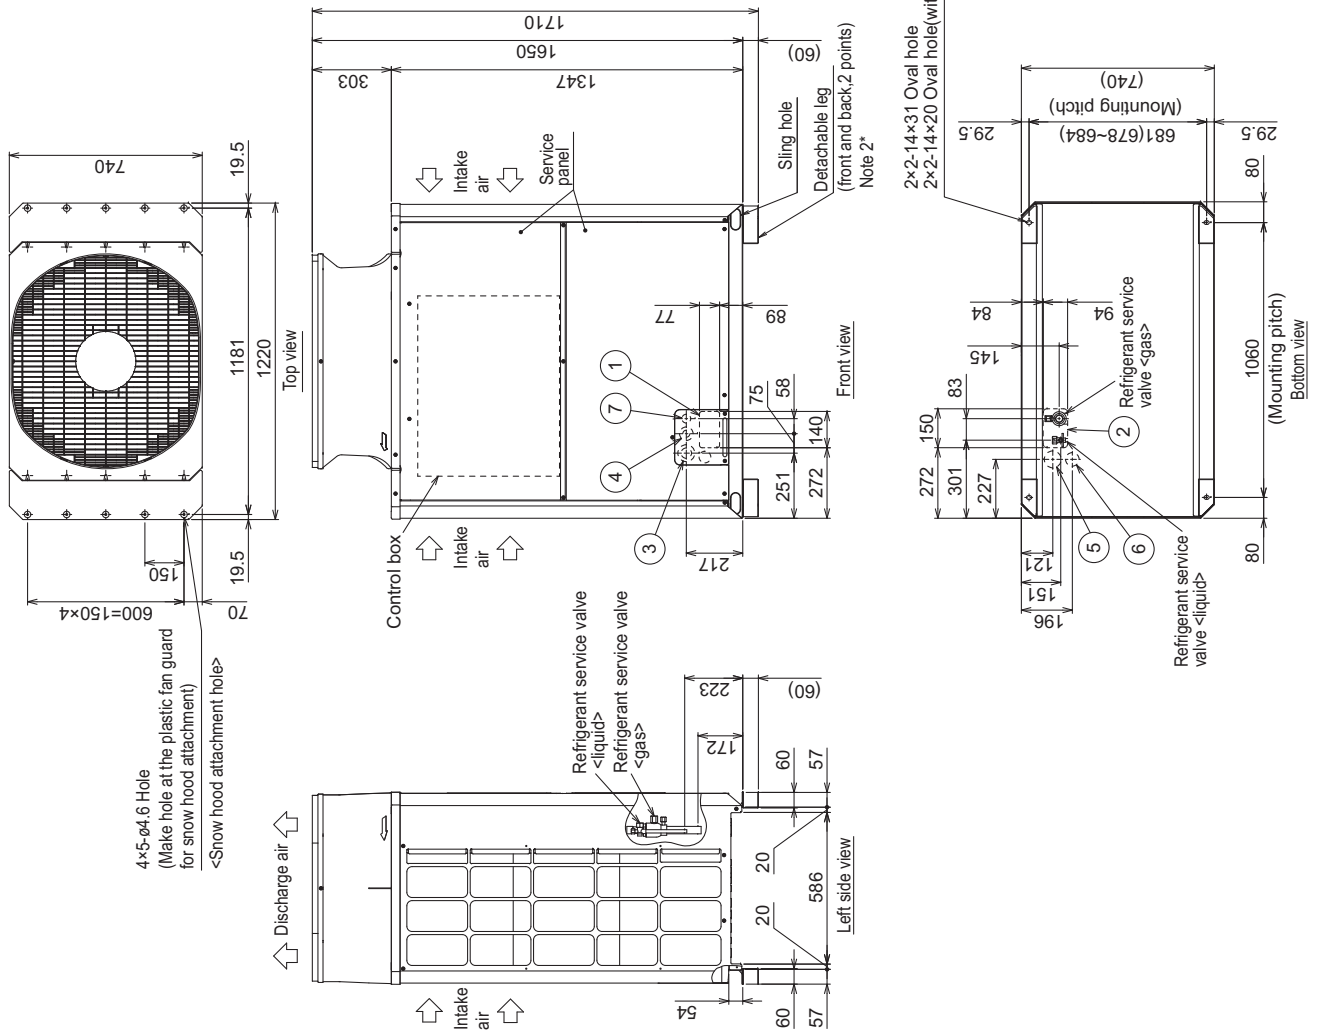

NO.	Usage	Specifications
①	Front through hole	140 x 77 Knockout hole
②	Bottom through hole	150 x 94 Knockout hole
③	Front through hole	ϕ 65 or ϕ 40 Knockout hole
④	Front through hole	ϕ 52 or ϕ 27 Knockout hole
⑤	Bottom through hole	ϕ 65 Knockout hole
⑥	Bottom through hole	ϕ 52 Knockout hole
⑦	For transmission cables	ϕ 34 Knockout hole


Y HIGH COP

PUHY-EP300, 350YLM-A1 (-BS)


Unit: mm

● In case of collective installation

- ① When multiple units are installed adjacent to each other, secure enough space to allow for air circulation and walkway between groups of units as shown in the figures below.
- ② At least two sides must be left open.
- ③ As with the single installation, add the height that exceeds the height limit <h> to the figures that are marked with an asterisk.
- ④ If there is a wall at both the front and the rear of the unit, install up to six units consecutively in the side direction and provide a space of 1000mm or more as inlet space/ passage space for each six units.

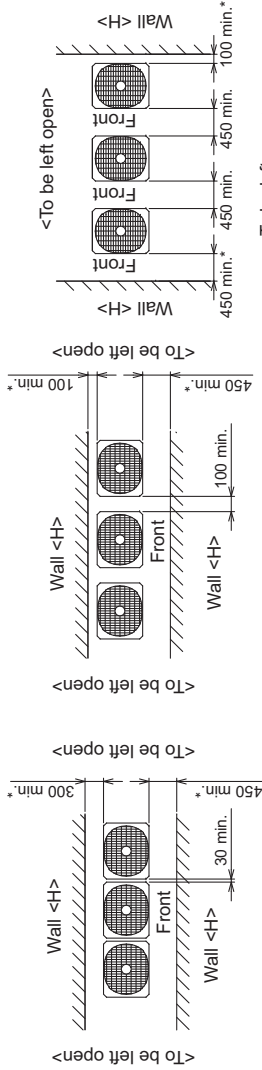

<Wall height limit> Front: Up to the unit height
 Back: Up to 500mm from the unit bottom
 Side : Up to the unit height



2. Foundation work

- ① Take into consideration the surface strength, water drainage route, piping route, and wiring route when preparing the installation site.
 <Note that the drain water comes out of the unit during operation.>
- ② Build the foundation in such way that the corner of the installation leg is securely supported as shown in the right figure (Fig.A,B)
 When using a rubber isolating cushion, please ensure it is large enough to cover the entire width of each of the unit's legs.
- ③ The protrusion length of the anchor bolt must not exceed 30mm. (Fig.A,B)
- ④ Use four fixing plates as shown in the right figure <field supply required> when using post-installed anchor bolts. (Fig.C,D)
- ⑤ To prevent small animals and water and snow from entering the unit and damaging its parts, close the gap around the edges of through holes for pipes and wires with filler plates <field supply required>.
- ⑥ When the pipes or cables are routed at the bottom of the unit, make sure that the through hole at the base of the unit does not get blocked with the installation base.
- ⑦ Refer to the Installation Manual when installing units on an installation base.




Fig.A (without detachable legs)




Fig.B (with detachable legs)




Fig.C (without detachable legs)

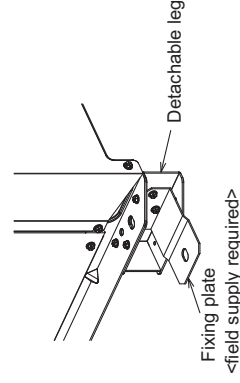


Fig.D (with detachable legs)

PUHY-EP400, 450, 500YLM-A1 (-BS)

Unit: mm

- <Accessories>
- Connecting pipe
- <Gas>
 - Elbow(IDø28.58×ODø28.58) ... EP400,EP450,EP500 1pc.
- <Liquid>
 - Pipe (IDø15.88×ODø12.7) ... EP400 1pc.
 - Pipe (IDø15.88×IDø12.7) ... EP400 1pc.


Note 1. Please refer to the next page for information regarding necessary spacing around the unit and foundation work.

2. The detachable leg can be removed at site.
3. At brazing of pipes, wrap the refrigerant service valve with wet cloth and keep the temperature of refrigerant service valve under 120°C.

Connecting pipe specifications

Model	Refrigerant pipe		Diameter	
	Liquid	Gas	Liquid	Service valve
PUHY-EP400YLM-A1(-BS)	ø12.7 Brazed*1	Gas	ø12.7	Gas
PUHY-EP450YLM-A1(-BS)	ø15.88 Brazed*1	Gas	ø15.88 Brazed*1	Gas
PUHY-EP500YLM-A1(-BS)	ø15.88 Brazed*1	Gas	ø15.88 Brazed*1	Gas

*1 Use the included connecting pipe and connect to the refrigerant service valve piping

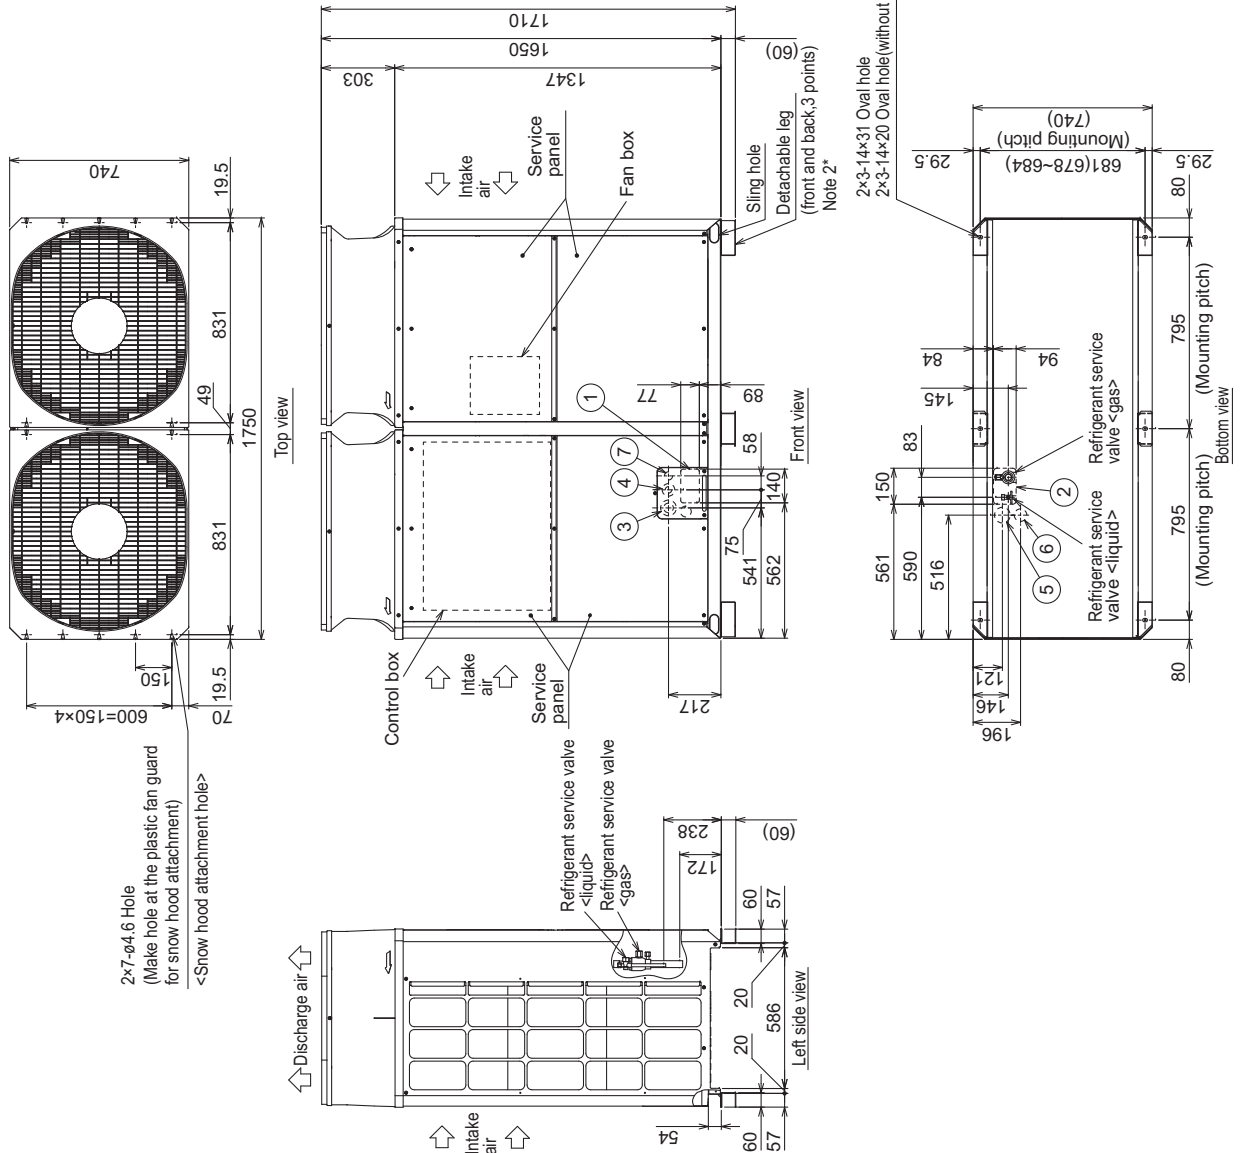

NO.	Usage	Specifications
①	Front through hole	140 x 77 Knockout hole
②	Bottom through hole	150 x 94 Knockout hole
③	Front through hole	ø65 or ø40 Knockout hole
④	Front through hole	ø65 or ø27 Knockout hole
⑤	Bottom through hole	ø65 Knockout hole
⑥	Bottom through hole	ø52 Knockout hole
⑦	For transmission cables	Front through hole ø52 Knockout hole
		ø34 Knockout hole


PUHY-EP400, 450, 500YLM-A1 (-BS)

Unit: mm

Y (HIGH COP)

● In case of collective installation

- ① When multiple units are installed adjacent to each other, secure enough space to allow for air circulation and walkway between groups of units as shown in the figures below.
- ② At least two sides must be left open.
- ③ As with the single installation, add the height that exceeds the height limit to the figures that are marked with an asterisk.
- ④ If there is a wall at both the front and the rear of the unit, install up to three units consecutively in the side direction and provide a space of 1000mm or more as inlet space/ passage space for each three units.

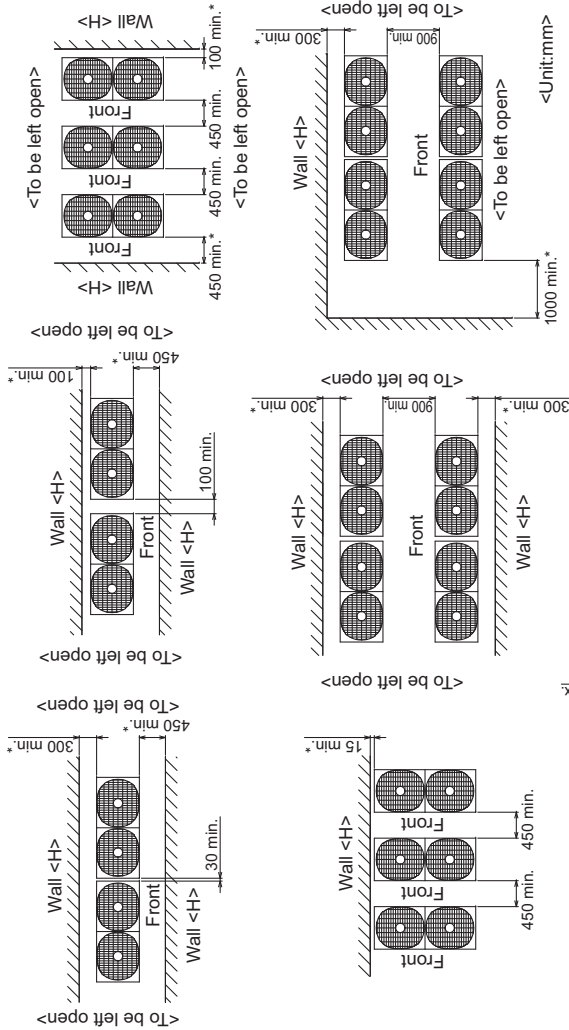


1. Required space around the unit


● In case of single installation

- ① Secure enough space around the unit as shown in the figure below.

· With a space of at least 100mm to the wall on the back of the unit

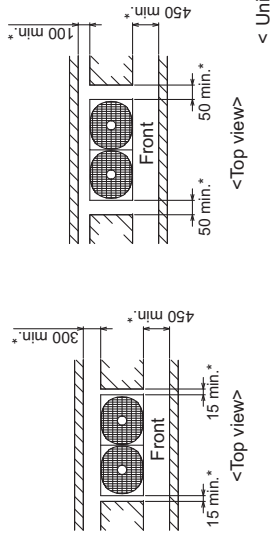

- ② When the height of the walls on the front, back or on the sides <H> exceeds the wall height limit as defined below add the height that exceeds the height limit <h> to the figures that are marked with an asterisk.

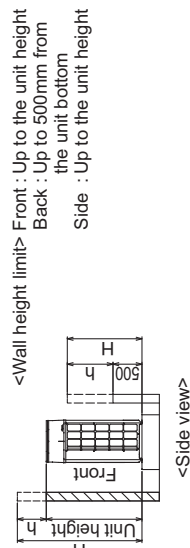

2. Foundation work

- ① Take into consideration the surface strength, water drainage route, piping route, and wiring route when preparing the installation site.
<Note that the drain water comes out of the unit during operation.>
- ② Build the foundation in such way that the corner of the installation leg is securely supported as shown in the right figure. (Fig.A,B)
When using a rubber isolating cushion, please ensure it is large enough to cover the entire width of each of the unit's legs.
- ③ The protrusion length of the anchor bolt must not exceed 30mm. (Fig.A,B)
- ④ Use four fixing plates as shown in the right figure <field supply required> when using post-installed anchor bolts. (Fig.C,D)
- ⑤ To prevent small animals and water and snow from entering the unit and damaging its parts, close the gap around the edges of through holes for pipes and wires with filler plates <field supply required>.
- ⑥ When the pipes or cables are routed at the bottom of the unit, make sure that the through hole at the base of the unit does not get blocked with the installation base.
- ⑦ Refer to the Installation Manual when installing units on an installation base.




Fig.A (without detachable legs)




Fig.B (with detachable legs)




Fig.C (without detachable legs)





Fig.D (with detachable legs)

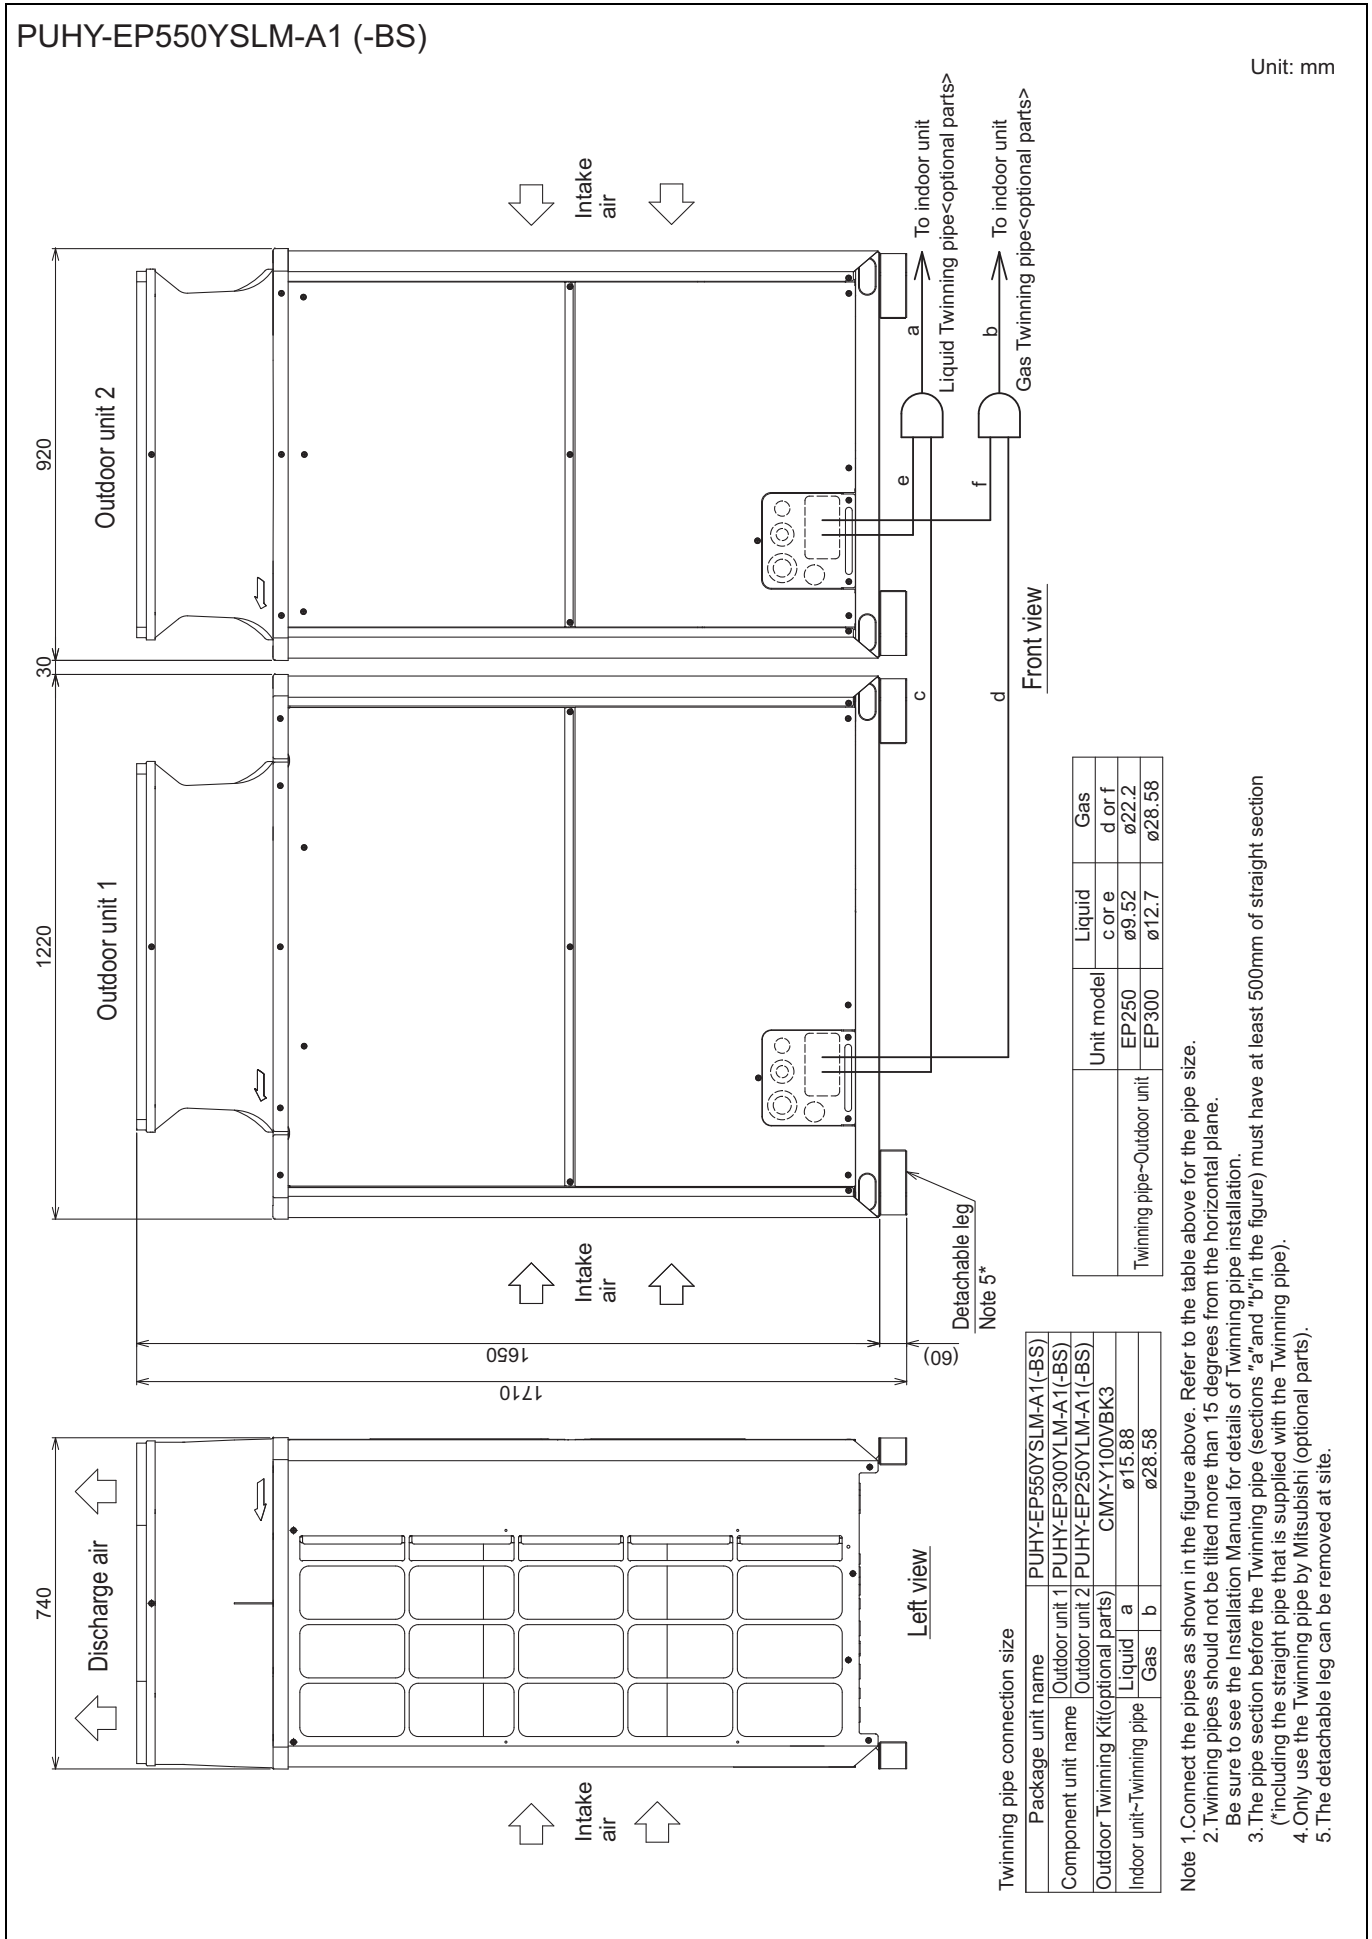


Y HIGH COP

PUHY-EP600YSLM-A1 (-BS)

Unit: mm

Y (HIGH COP)

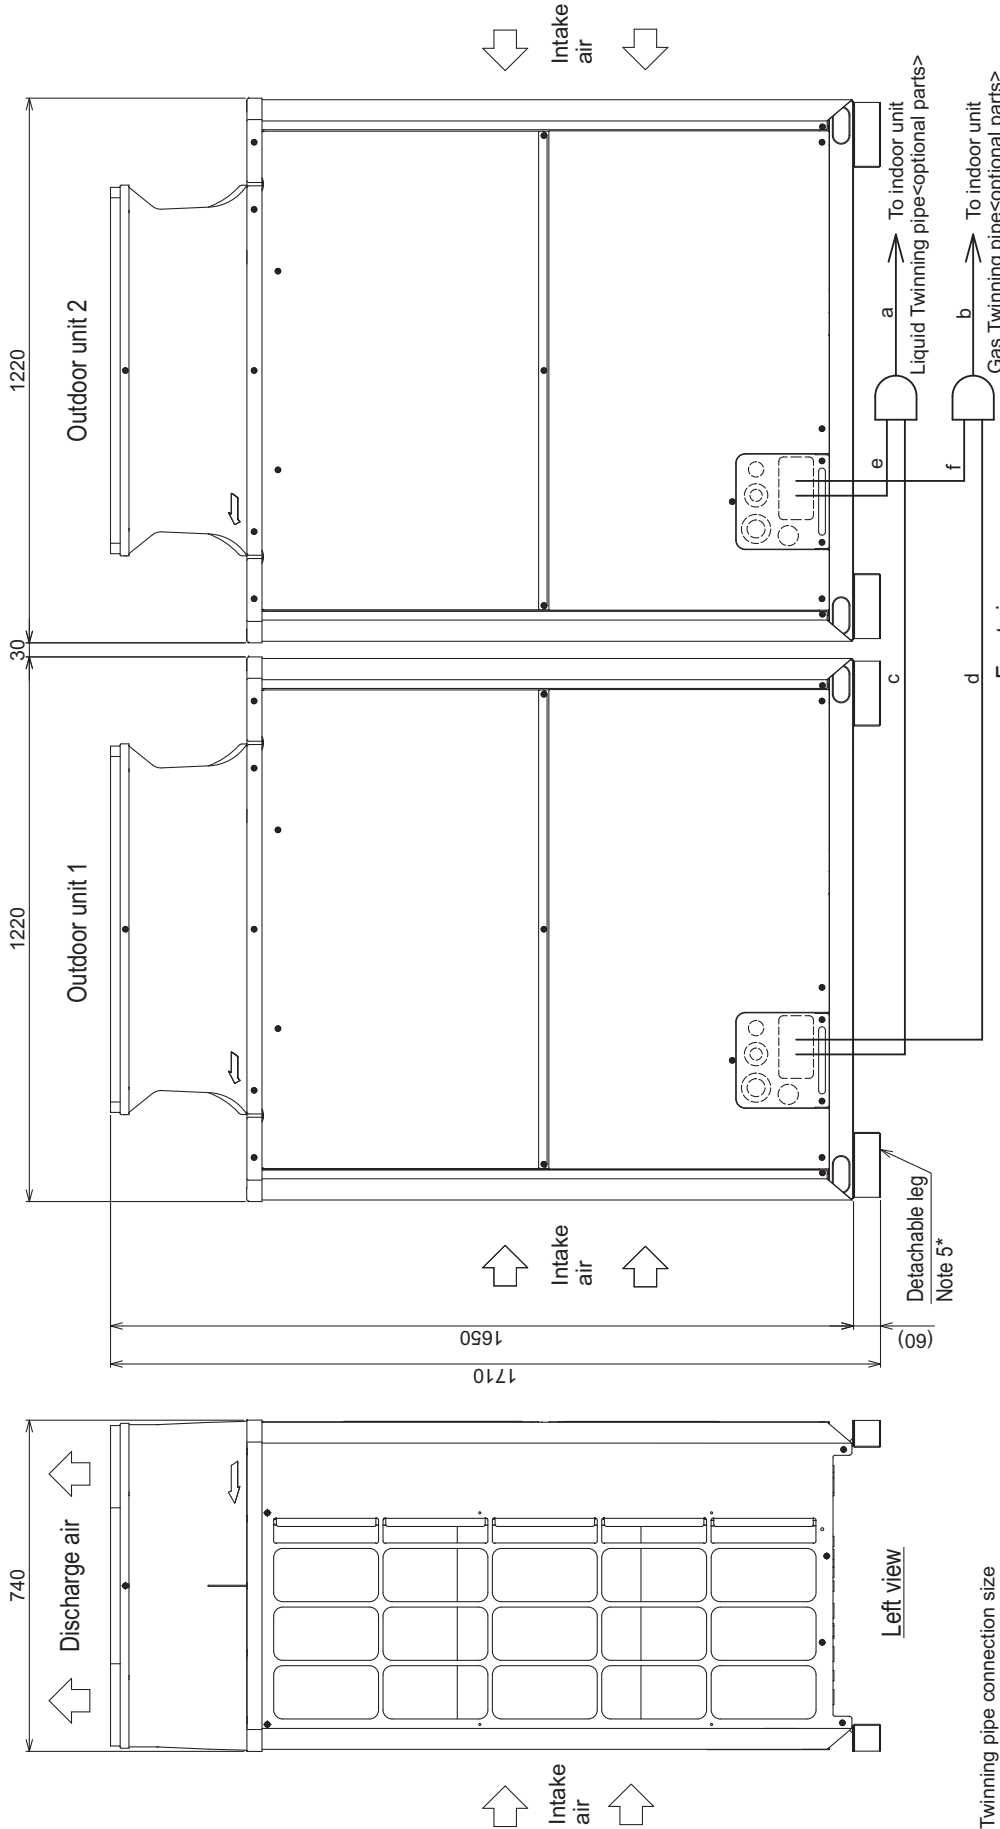


Twinning pipe connection size

Package unit name	PUHY-EP600YSLM-A1(-BS)
Component unit name	Outdoor unit 1 PUHY-EP300YLM-A1(-BS) Outdoor unit 2 PUHY-EP300YLM-A1(-BS)
Outdoor Twinning Kit(optional parts)	CMY-Y100VBK3
Indoor unit~Twinning pipe	Liquid a ø15.88 Gas b ø28.58

Unit model	EP300	Gas d or f
Twinning pipe-Outdoor unit	EP300	Liquid c or e ø12.7
		Gas ø28.58

1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.
2. Twinning pipes should not be tilted more than 15 degrees from the horizontal plane. Be sure to see the Installation Manual for details of Twinning pipe installation.
3. The pipe section before the Twinning pipe (sections "a" and "b" in the figure) must have at least 500mm of straight section (*including the straight pipe that is supplied with the Twinning pipe).
4. Only use the Twinning pipe by Mitsubishi (optional parts).
5. The detachable leg can be removed at site.

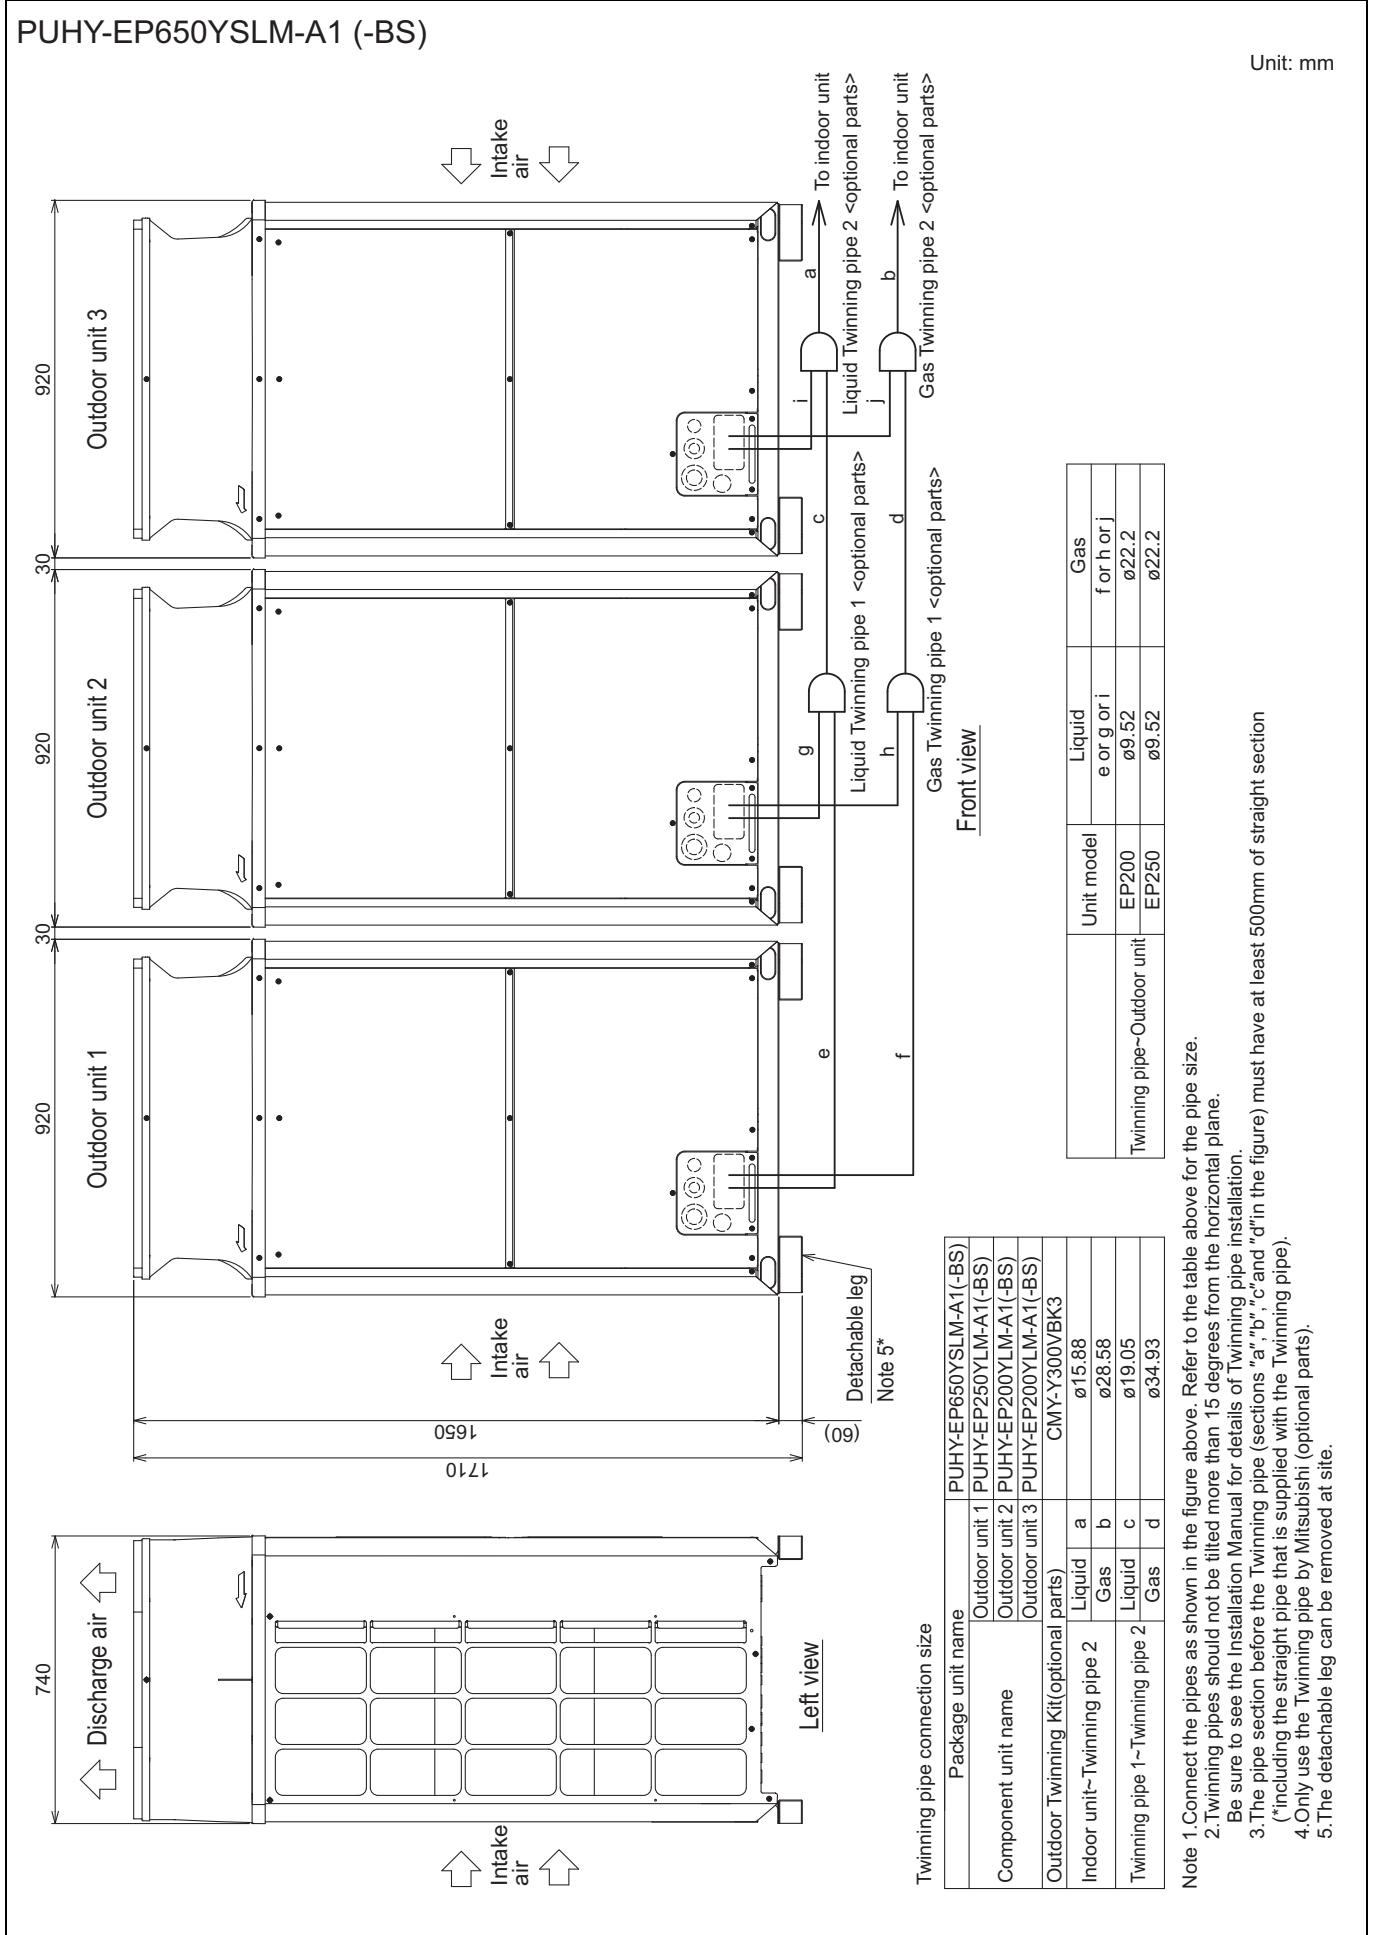


Y HIGH COP

PUHY-EP700, 750YSLM-A1 (-BS)

Unit: mm

Y (HIGH COP)

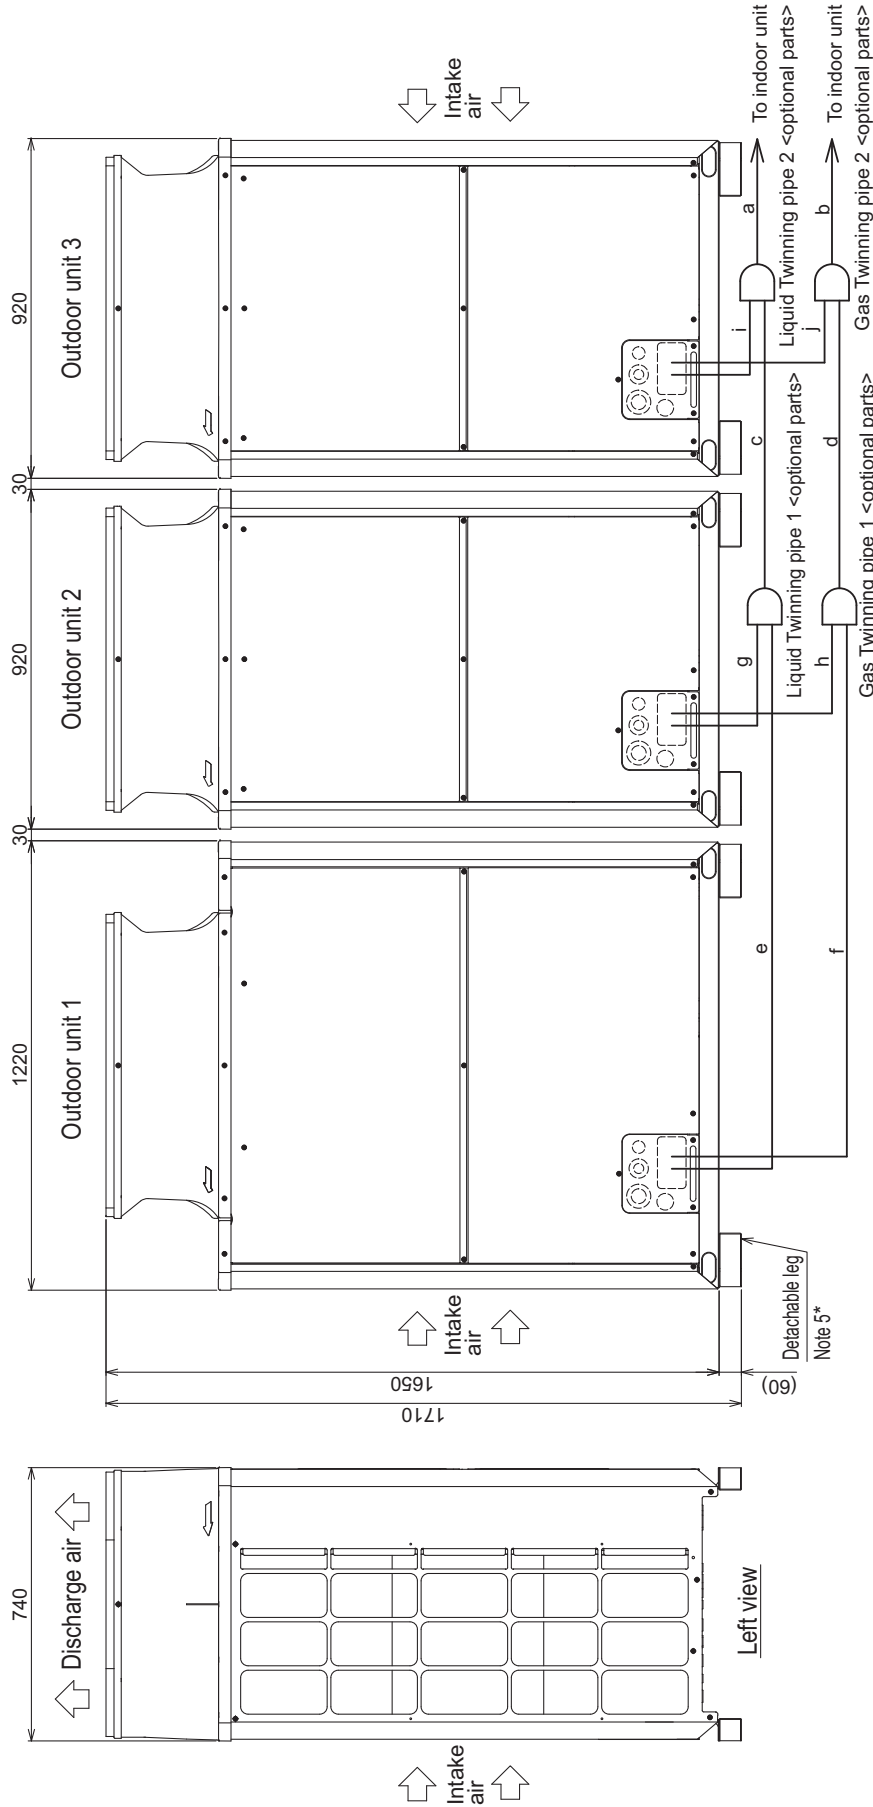


Front view

Twinning pipe connection size

Package unit name	PUHY-EP700YSLM-A1(-BS)	PUHY-EP750YSLM-A1(-BS)
Outdoor unit 1	PUHY-EP300YLM-A1(-BS)	PUHY-EP300YLM-A1(-BS)
Outdoor unit 2	PUHY-EP200YLM-A1(-BS)	PUHY-EP250YLM-A1(-BS)
Outdoor unit 3	PUHY-EP200YLM-A1(-BS)	PUHY-EP200YLM-A1(-BS)
Outdoor Twinning Kit(optional parts)	CMY-Y300VBK3	
Indoor unit~Twinning pipe 2	Liquid	a
	Gas	b
Twinning pipe 1~Twinning pipe 2	Liquid	c
	Gas	d

Unit model	Liquid	Gas
EP200	e or g or i ø9.52	f or h or j ø22.2
EP250	ø9.52	ø22.2
EP300	ø12.7	ø28.58


- Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.
 2. Twinning pipes should not be tilted more than 15 degrees from the horizontal plane.
 Be sure to see the Installation Manual for details of Twinning pipe installation.
 3. The pipe section before the Twinning pipe (sections "a", "b", "c" and "d" in the figure) must have at least 500mm of straight section (*including the straight pipe that is supplied with the Twinning pipe).
 4. Only use the Twinning pipe by Mitsubishi (optional parts).
 5. The detachable leg can be removed at site.

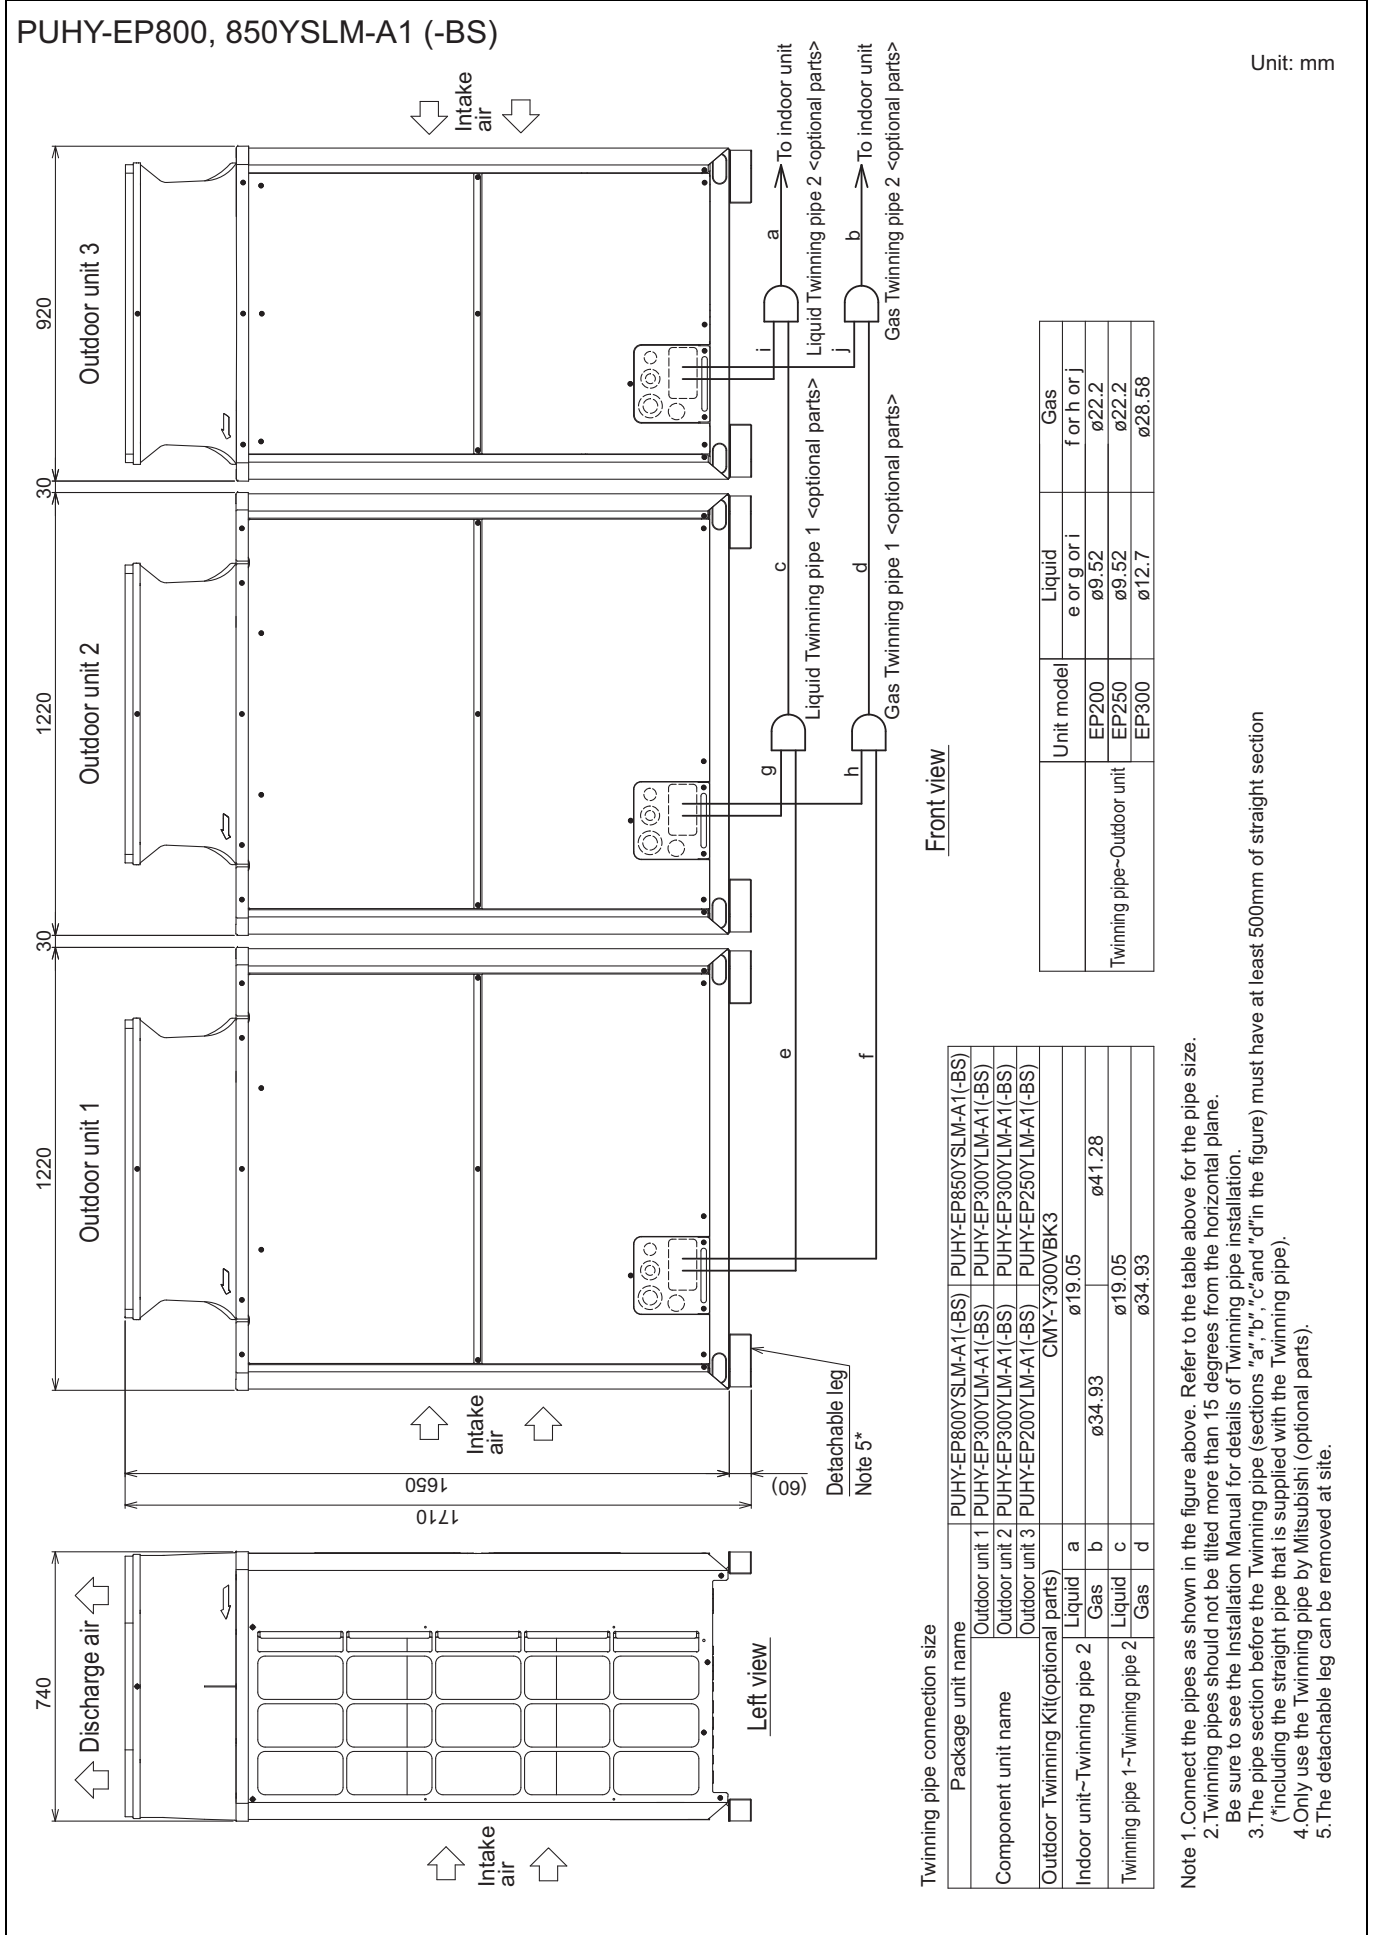

Y HIGH COP

PUHY-EP900, 950YSLM-A1 (-BS)

Unit: mm

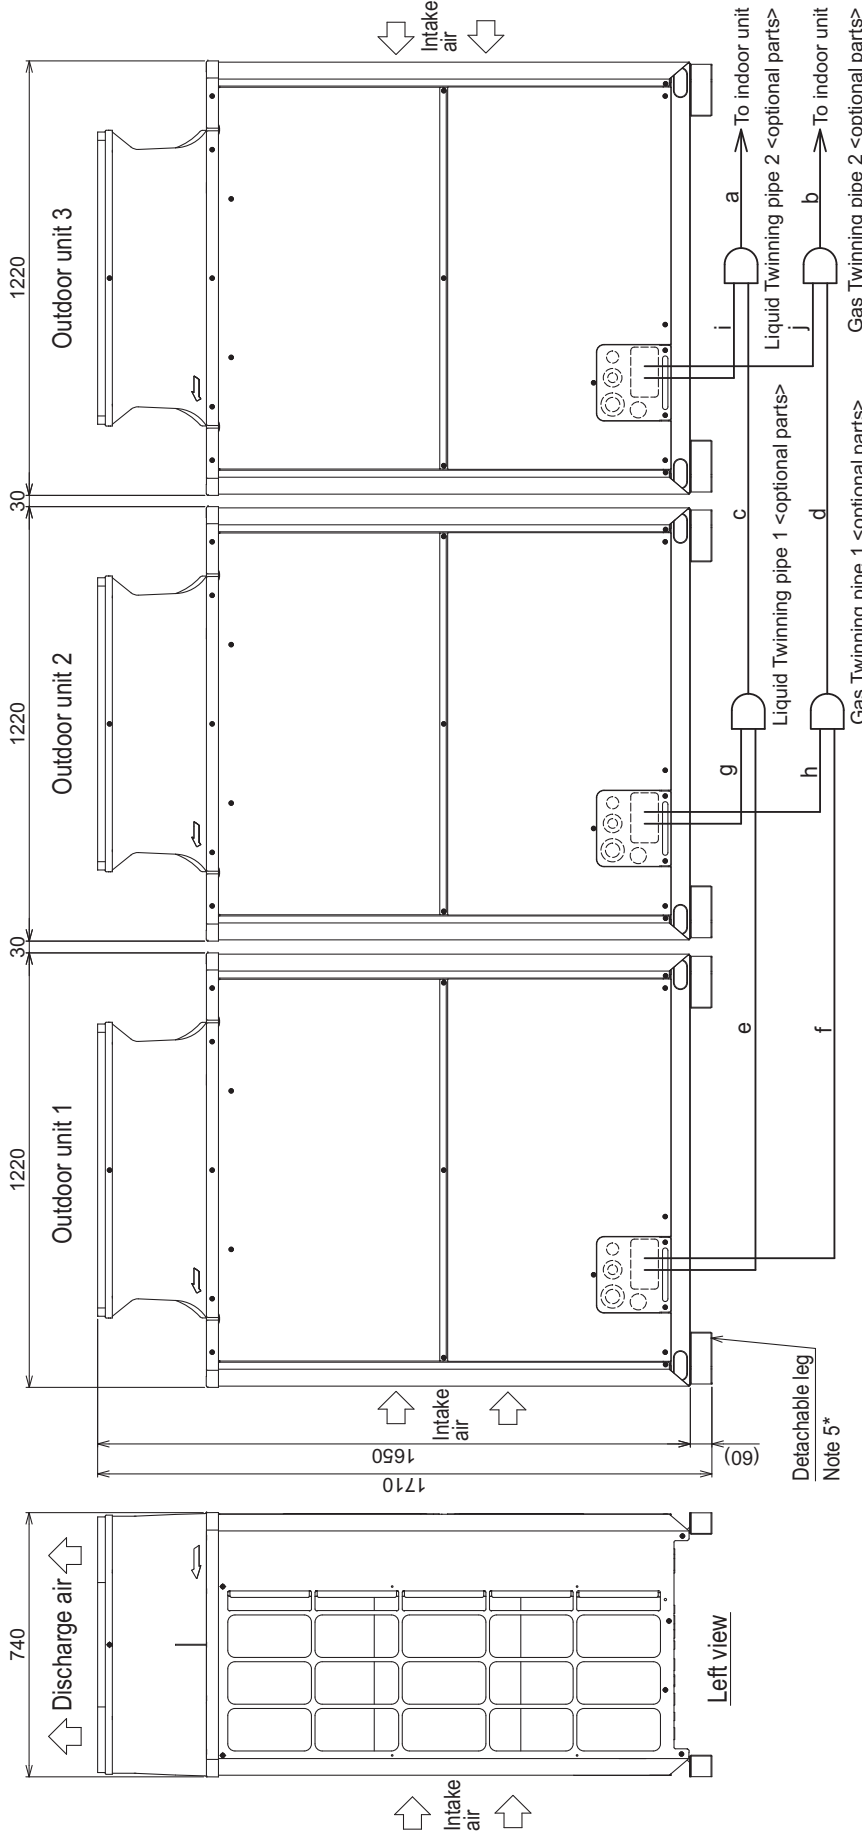


Front view

Twinning pipe connection size

Package unit name	PUHY-EP900YSLM-A1(-BS)	PUHY-EP950YSLM-A1(-BS)
Outdoor unit 1	PUHY-EP300YLM-A1(-BS)	PUHY-EP350YLM-A1(-BS)
Outdoor unit 2	PUHY-EP300YLM-A1(-BS)	PUHY-EP300YLM-A1(-BS)
Outdoor unit 3	PUHY-EP300YLM-A1(-BS)	PUHY-EP300YLM-A1(-BS)
Outdoor Twinning Kit(optional parts)	CMY-Y300VBK3	
Indoor unit~Twinning pipe 2	Liquid	ø19.05
	Gas	ø41.28
Twinning pipe 1~Twinning pipe 2	Liquid	ø19.05
	Gas	ø34.93

Twinning pipe-Outdoor unit	Unit model	Liquid e or g or i ø12.7	Gas f or h or j ø28.58
	EP300	ø12.7	ø28.58
	EP350	ø12.7	ø28.58


- Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.
- 2. Twinning pipes should not be tilted more than 15 degrees from the horizontal plane.
- 3. Be sure to see the Installation Manual for details of Twinning pipe installation.
- 3. The pipe section before the Twinning pipe (sections "a", "b", "c" and "d" in the figure) must have at least 500mm of straight section (*including the straight pipe that is supplied with the Twinning pipe).
- 4. Only use the Twinning pipe by Mitsubishi (optional parts).
- 5. The detachable leg can be removed at site.

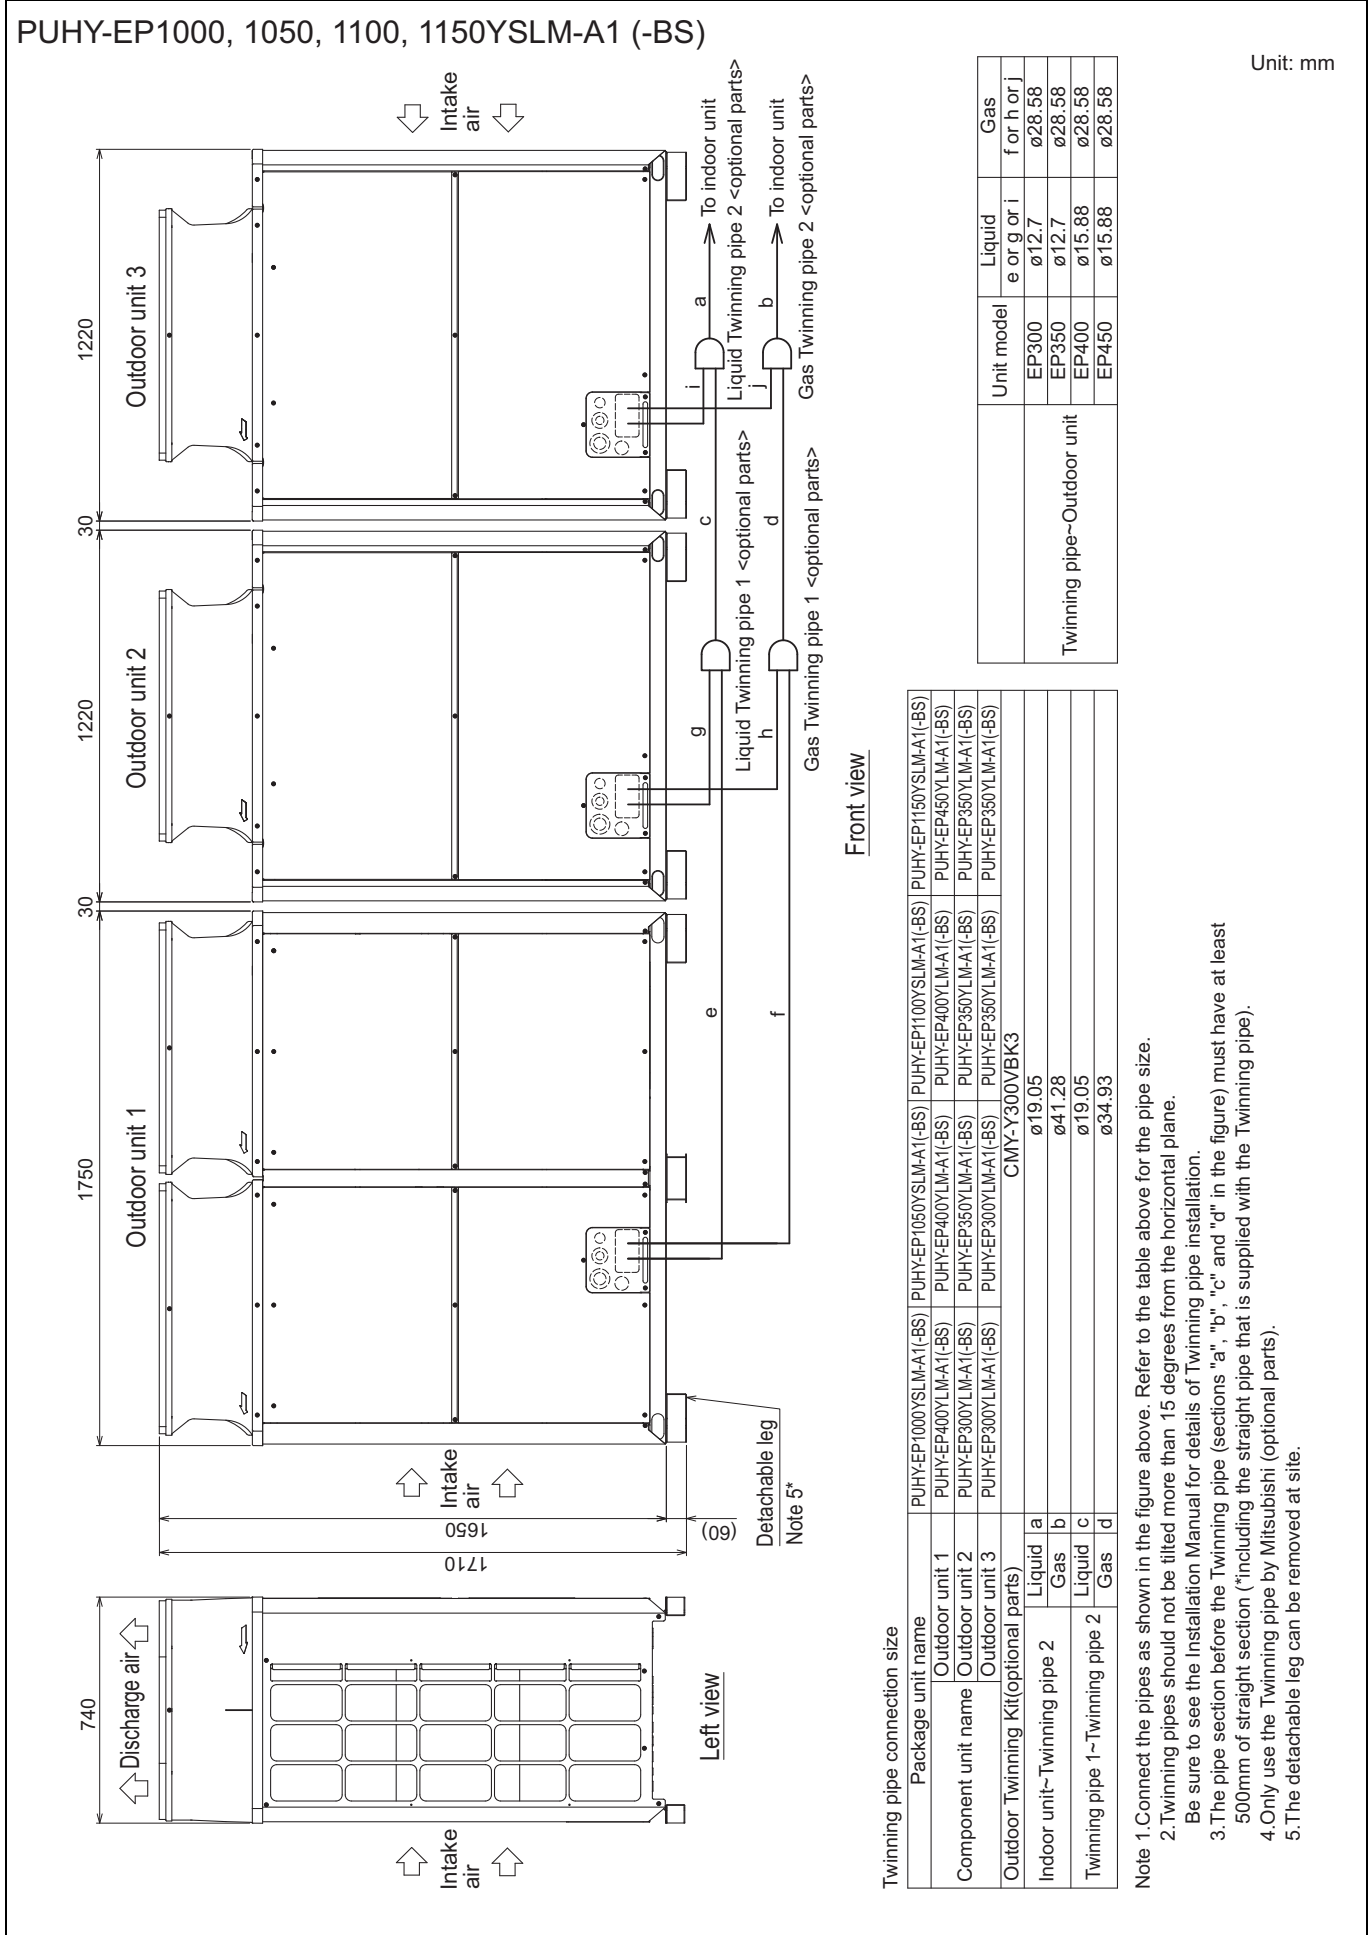

Y (HIGH COP)

PUHY-EP1200, 1250YSLM-A1 (-BS)

Unit: mm

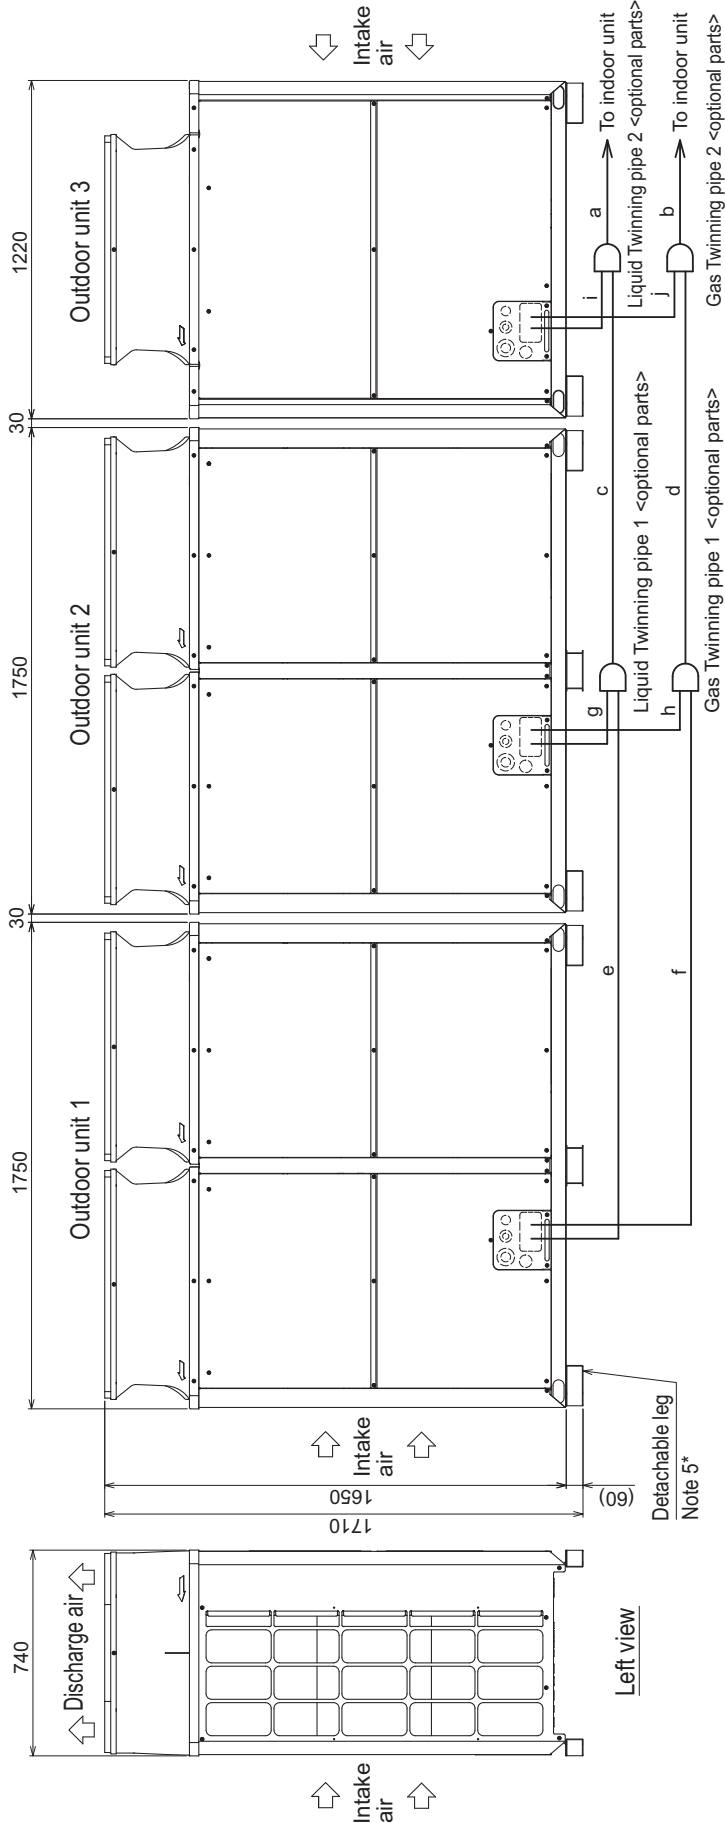

Front view


Left view

Twinning pipe connection size

Package unit name	PUHY-EP1200YSLM-A1(-BS)	PUHY-EP1250YSLM-A1(-BS)
Outdoor unit 1	PUHY-EP450YLM-A1(-BS)	PUHY-EP450YLM-A1(-BS)
Outdoor unit 2	PUHY-EP400YLM-A1(-BS)	PUHY-EP450YLM-A1(-BS)
Outdoor unit 3	PUHY-EP350YLM-A1(-BS)	PUHY-EP350YLM-A1(-BS)
Outdoor Twinning Kit(optional parts)	CMY-Y300VBK3	
Indoor unit~Twinning pipe 2	Liquid a	ø19.05
	Gas b	ø41.28
Twinning pipe 1~Twinning pipe 2	Liquid c	ø19.05
	Gas d	ø34.93


Unit model	Liquid e or g or i	Gas f or h or j
EP350	ø12.7	ø28.58
EP400	ø15.88	ø28.58
EP450	ø15.88	ø28.58

- Note 1. Connect the pipes as shown in the figure above. Refer to the table above for the pipe size.
 2. Twinning pipes should not be tilted more than 15 degrees from the horizontal plane.
 Be sure to see the Installation Manual for details of Twinning pipe installation.
 3. The pipe section before the Twinning pipe (sections "a", "b", "c" and "d" in the figure) must have at least 500mm of straight section (*including the straight pipe that is supplied with the Twinning pipe).
 4. Only use the Twinning pipe by Mitsubishi (optional parts).
 5. The detachable leg can be removed at site.

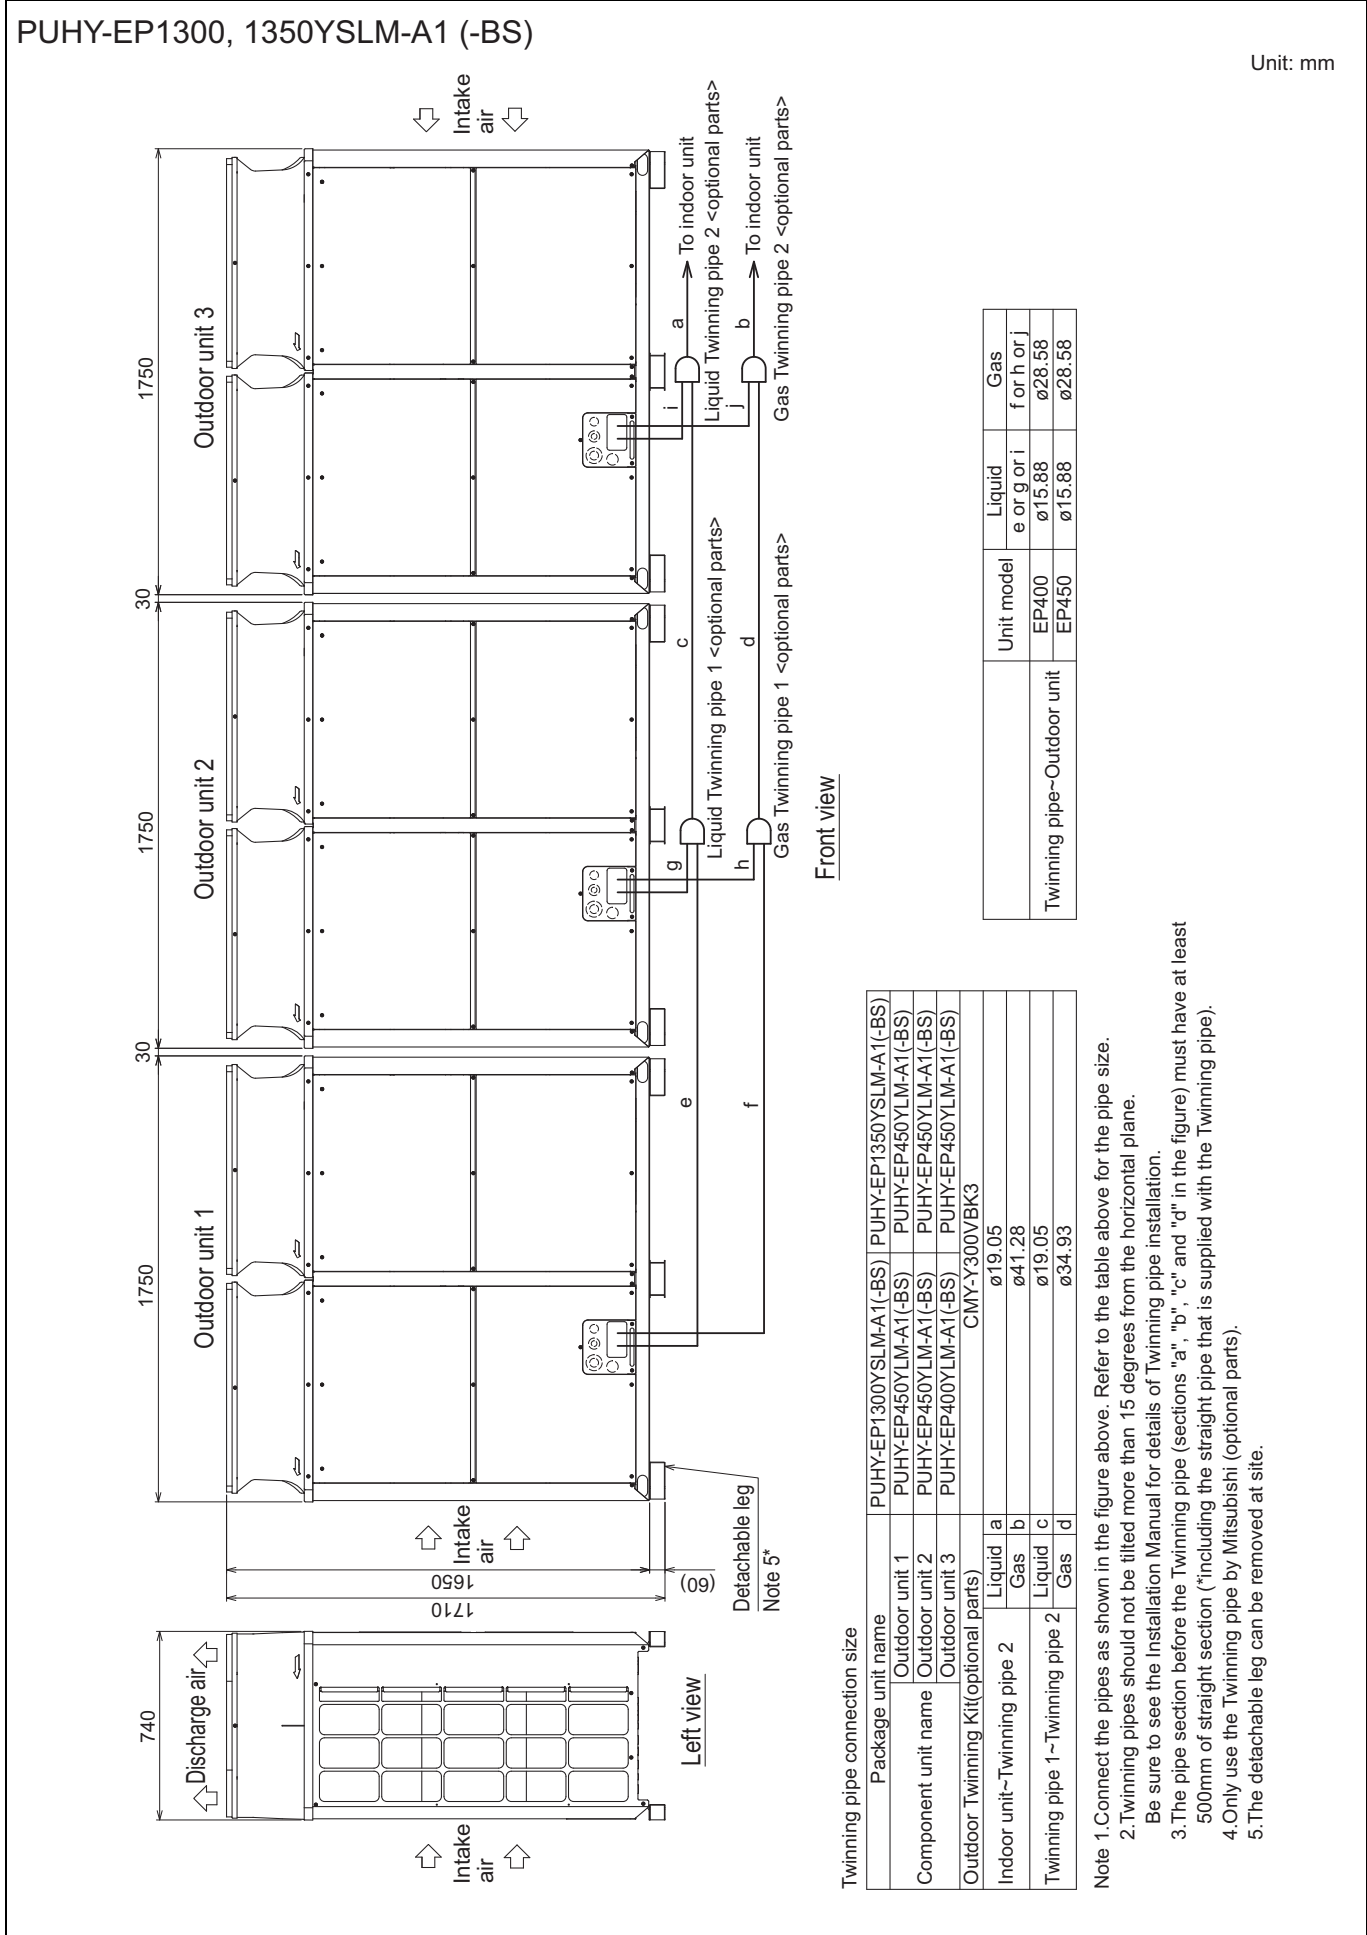

Y (HIGH COP)


PUHY-EP200, 250YLM-A1 (-BS)

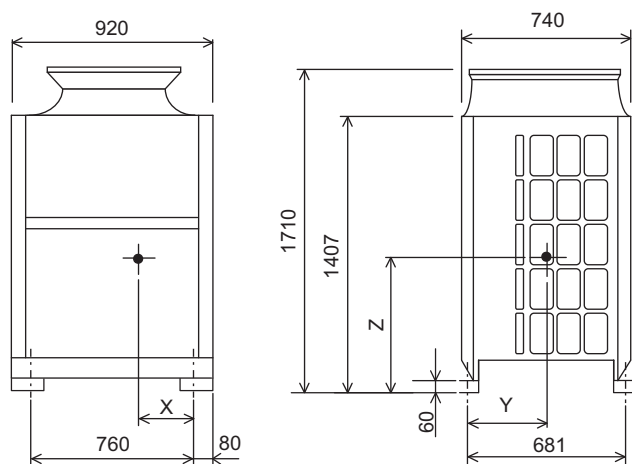

Unit : mm

Model	X	Y	Z
PUHY-EP200YLM-A1(-BS)	343	307	707
PUHY-EP250YLM-A1(-BS)	343	307	707


PUHY-EP300, 350YLM-A1 (-BS)

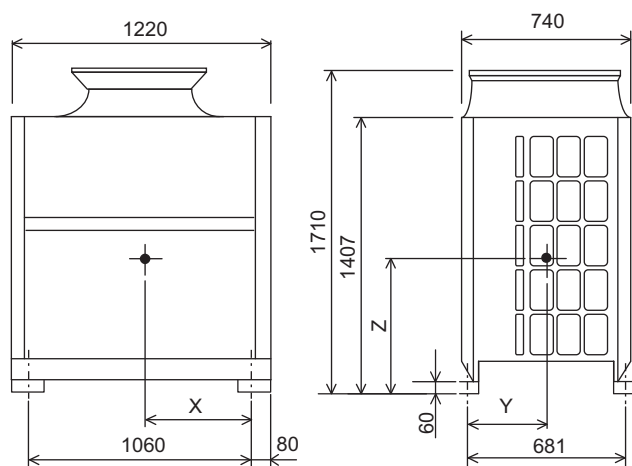

Unit : mm

Model	X	Y	Z
PUHY-EP300YLM-A1(-BS)	452	313	671
PUHY-EP350YLM-A1(-BS)	451	308	655


PUHY-EP400, 450, 500YLM-A1 (-BS)

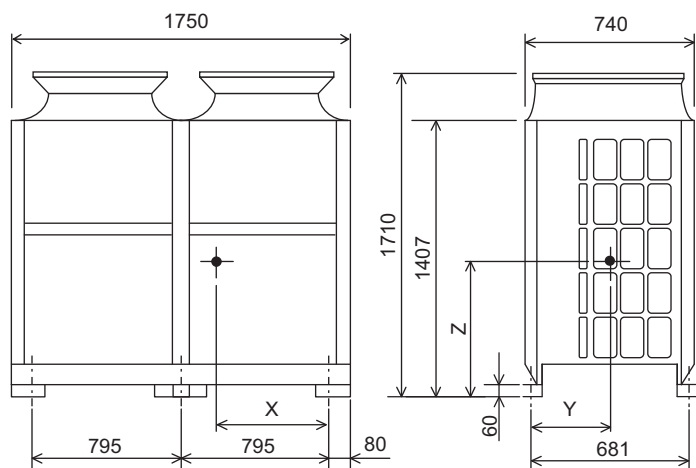

Unit : mm

Model	X	Y	Z
PUHY-EP400YLM-A1(-BS)	701	323	705
PUHY-EP450YLM-A1(-BS)	701	323	705
PUHY-EP500YLM-A1(-BS)	717	321	737

PUHY-EP200, 250, 300, 350YLM-A1 (-BS)

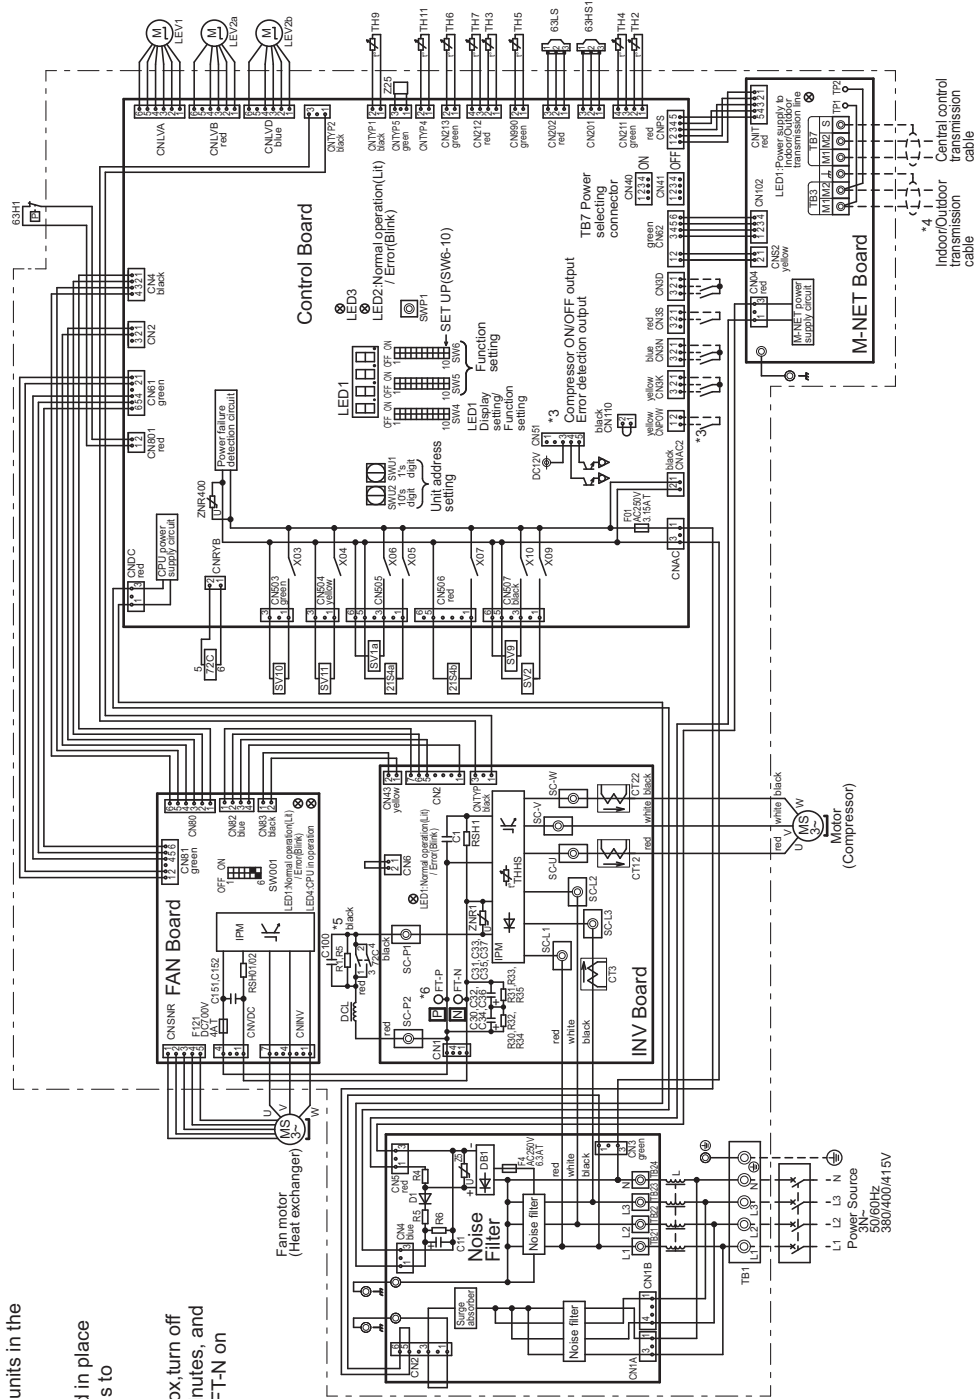

- *1. Single-dotted lines indicate wiring not supplied with the unit.
- *2. Dot-dash lines indicate the control box boundaries.
- *3. Refer to the Data book for connecting input/output signal connectors.
- *4. Daisy-chain terminals (TB3) on the outdoor units in the same refrigerant system together.
- *5. Faston terminals have a locking function. Make sure the terminals are securely locked in place after insertion. Press the tab on the terminals to removed them.
- *6. Control box houses high-voltage parts. Before inspecting the inside of the control box, turn off the power, keep the unit off for at least 10 minutes, and confirm that the voltage between FT-P and FT-N on INV Board has dropped to DC20V or less.


<Symbol explanation>

Symbol	Explanation
Z1S3a	4-way valve
Z1S3b	Cooling/Heating switching
63HT	Heat exchanger capacity control
63HS1	High pressure protection for the discharge pressure
63LS	Discharge pressure
ZC	Low pressure
C30-C37	Magnetic relay (inverter main circuit)
C12, C72, C73	Capacitor (inverter main circuit)
DCL	Current sensor (AC)
L	DC reactor
LEV1	Choke coil (for high frequency noise reduction)
LEV2a,b	Linear expansion valve
RT4.5	HIC bypass; Controls refrigerant flow in HIC circuit.
RS101/02/RS11	Pressure control/Refrigerant flow rate sensor
SV1a	Resistor
SV2	For brush current prevention
SV9	Solenoid valve
SV10, SV11	For opening/closing the bypass circuit
TB1	For opening/closing the bypass circuit
TB3	Terminal block
TB7	Indoor/Outdoor transmission cable
TB2	Central control transmission cable
TH2	Sub-cool bypass outlet temperature
TH3	Pipe temperature
TH4	Discharge pipe temperature
TH5	ACC inlet pipe temperature
TH6	Sub-cooled liquid refrigerant temperature
TH7	OA temperature
TH9, TH11	Heat exchanger outlet pipe temperature
THHS	IPM temperature
ZZ5	Function setting connector

Y HIGH COP

PUHY-EP400, 450YLM-A1 (-BS)

Y (HIGH COP)

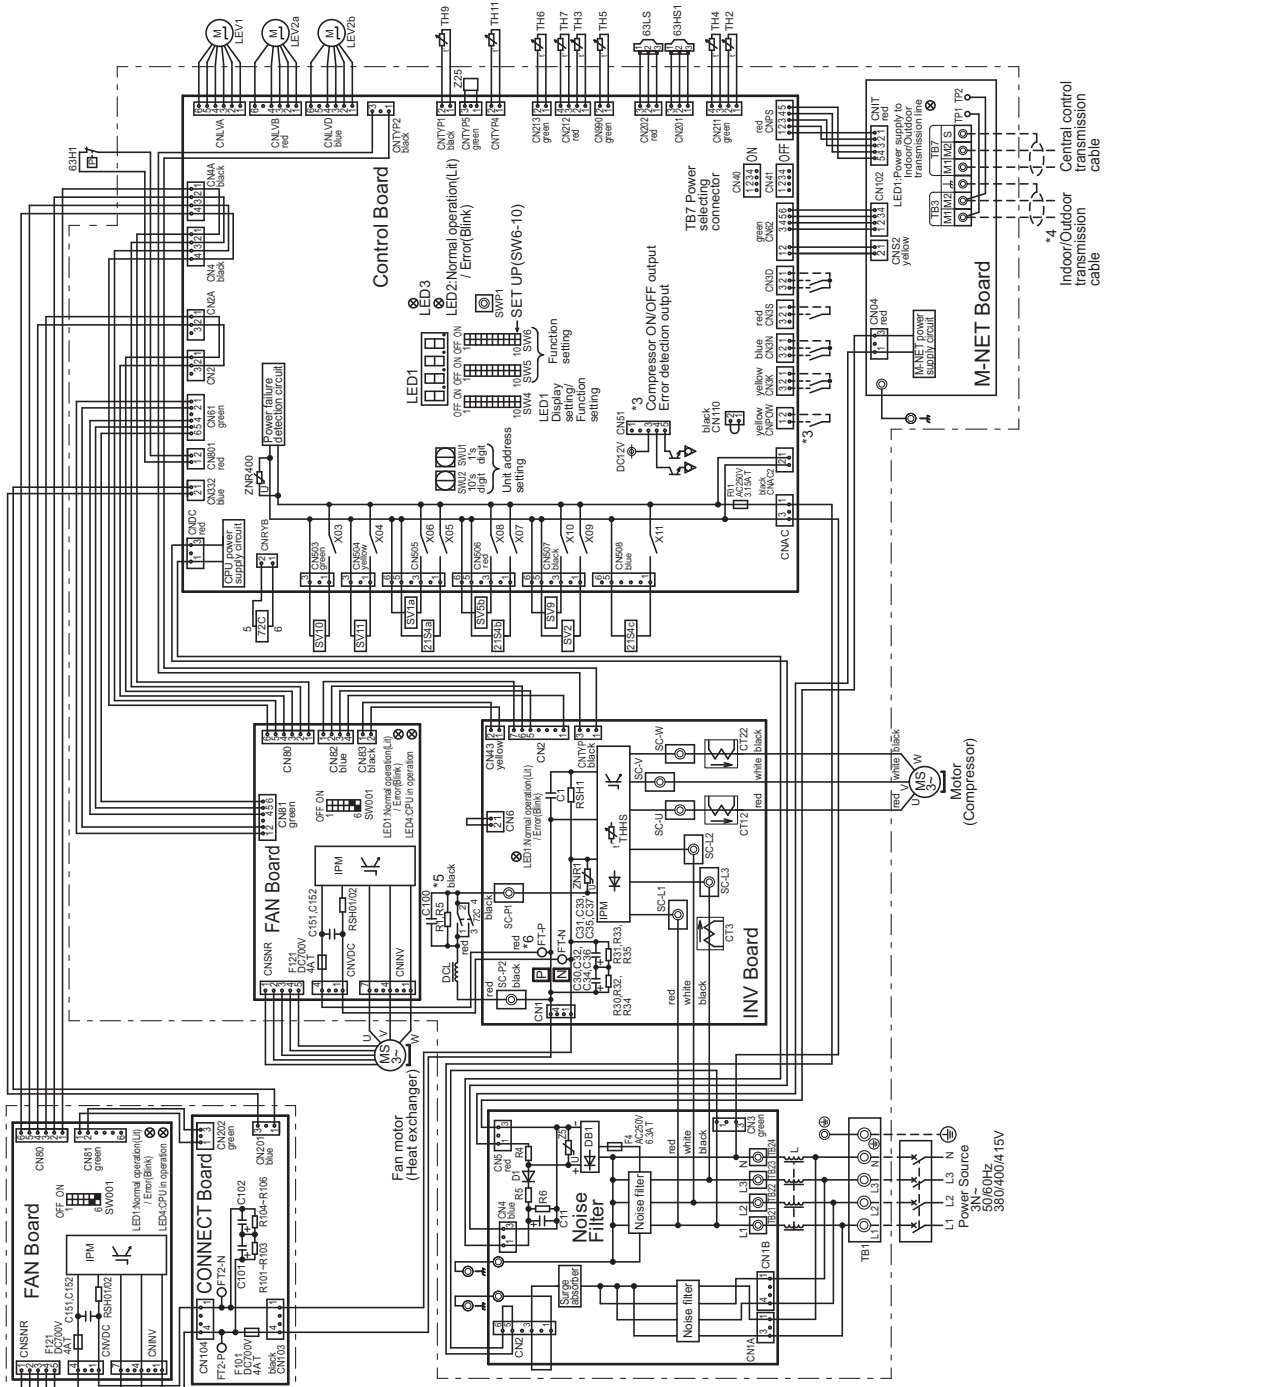


- *1. Single-dotted lines indicate wiring not supplied with the unit.
- *2. Dot-dash lines indicate the control box boundaries.
- *3. Refer to the Data book for connecting input/output signal connectors.
- *4. Daisy-chain terminals (TB3) on the outdoor units in the same refrigerant system together.
- *5. Faston terminals have a locking function. Make sure the terminals are securely locked in place after insertion. Press the tab on the terminals to removed them.
- *6. Control box houses high-voltage parts. Before inspecting the inside of the control box, turn off the power, keep the unit off for at least 10 minutes, and confirm that the voltage between FT-P and FT-N on INV Board has dropped to DC20V or less.

<Symbol explanation>

Symbol	Explanation
21SA/a	4-way valve
21SA/b,c	Cooling/Heating switching
63H1	Heat exchanger capacity control outdoor unit
63HS1	Pressure switch
63LS	Discharge pressure sensor
Z3P-C37	Low pressure magnetic relay (inverter main circuit)
CT1,CT2,CT3	Current sensor (AC)
DCL	DC reactor
L	Choke coil (for high frequency noise reduction)
LEV1	Linear expansion valve
LEV2a,b	HIC bypass Controls refrigerant flow in HIC circuit
RT1,5	Pressure control/Refrigerant flow rate control
RS11/2/RS11	For inrush current prevention
SV1a	For current detection
SV2	For opening/closing the bypass circuit under the O/S
SV5b	For opening/closing the discharge circuit bypass
SV9	For opening/closing the discharge circuit capacity control
SV10,SV11	For opening/closing the bypass circuit
TB1	Terminal
TB3	Indoor/Outdoor transmission cable
TB7	Central control transmission cable
TH2	Subcool bypass outlet temperature
TH3	Pipe temperature
TH4	Discharge pipe temperature
TH5	ACC inlet pipe temperature
TH6	Subcooled liquid refrigerant temperature
TH7	OA temperature
TH9,TH11	Heat exchanger outlet pipe temperature
THHS	OA temperature
Z25	IPM temperature
	Function setting connector







PUHY-EP500YLM-A1 (-BS)

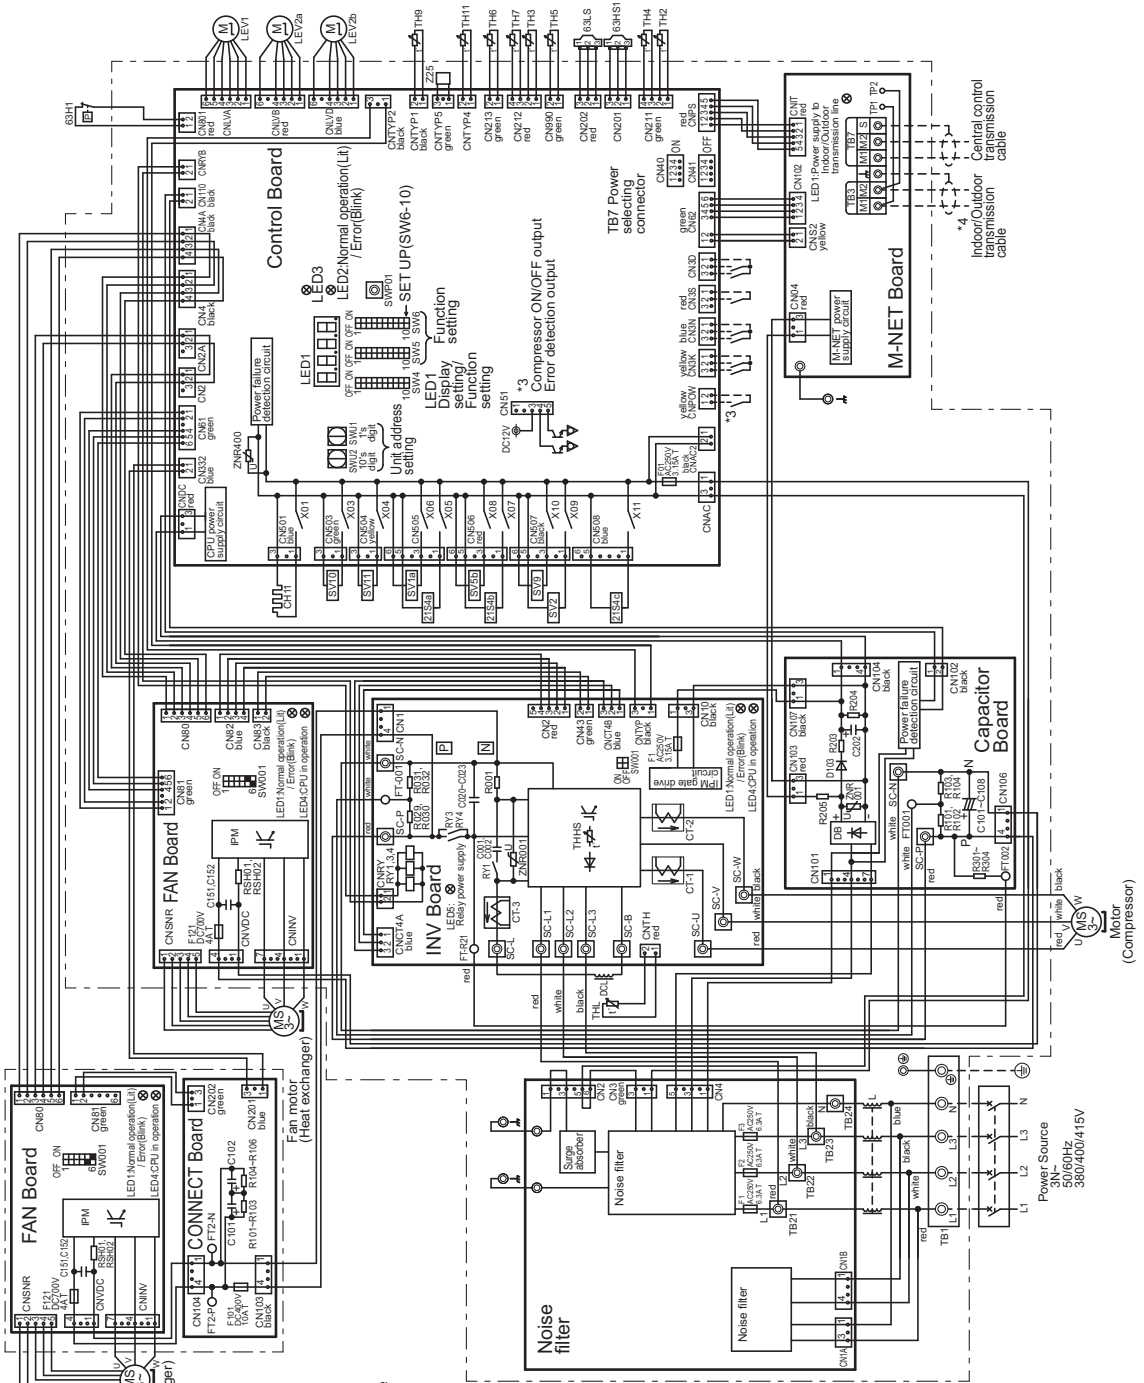

- *1. Single-dotted lines indicate wiring not supplied with the unit.
- *2. Dot-dash lines indicate the control box boundaries.
- *3. Refer to the Data book for connecting input/output signal connectors.
- *4. Daisy-chain terminals (TB3) on the outdoor units in the same refrigerant system together.
- *5. Faston terminals have a locking function. Make sure the terminals are securely locked in place after insertion. Press the tab on the terminals to removed them.
- *6. Control box houses high-voltage parts. Before inspecting the inside of the control box, turn off the power, keep the unit off for at least 10 minutes, and confirm that the voltage between SC-P and SC-N on Capacitor Board has dropped to DC20V or less.


<Symbol explanation>

Symbol	Explanation
2T54a	4-way valve
2T54b.c	Cooling/Heating switching
63H1	Heat exchanger capacity control
	Pressure switch
	High exchanger protection for the outdoor unit
63HS1	Pressure sensor
63LS	Low pressure
RY1	Magnetic filter circuit
RV3-RV4	Inverter main circuit
C001-C108	Capacitor
C1-C12	Inverter filter circuit
CH1	DC
DCL	Crankcase heater (for heating the compressor)
L	DC reactor
LEV1	Linear HIC bypass Controls refrigerant expansion flow in HIC circuit
LEV2a.b	Pressure control, Refrigerant flow rate control
R30T-R304	For inrush current prevention
RS10T,RS10Z	Resistor
SV1a	Solenoid valve
SV2	For opening/closing the bypass circuit under the DIS suction valve
SV5b	For opening/closing the discharge capacity control
SV9	For opening/closing the bypass circuit
SV10,SV11	For opening/closing the defrost circuit
TB1	Terminal block
TB3	Indoor/Outdoor transmission cable
TB7	Central control transmission cable
TH2	Thermistor
TH3	Subcool bypass outlet temperature
TH4	Pipe temperature
TH5	Discharge pipe temperature
TH6	ACC Inlet pipe temperature
	Subcooled liquid refrigerant temperature
TH7	Oil temperature
TH9,TH11	Heat exchanger outlet pipe temperature
TH5	IPM temperature
THL	IPM temperature
ZZ5	Function sealing connector

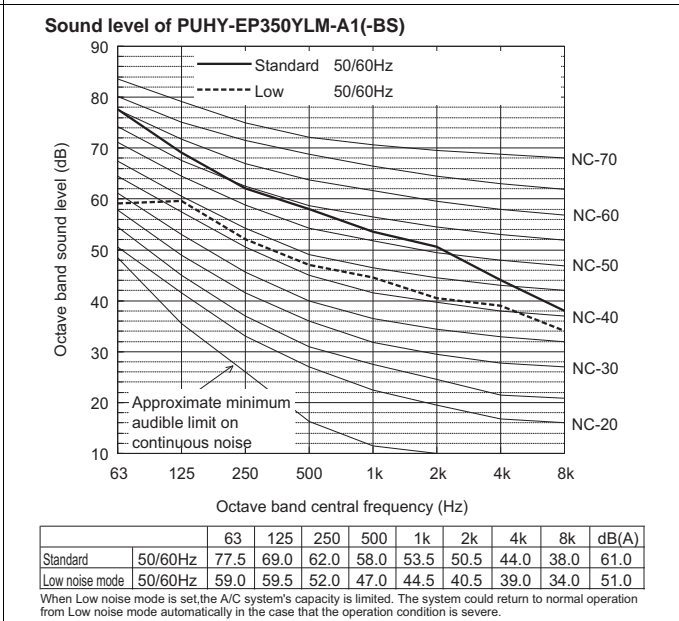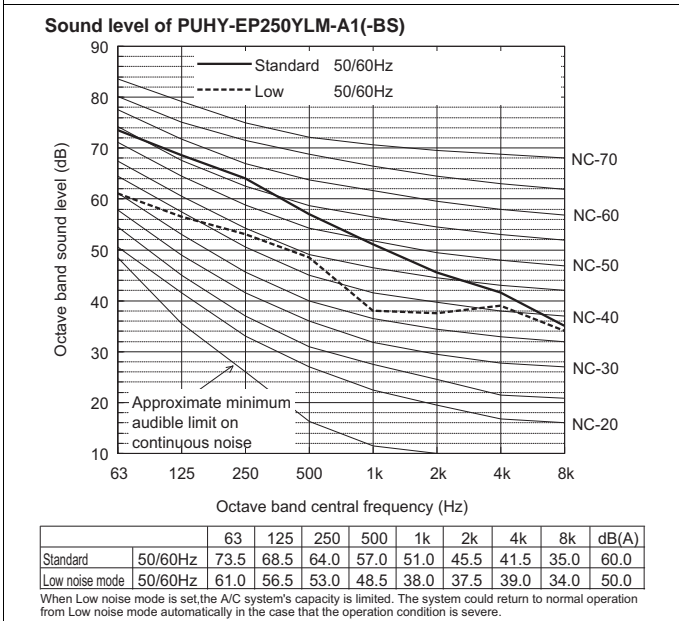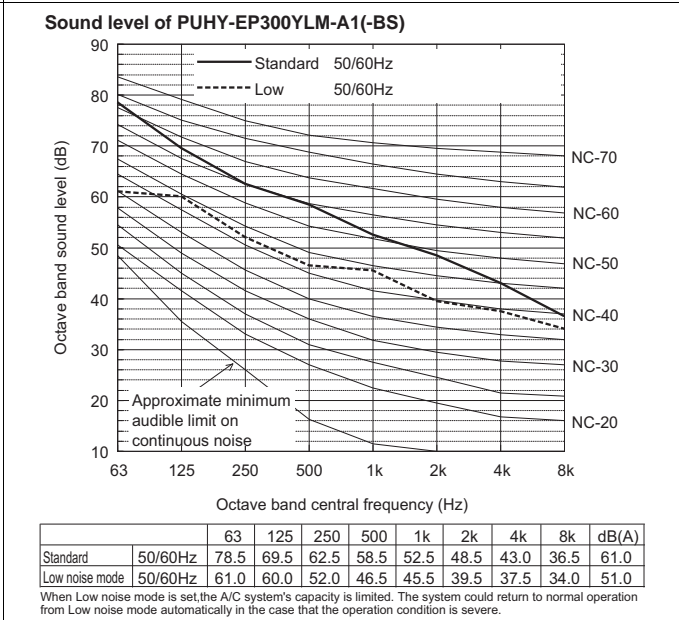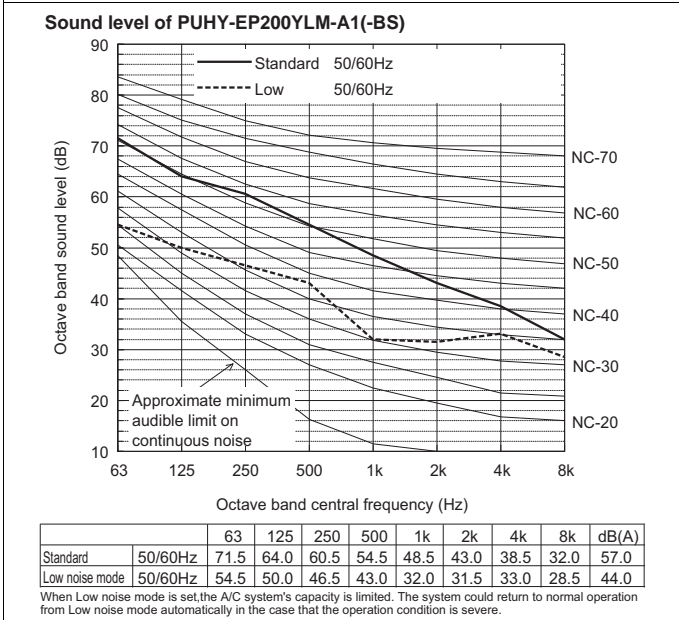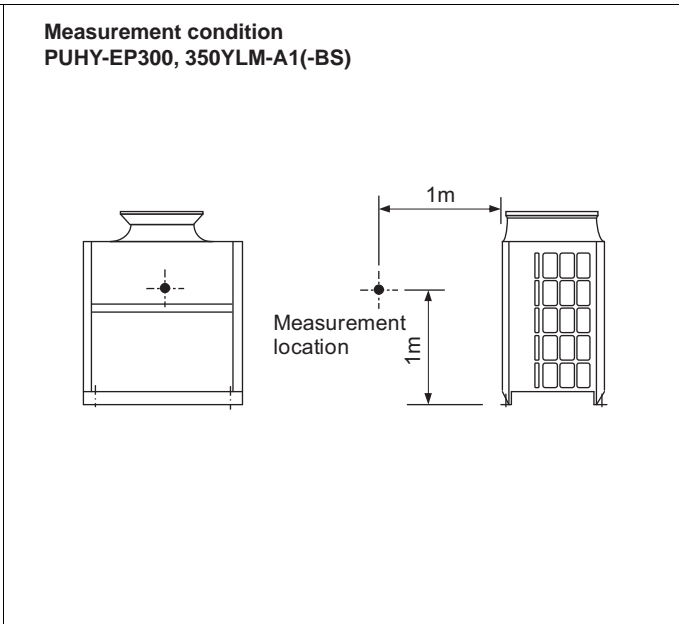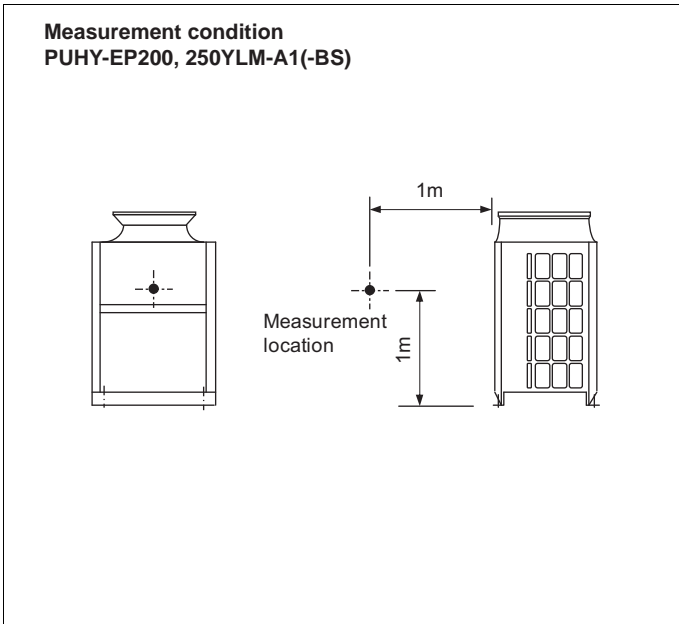


♦ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

Measurement condition
PUHY-EP400, 450, 500YLM-A1(-BS)

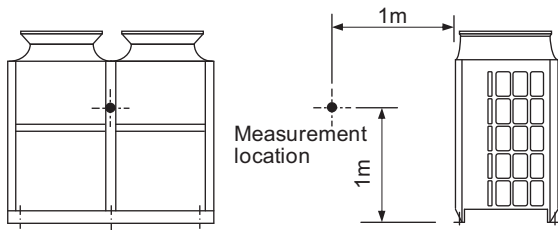


Sound level of PUHY-EP500YLM-A1(-BS)

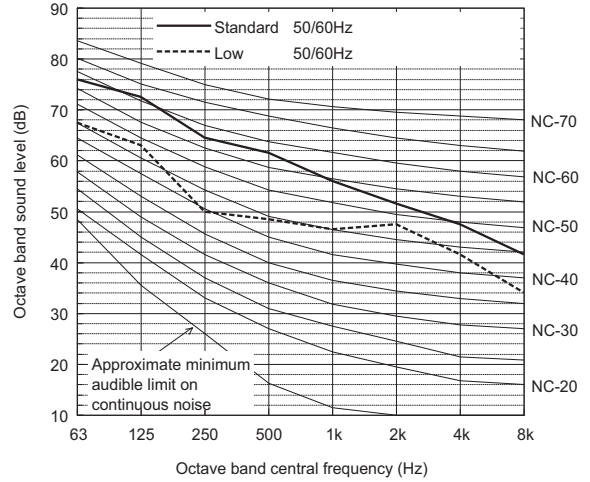

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	76.0	72.5	64.5	61.5	56.0	51.5	47.5	41.5	63.5
Low noise mode	50/60Hz	67.5	63.0	50.0	48.5	46.5	47.5	41.5	34.0	54.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-EP400YLM-A1(-BS)

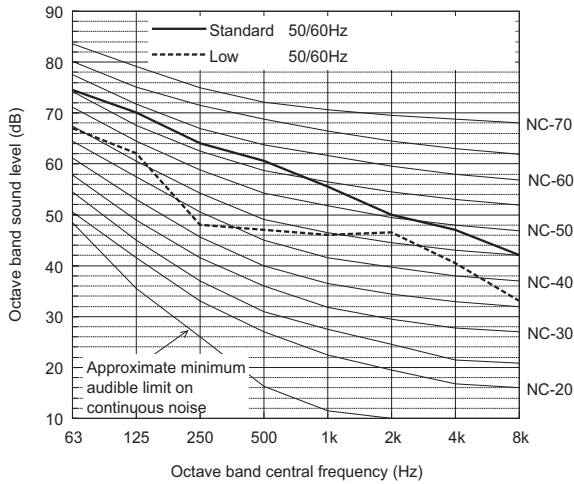

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	74.5	70.0	64.0	60.5	55.5	50.0	47.0	42.0	62.5
Low noise mode	50/60Hz	67.0	62.0	48.0	47.0	46.0	46.5	40.5	33.0	53.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-EP450YLM-A1(-BS)

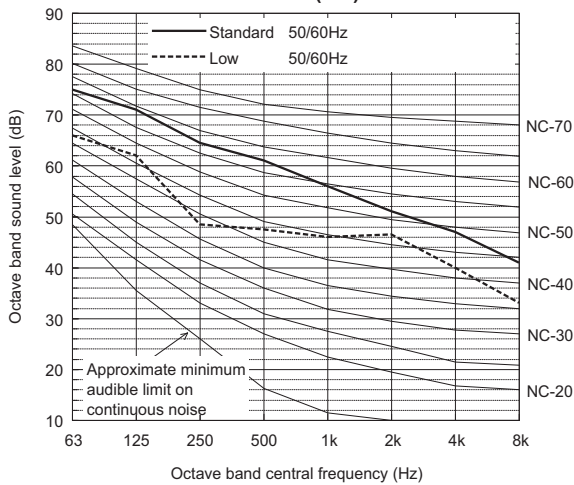


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	75.0	71.0	64.5	61.0	56.0	51.0	47.0	41.0	63.0
Low noise mode	50/60Hz	66.0	62.0	48.5	47.5	46.0	46.5	40.0	33.0	53.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

◆ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.


Measurement condition
PUHY-EP550YSLM-A1(-BS)

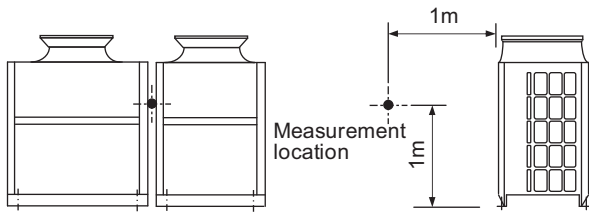

Measurement condition
PUHY-EP600YSLM-A1(-BS)

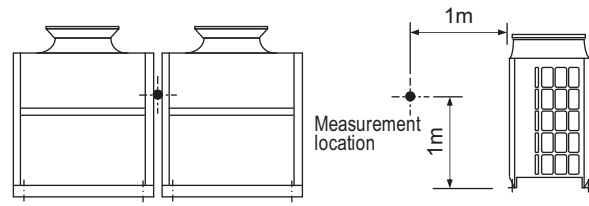


Sound level of PUHY-EP550YSLM-A1(-BS)

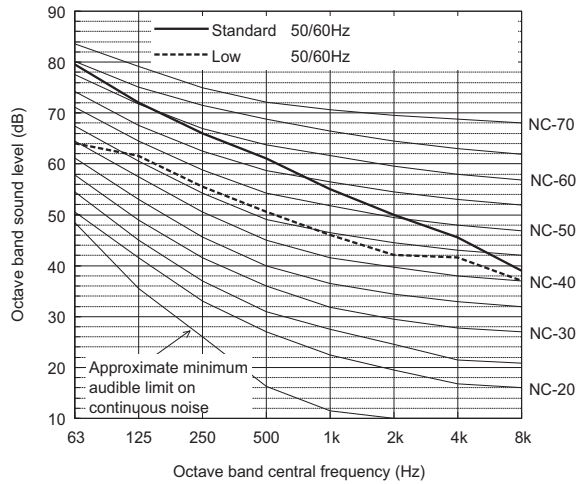

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	79.5	72.0	66.0	61.0	55.0	50.0	45.5	39.0	63.5
Low noise mode	50/60Hz	64.0	61.5	55.5	50.5	46.0	42.0	41.5	37.0	53.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-EP600YSLM-A1(-BS)

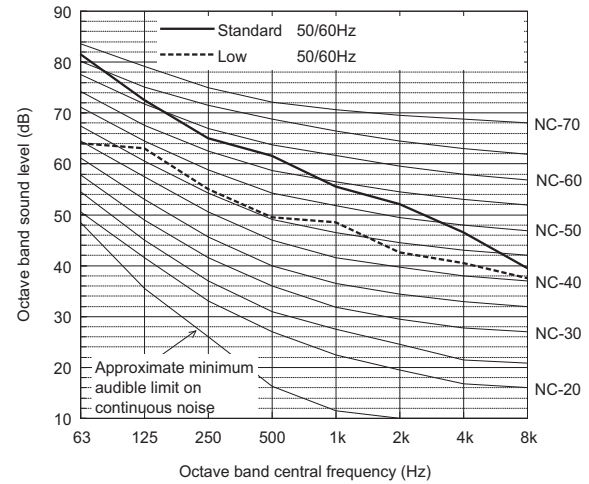


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	81.5	72.5	65.0	61.5	55.5	52.0	46.5	39.5	64.0
Low noise mode	50/60Hz	64.0	63.0	55.0	49.5	48.5	42.5	40.5	37.5	54.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

♦ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.


Measurement condition
PUHY-EP650YSLM-A1(-BS)

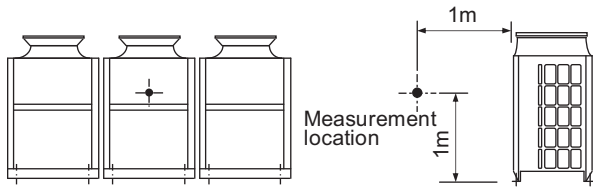

Measurement condition
PUHY-EP700, 750YSLM-A1(-BS)

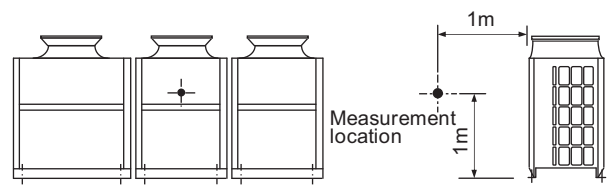


Sound level of PUHY-EP650YSLM-A1(-BS)

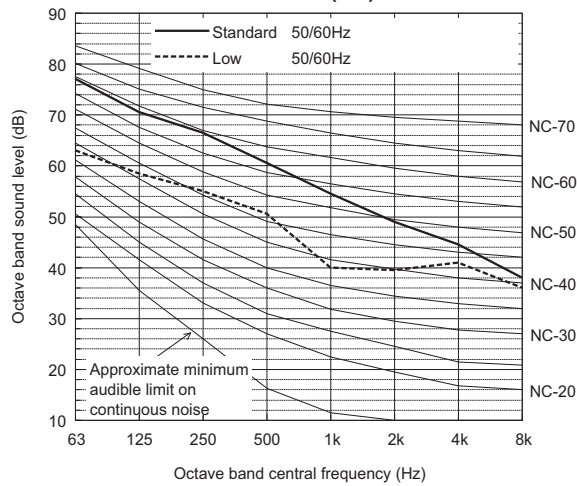

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	77.0	70.5	66.5	60.5	54.5	49.0	44.5	38.0	63.0
Low noise mode	50/60Hz	63.0	58.5	55.0	50.5	40.0	39.5	41.0	36.0	52.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-EP700YSLM-A1(-BS)

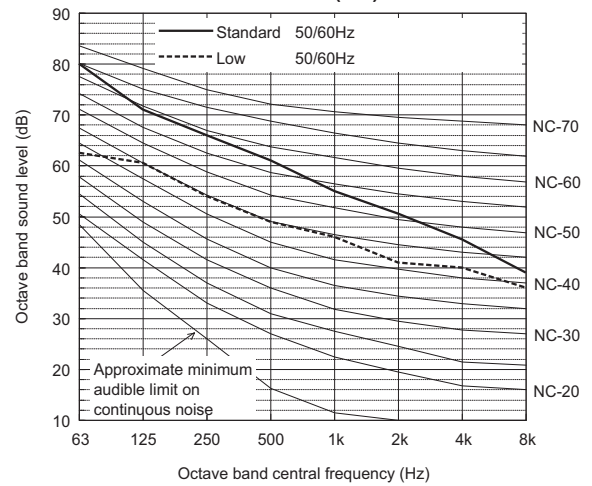

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	80.0	71.0	66.0	61.0	55.0	50.5	45.5	39.0	63.5
Low noise mode	50/60Hz	62.5	60.5	54.0	49.0	46.0	41.0	40.0	36.0	52.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-EP750YSLM-A1(-BS)

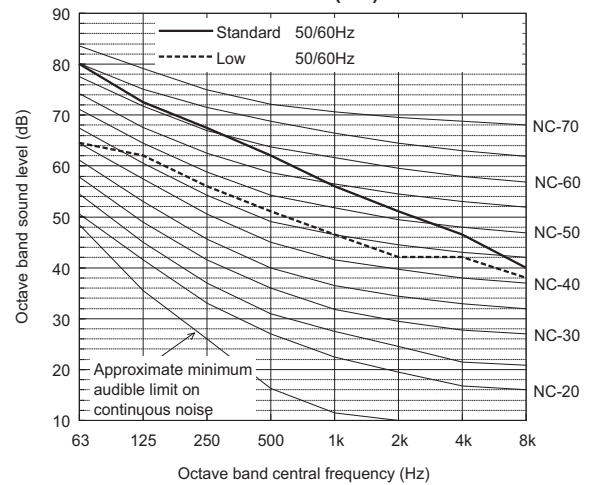


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	80.0	72.5	67.5	62.0	56.0	51.0	46.5	40.0	64.5
Low noise mode	50/60Hz	64.5	62.0	56.0	51.0	46.5	42.0	42.0	38.0	54.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

◆ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.


**Measurement condition
PUHY-EP800, 850YSLM-A1(-BS)**

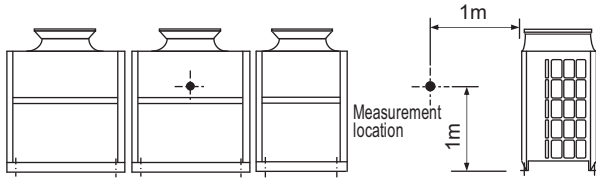

**Measurement condition
PUHY-EP900, 950YSLM-A1(-BS)**

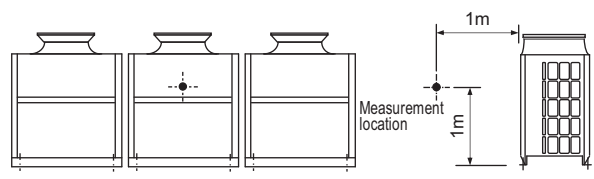


Sound level of PUHY-EP800YSLM-A1(-BS)

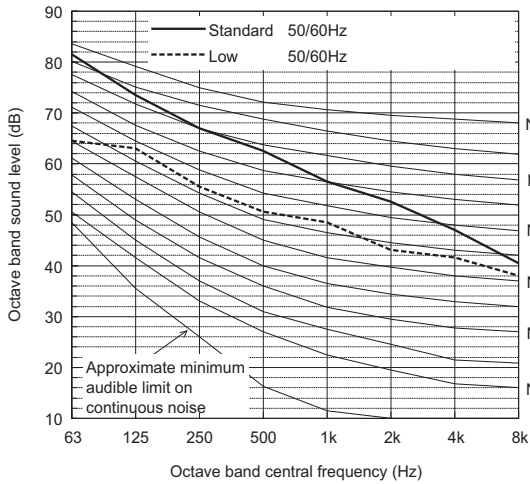

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	81.5	73.5	67.0	62.5	56.5	52.5	47.0	40.5	65.0
Low noise mode	50/60Hz	64.5	63.0	55.5	50.5	48.5	43.0	41.5	38.0	54.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-EP900YSLM-A1(-BS)

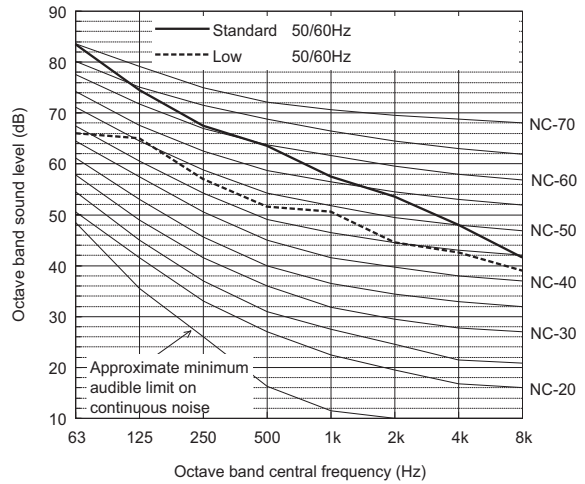

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	83.5	74.5	67.5	63.5	57.5	53.5	48.0	41.5	66.0
Low noise mode	50/60Hz	66.0	65.0	57.0	51.5	50.5	44.5	42.5	39.0	56.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-EP850YSLM-A1(-BS)

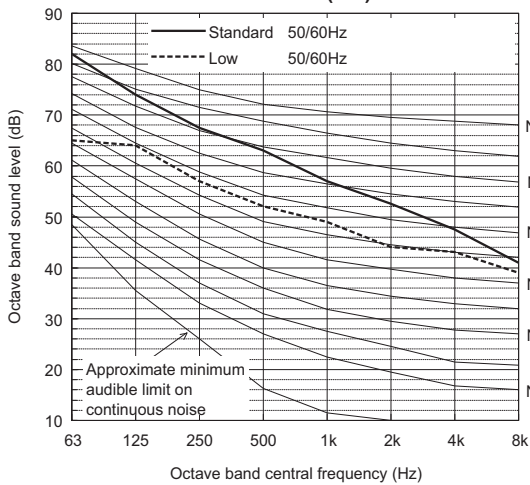

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	82.0	74.0	67.5	63.0	57.0	52.5	47.5	41.0	65.5
Low noise mode	50/60Hz	65.0	64.0	57.0	52.0	49.0	44.0	43.0	39.0	55.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-EP950YSLM-A1(-BS)

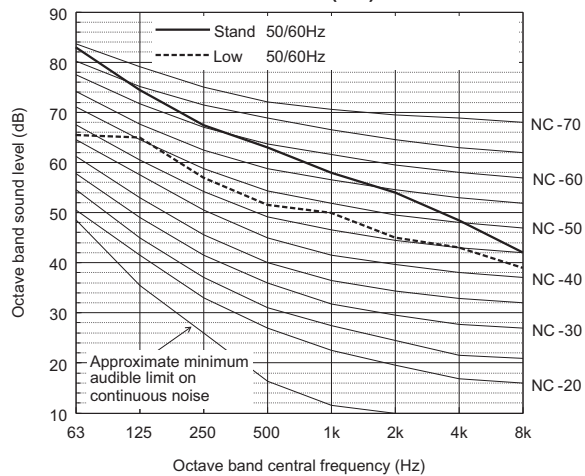


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	83.0	74.5	67.5	63.0	58.0	54.0	48.5	42.0	66.0
Low noise mode	50/60Hz	65.5	65.0	57.0	51.5	50.0	45.0	43.0	39.0	56.0


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

♦ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

Measurement condition
PUHY-EP1000, 1050, 1100, 1150YSLM-A1(-BS)

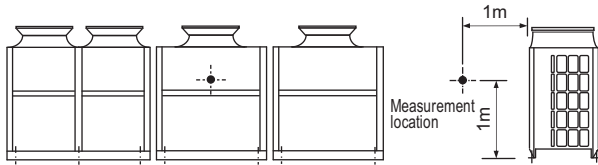


Sound level of PUHY-EP1100YSLM-A1(-BS)

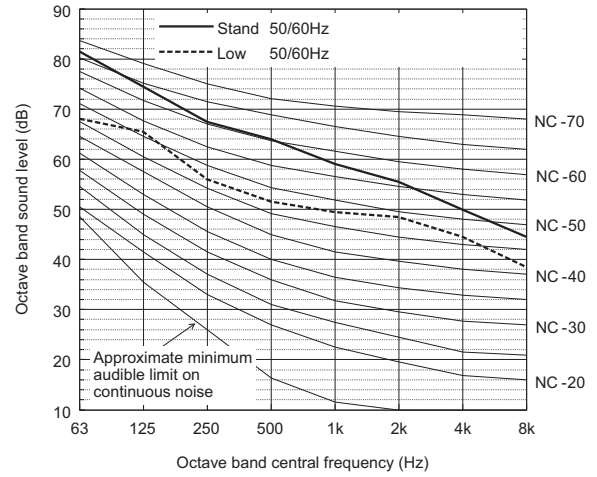

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	81.5	74.5	67.5	64.0	59.0	55.5	50.0	44.5	66.5
Low noise mode	50/60Hz	68.0	65.5	56.0	51.5	49.5	48.5	44.5	38.5	56.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-EP1000YSLM-A1(-BS)

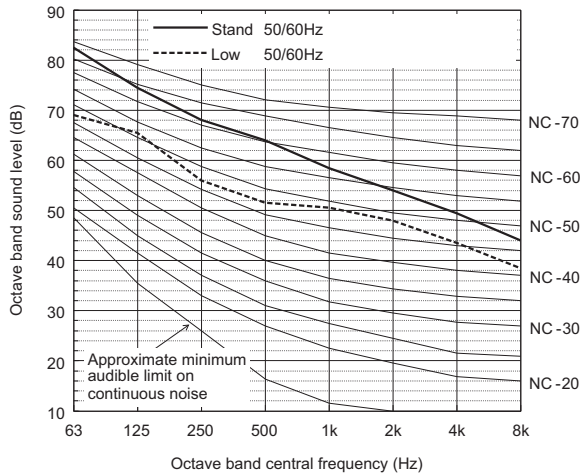

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	82.5	74.5	68.0	64.0	58.5	54.0	49.5	44.0	66.5
Low noise mode	50/60Hz	69.0	65.5	56.0	51.5	50.5	48.0	43.5	38.5	56.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-EP1150YSLM-A1(-BS)

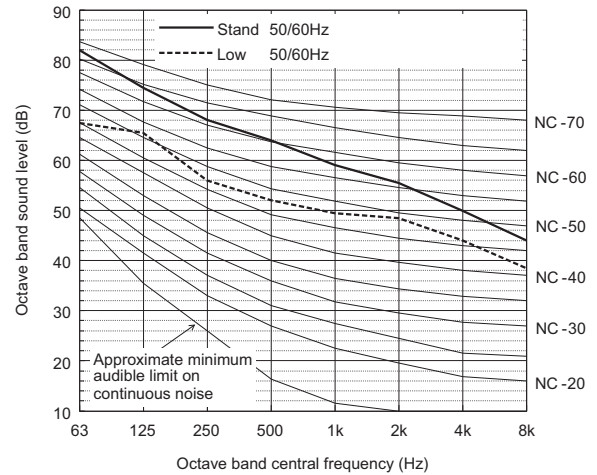

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	82.0	74.5	68.0	64.0	59.0	55.5	50.0	44.0	66.5
Low noise mode	50/60Hz	67.5	65.5	56.0	52.0	49.5	48.5	44.0	38.5	56.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-EP1050YSLM-A1(-BS)

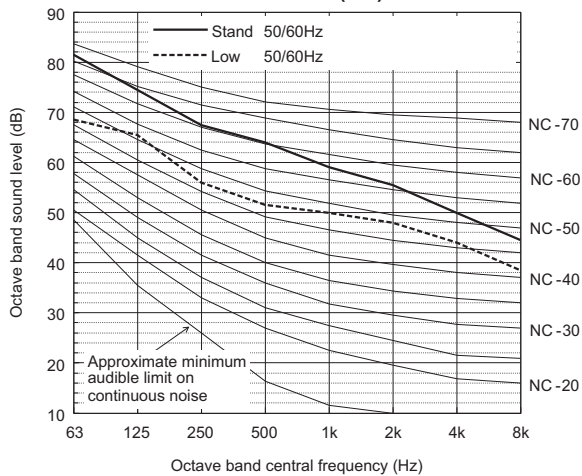


		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	81.5	74.5	67.5	64.0	59.0	55.5	50.0	44.5	66.5
Low noise mode	50/60Hz	68.5	65.5	56.0	51.5	50.0	48.0	44.0	38.5	56.5


When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

• Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.


Measurement condition
PUHY-EP1200, 1250YSLM-A1(-BS)

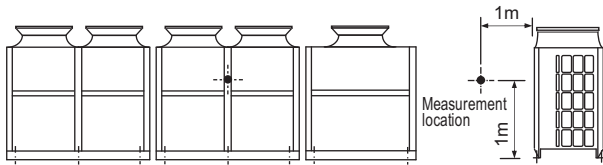

Measurement condition
PUHY-EP1300, 1350YSLM-A1(-BS)

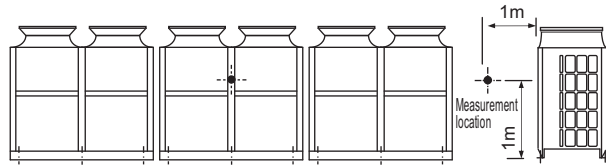


Sound level of PUHY-EP1200YSLM-A1(-BS)

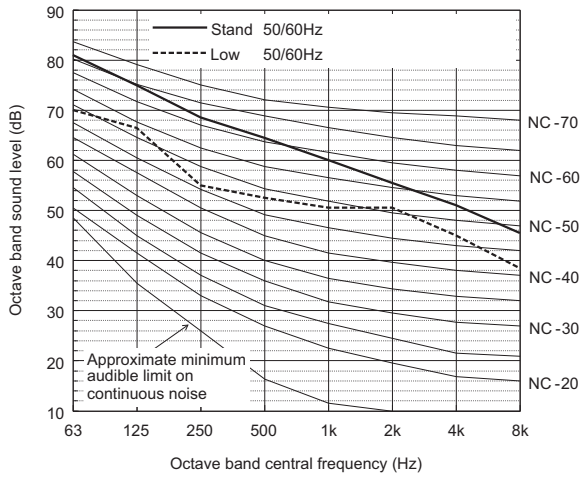

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	81.0	75.5	68.5	64.5	60.0	55.5	51.0	45.5	67.0
Low noise mode	50/60Hz	70.0	66.5	55.0	52.5	50.5	50.5	45.0	38.5	57.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-EP1300YSLM-A1(-BS)

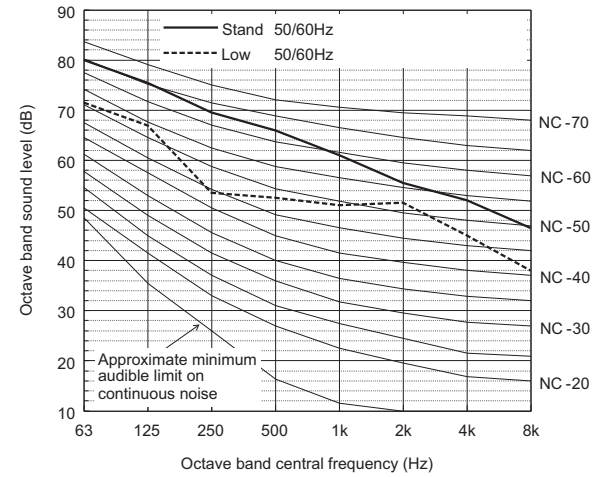

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	80.0	75.5	69.5	66.0	61.0	55.5	52.0	46.5	68.0
Low noise mode	50/60Hz	71.5	67.0	53.5	52.5	51.0	51.5	45.0	38.0	58.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.


Sound level of PUHY-EP1250YSLM-A1(-BS)

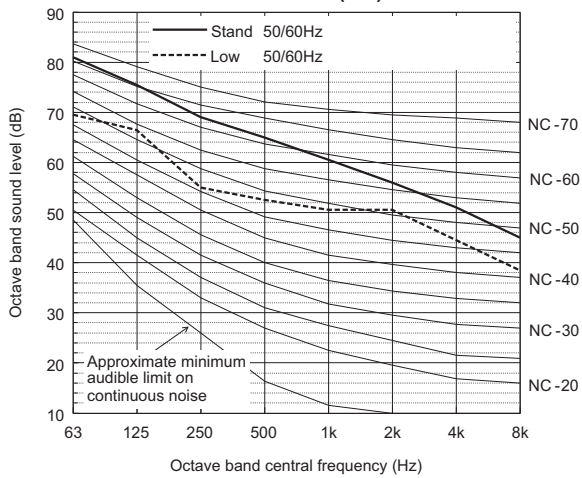

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	81.0	75.5	69.0	65.0	60.5	56.0	51.0	45.0	67.5
Low noise mode	50/60Hz	69.5	66.5	55.0	52.5	50.5	50.5	44.5	38.5	57.5

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

Sound level of PUHY-EP1350YSLM-A1(-BS)

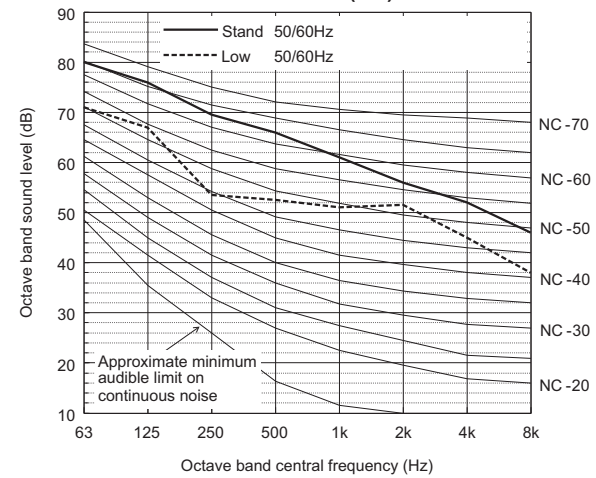

		63	125	250	500	1k	2k	4k	8k	dB(A)
Standard	50/60Hz	80.0	76.0	69.5	66.0	61.0	56.0	52.0	46.0	68.0
Low noise mode	50/60Hz	71.0	67.0	53.5	52.5	51.0	51.5	45.0	38.0	58.0

When Low noise mode is set, the A/C system's capacity is limited. The system could return to normal operation from Low noise mode automatically in the case that the operation condition is severe.

♦ Depending on the operation conditions, the unit generates noise caused by valve actuation, refrigerant flow, and pressure changes when operating normally. Please consider to avoid location where quietness is required.

[PUHY-EP200-500YLM, PUHY-EP550-1350YSLM]

Measurement condition

Measurement frequency: 1 Hz-80 Hz


Measurement point: Ground surface 20 cm away from the unit leg

Installation condition: Direct installation on the concrete floor

Power source: 3-phase 4-wire 380-400-415 V 50/60 Hz

Operation condition: JIS condition (cooling, heating)

Measurement device: Vibration level meter for vibration pollution VM-1220C (JIS-compliant product)

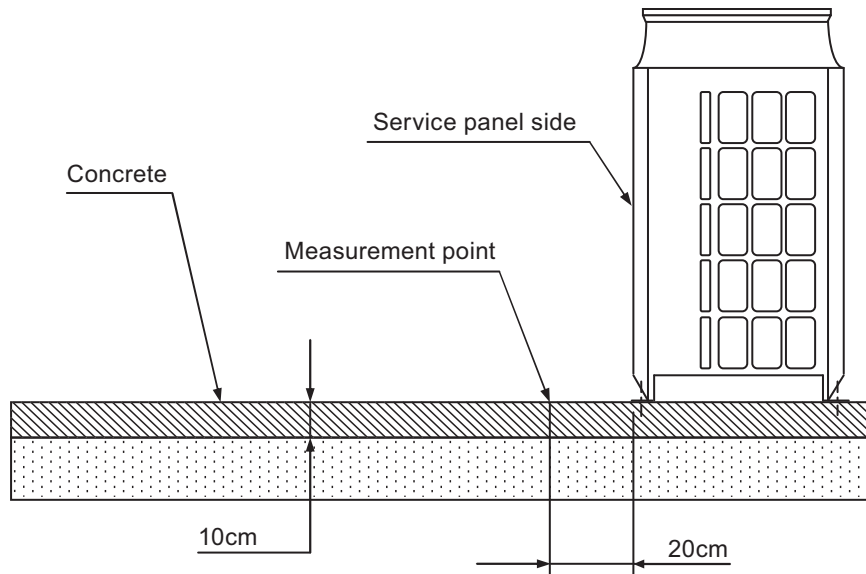


Vibration level


Model	Vibration level (dB)
PUHY-EP200YLM-A1 (-BS)	46
PUHY-EP250YLM-A1 (-BS)	46
PUHY-EP300YLM-A1 (-BS)	47
PUHY-EP350YLM-A1 (-BS)	47
PUHY-EP400YLM-A1 (-BS)	47
PUHY-EP450YLM-A1 (-BS)	47
PUHY-EP500YLM-A1 (-BS)	48
PUHY-EP550YSLM-A1 (-BS)	49.5
PUHY-EP600YSLM-A1 (-BS)	50
PUHY-EP650YSLM-A1 (-BS)	51
PUHY-EP700YSLM-A1 (-BS)	51
PUHY-EP750YSLM-A1 (-BS)	51.5
PUHY-EP800YSLM-A1 (-BS)	51.5
PUHY-EP850YSLM-A1 (-BS)	51.5
PUHY-EP900YSLM-A1 (-BS)	52
PUHY-EP950YSLM-A1 (-BS)	52
PUHY-EP1000YSLM-A1 (-BS)	52
PUHY-EP1050YSLM-A1 (-BS)	52
PUHY-EP1100YSLM-A1 (-BS)	52
PUHY-EP1150YSLM-A1 (-BS)	52
PUHY-EP1200YSLM-A1 (-BS)	52
PUHY-EP1250YSLM-A1 (-BS)	52
PUHY-EP1300YSLM-A1 (-BS)	52
PUHY-EP1350YSLM-A1 (-BS)	52

* Vibration level varies depending on the conditions of actual installation site.

• Cooling

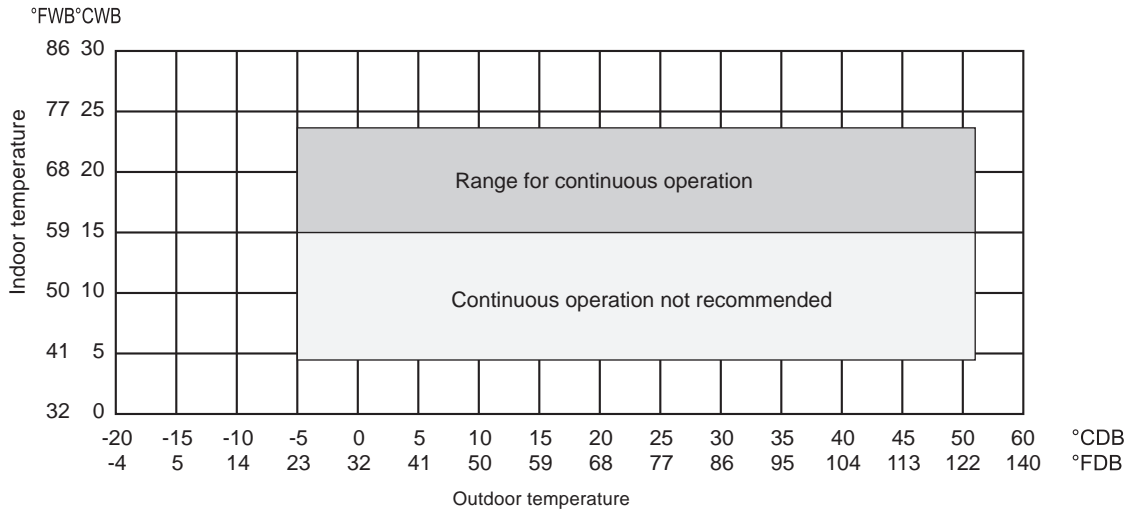

• Heating

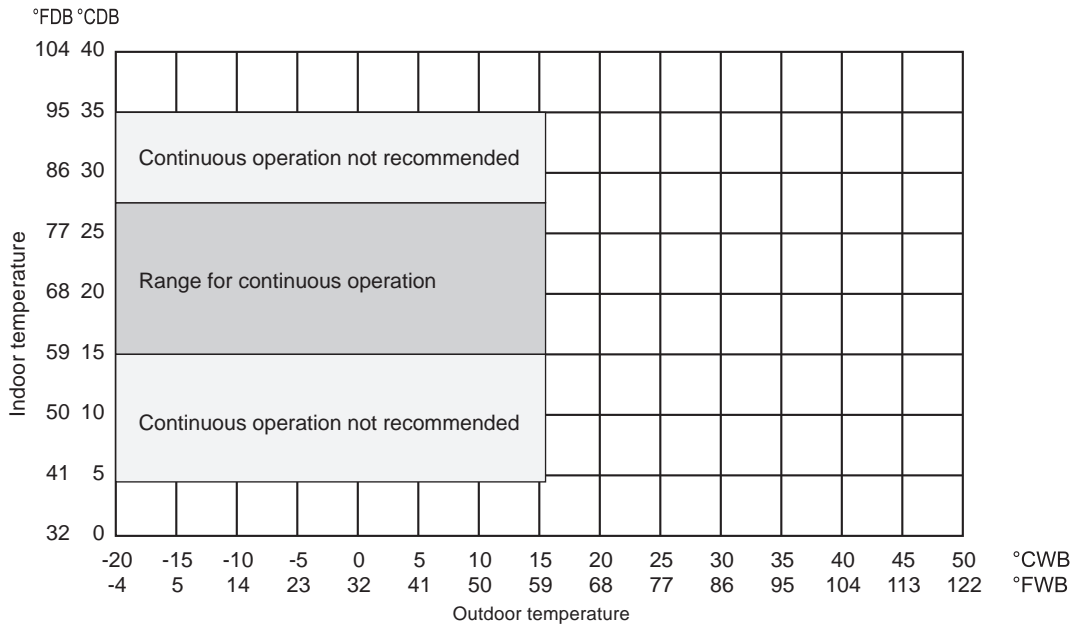

Y (HIGH COP)

Section 8-1.

Shows an example of how to select the indoor and outdoor units according to the required heating/cooling load.

Section 8-2. through 8-5.

Show the actual correction data of indoor and outdoor units.

8-1. Selection of Cooling/Heating Units

How to determine the capacity when less than or equal 100% indoor model size units are connected in total:

The purpose of this flow chart is to select the indoor and outdoor units. For other purposes, this flow chart is intended only for reference.

Y (HIGH COP)

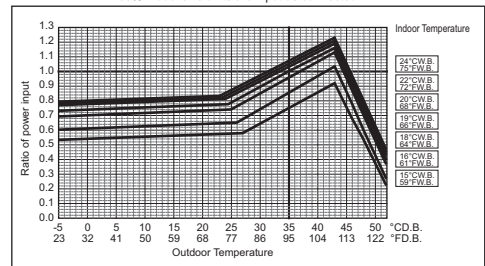
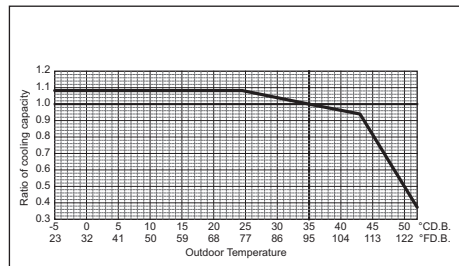

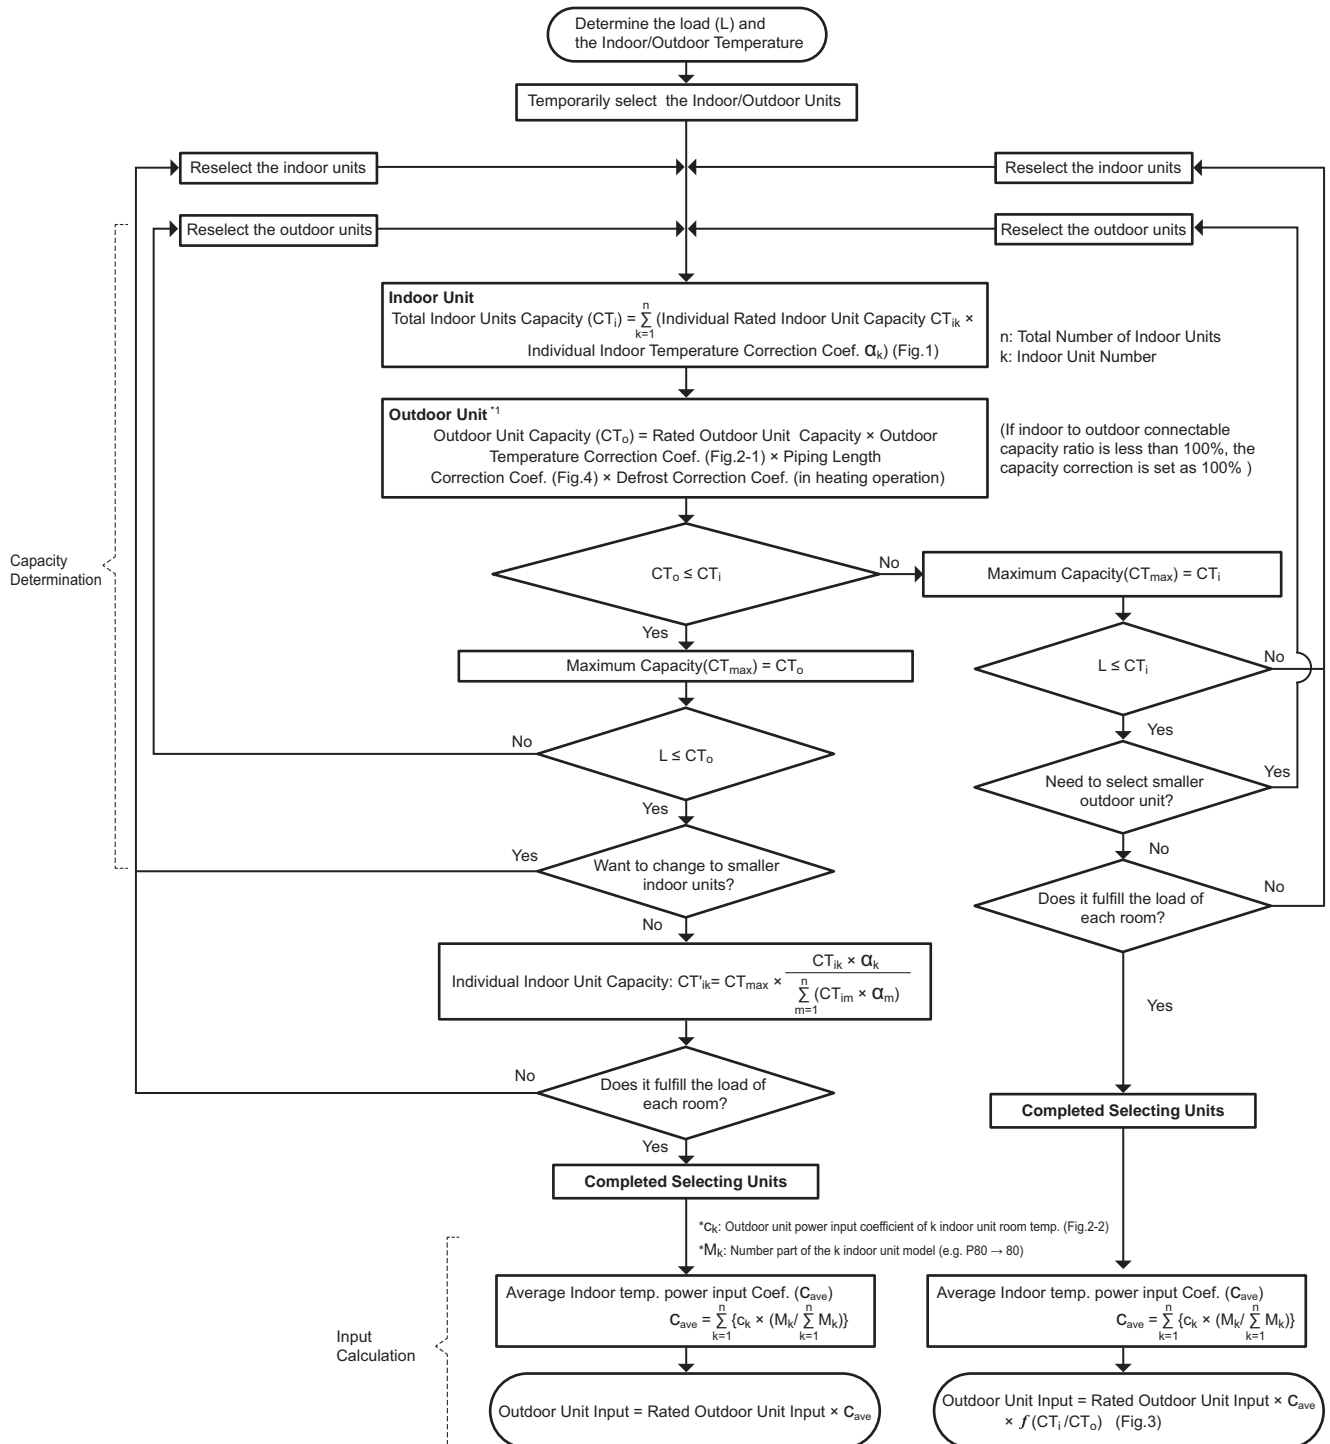


Fig.1 Indoor unit temperature correction


Fig.2-1 Outdoor unit temperature correction (capacity)

Fig.2-2 Outdoor unit temperature correction (power input)

*1 When the indoor unit sizes from P100 to P140 or total capacity indoor units from P81 to P140 are connected to only 1 port on the BC controller in the R2 system, the cooling capacity of the indoor unit should be multiplied by a correction factor of 0.97.

How to determine the capacity when greater than 100% indoor model size units are connected in total:

The purpose of this flow chart is to select the indoor and outdoor units. For other purposes, this flow chart is intended only for reference.

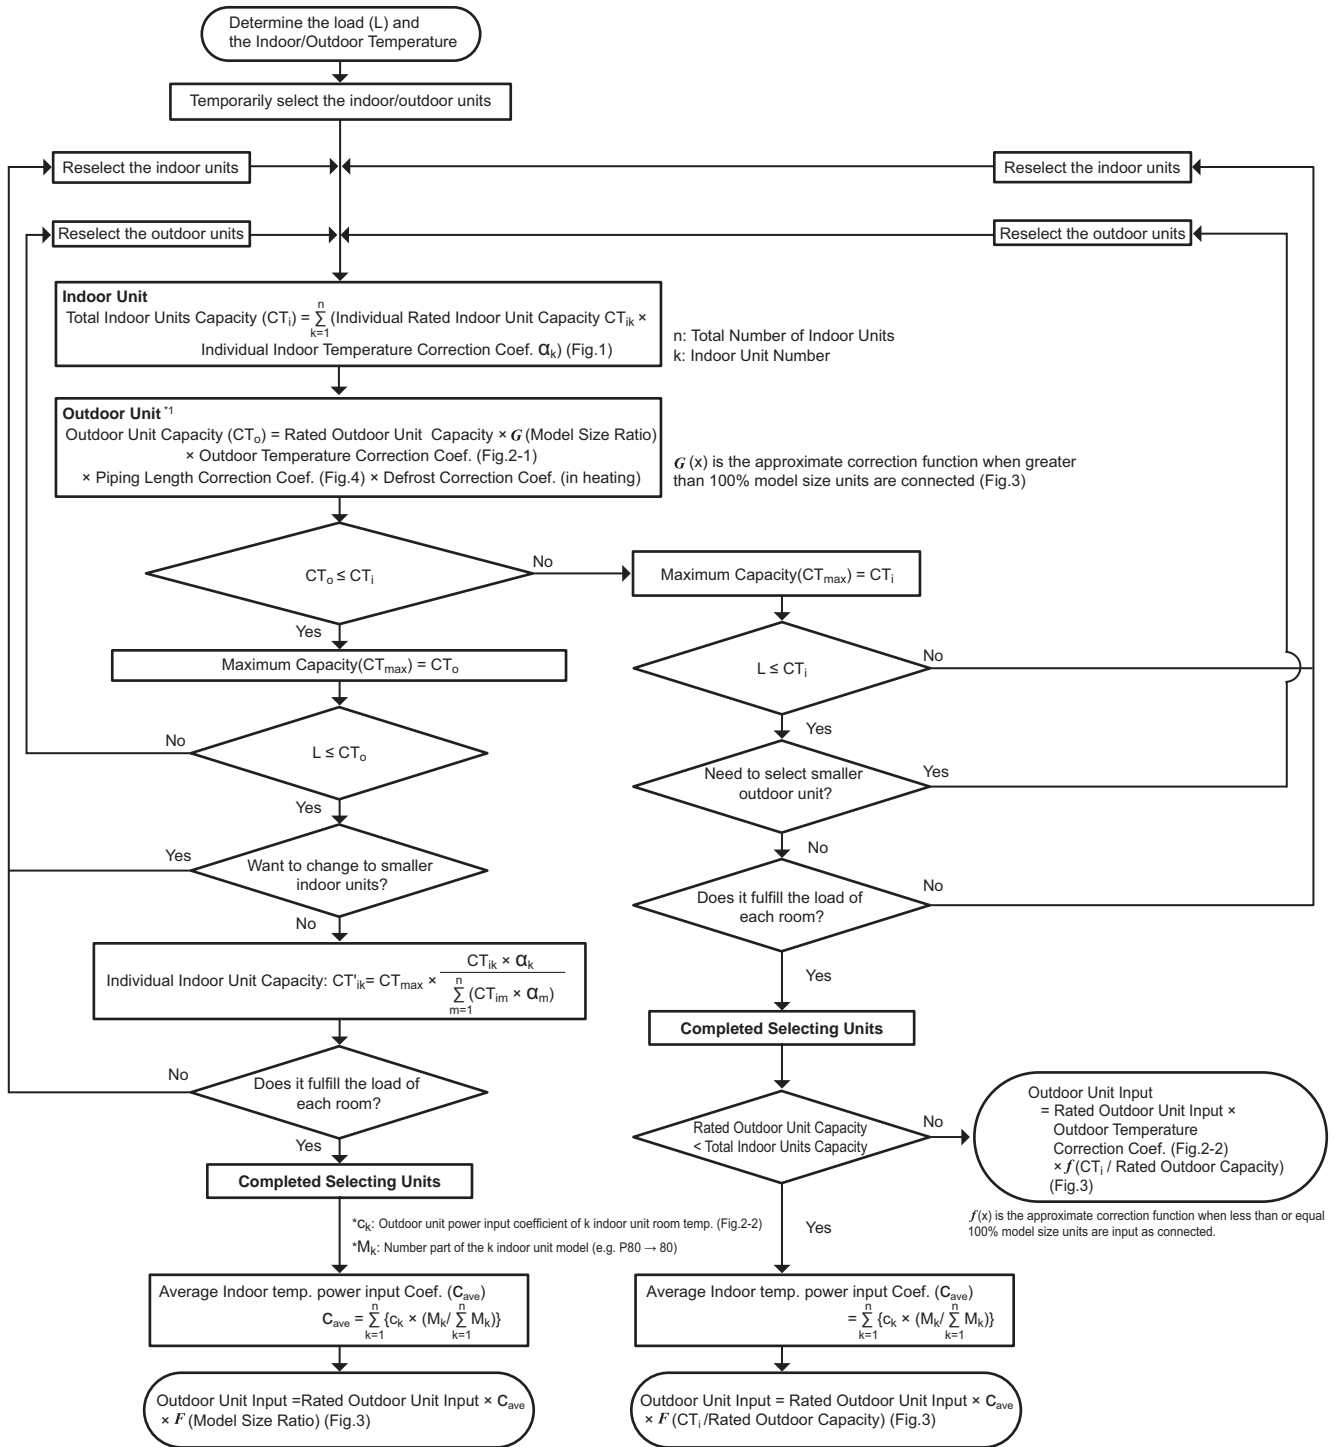

γ (HIGH COP)

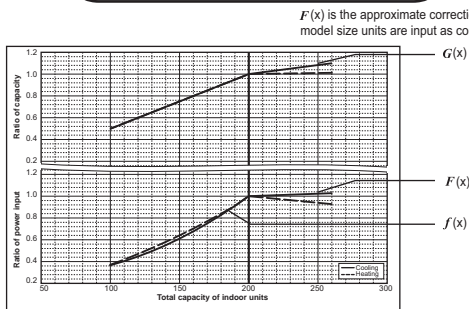


Fig.3 Correction by total indoor

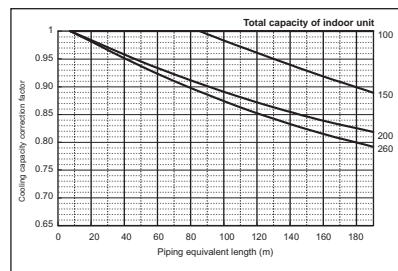


Fig.4 Correction of refrigerant piping length

*1 When the indoor unit sizes from P100 to P140 or total capacity indoor units from P81 to P140 are connected to only 1 port on the BC controller in the R2 system, the cooling capacity of the indoor unit should be multiplied by a correction factor of 0.97.

<Cooling>

Design Condition	
Outdoor Design Dry Bulb Temperature	37 °C
Total Cooling Load	19.0 kW
Room1	
Indoor Design Dry Bulb Temperature	27 °C
Indoor Design Wet Bulb Temperature	20 °C
Cooling Load	9.0 kW
Room2	
Indoor Design Dry Bulb Temperature	24 °C
Indoor Design Wet Bulb Temperature	18 °C
Cooling Load	10.0 kW
<Other>	
Indoor/Outdoor Equivalent Piping Length	50 m

Y (HIGH COP)

1. Cooling Calculation

(1) Temporary Selection of Indoor Units

Room1	PLFY-P100	11.2 kW (Rated)
Room2	PEFY-P100	11.2 kW (Rated)

(2) Total Indoor Units Capacity

$$P100 + P100 = P200$$

(3) Selection of Outdoor Unit

The P200 outdoor unit is selected as total indoor units capacity is P200

PUHY-EP200	22.4 kW
------------	---------

(4) Total Indoor Units Capacity Correction Calculation

Room1	Indoor Design Wet Bulb Temperature Correction (20°C)	1.03 (Refer to Fig.1)
Room2	Indoor Design Wet Bulb Temperature Correction (18°C)	0.98 (Refer to Fig.1)

Total Indoor Units Capacity (CTi)

$$\begin{aligned} CTi &= \Sigma (\text{Indoor Unit Rating} \times \text{Indoor Design Temperature Correction}) \\ &= 11.2 \times 1.03 + 11.2 \times 0.98 \\ &= 22.5 \text{ kW} \end{aligned}$$

(5) Outdoor Unit Correction Calculation

Outdoor Design Dry Bulb Temperature Correction (37°C)	0.99 (Refer to Fig.2)
Piping Length Correction (50 m)	0.95 (Refer to Fig.3)

Total Outdoor Unit Capacity (CTo)

$$\begin{aligned} CTo &= \text{Outdoor Rating} \times \text{Outdoor Design Temperature Correction} \times \text{Piping Length Correction} \\ &= 22.4 \times 0.99 \times 0.95 \\ &= 21.0 \text{ kW} \end{aligned}$$

(6) Determination of Maximum System Capacity (CTx)

Comparison of Capacity between Total Indoor Units Capacity (CTi) and Total Outdoor Unit Capacity (CTo)

$$CTi = 22.5 > CTo = 21.0, \text{ thus, select } CTo.$$

$$CTx = CTo = 21.0 \text{ kW}$$

(7) Comparison with Essential Load

Against the essential load 19.0kW, the maximum system capacity is 21.0kW: Proper outdoor units have been selected.

(8) Calculation of Maximum Indoor Unit Capacity of Each Room

CTx = CTo, thus, calculate by the calculation below

Room1

$$\begin{aligned} &\text{Maximum Capacity} \times \text{Room1 Capacity after the Temperature Correction} / (\text{Room1,2 Total Capacity after the Temperature Correction}) \\ &= 21.0 \times (11.2 \times 1.03) / (11.2 \times 1.03 + 11.2 \times 0.98) \\ &= 10.8 \text{ kW} \quad \text{OK: fulfills the load 9.0kW} \end{aligned}$$

Room2

$$\begin{aligned} &\text{Maximum Capacity} \times \text{Room2 Capacity after the Temperature Correction} / (\text{Room1,2 Total Capacity after the Temperature Correction}) \\ &= 21.0 \times (11.2 \times 0.98) / (11.2 \times 1.03 + 11.2 \times 0.98) \\ &= 10.2 \text{ kW} \quad \text{OK: fulfills the load 10.0kW} \end{aligned}$$

Go on to the heating trial calculation since the selected units fulfill the cooling loads of Room 1, 2.

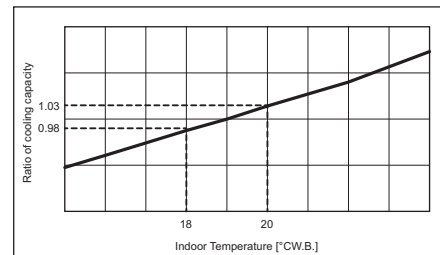


Fig.1 Indoor unit temperature correction
To be used to correct indoor unit only

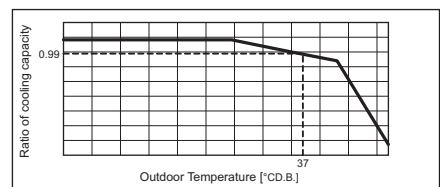


Fig.2 Outdoor unit temperature correction
To be used to correct outdoor unit only

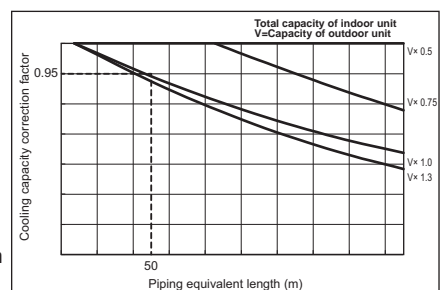


Fig.3 Correction of refrigerant piping length

<Heating>

Design Condition	
Outdoor Design Wet Bulb Temperature	-3 °C
Total Heating Load	18.5 kW
Room1	
Indoor Design Dry Bulb Temperature	25 °C
Heating Load	9.5 kW
Room2	
Indoor Design Dry Bulb Temperature	25 °C
Heating Load	9.0 kW
<Other>	
Indoor/Outdoor Equivalent Piping Length	60 m

2. Heating Calculation

(1) Temporary Selection of Indoor Units

Room1	PLFY-P100	12.5 kW (Rated)
Room2	PEFY-P100	12.5 kW (Rated)

(2) Total Indoor Units Capacity

$P100 + P100 = P200$

(3) Selection of Outdoor Unit

The P200 outdoor unit is selected as total indoor units capacity is P200

PUHY-EP200	25.0 kW
------------	---------

(4) Total Indoor Units Capacity Correction Calculation

Room1	Indoor Design Dry Bulb Temperature Correction (25°C)	0.80 (Refer to Fig.4)
Room2	Indoor Design Dry Bulb Temperature Correction (25°C)	0.80 (Refer to Fig.4)

Total Indoor Units Capacity (CTi)

$$CTi = \sum (\text{Indoor Unit Rating} \times \text{Indoor Design Temperature Correction})$$

$$= 12.5 \times 0.80 + 12.5 \times 0.80$$

$$= 20.0 \text{ kW}$$

(5) Outdoor Unit Correction Calculation

Outdoor Design Wet Bulb Temperature Correction (-3°C)	0.98 (Refer to Fig.5)
Piping Length Correction (60 m)	0.97 (Refer to Fig.6)
Defrost Correction	0.89 (Refer to Tbl.1)

Total Outdoor Unit Capacity (CTo)

$$CTo = \text{Outdoor Unit Rating} \times \text{Outdoor Design Temperature Correction} \times \text{Piping Length Correction} \times \text{Defrost Correction}$$

$$= 25.0 \times 0.98 \times 0.97 \times 0.89$$

$$= 21.1 \text{ kW}$$

(6) Determination of Maximum System Capacity (CTx)

Comparison of Capacity between Total Indoor Units Capacity (CTi) and Total Outdoor Unit Capacity (CTo)

$CTi = 20.0 < CTo = 21.1$, thus, select CTi.

$CTx = CTi = 20.0 \text{ kW}$

(7) Comparison with Essential Load

Against the essential load 18.5kW, the maximum system capacity is 20.0kW: Proper outdoor units have been selected.

(8) Calculation of Maximum Indoor Unit Capacity of Each Room

$CTx = CTi$, thus, calculate by the calculation below

Room1	Indoor Unit Rating × Indoor Design Temperature Correction	
	$= 12.5 \times 0.80$	
	$= 10.0 \text{ kW}$	OK: fulfills the load 9.5kW

Room2	Indoor Unit Rating × Indoor Design Temperature Correction	
	$= 12.5 \times 0.80$	
	$= 10.0 \text{ kW}$	OK: fulfills the load 9.0kW

Completed selecting units since the selected units fulfill the heating loads of Room 1, 2.

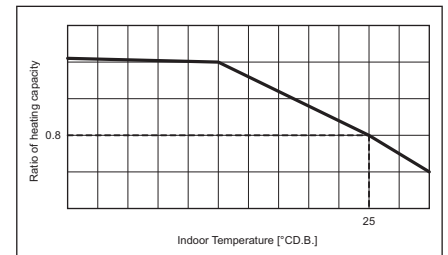


Fig.4 Indoor unit temperature correction
To be used to correct indoor unit only

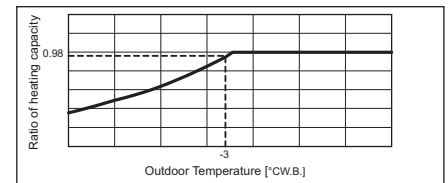


Fig.5 Outdoor unit temperature correction
To be used to correct outdoor unit only

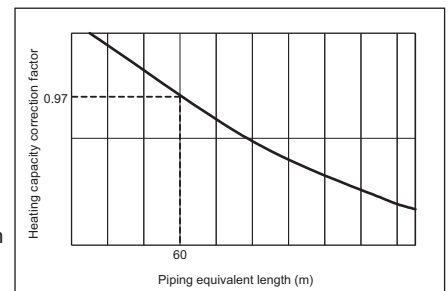


Fig.6 Correction of refrigerant piping length

Tbl.1 Table of correction factor at frost and defrost

Outdoor inlet air temp. °C	6	4	2	1	0	-2	-4	-6	-8	-10	-20
Outdoor inlet air temp. °F	43	39	36	34	32	28	25	21	18	14	-4
PUHY-P200	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-P250	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-P300	1.00	0.93	0.82	0.80	0.82	0.86	0.90	0.90	0.95	0.95	0.95
PUHY-P350	1.00	0.93	0.85	0.83	0.84	0.86	0.90	0.90	0.95	0.95	0.95
PUHY-P400	1.00	0.93	0.85	0.83	0.84	0.86	0.90	0.90	0.95	0.95	0.95

3. Power input of outdoor unit

<Cooling>

(1) Rated power input of outdoor unit **5.19 kW****(2) Calculation of the average indoor temperature power input coefficient**

Coefficient of the outdoor unit for indoor unit 1 (Outdoor temp. 37 °CD.B., Indoor temp. 20 °CW.B.)

1.07

Coefficient of the outdoor unit for indoor unit 2 (Outdoor temp. 37 °CD.B., Indoor temp. 18 °CW.B.)

1.00

$$\text{Average indoor temp. power input coefficient } (C_{ave}) = \sum_{k=1}^n \{c_k \times (M_k / \sum_{k=1}^n M_k)\}$$

n: Total number of the indoor units

k: Number of the indoor unit

c_k: Outdoor unit power input coefficient of k indoor unit room temp.M_k: Number part of the k indoor unit model (e.g. P80 → 80)

$$= 1.07 \times 100 / (100 + 100) + 1 \times 100 / (100 + 100)$$

$$= 1.04$$

(3) No need to consider Coefficient of the partial load $f(CTi/CTo)$ -**(4) Outdoor power input (P_{lo})**Maximum System Capacity (CT_x) = Total Outdoor unit Capacity (CT_o), so use the following formulaP_{lo} = Outdoor unit Cooling Rated Power Input × Correction Coefficient of Indoor temperature

$$= 5.19 \times 1.04$$

$$= 5.4 \text{ kW}$$

<Heating>

(1) Rated power input of outdoor unit **5.73 kW****(2) Calculation of the average indoor temperature power input coefficient**Coefficient of the outdoor unit for indoor unit 1 (Outdoor temp. -3 °CW.B., Indoor temp. 20 °CD.B.)
1.08Coefficient of the outdoor unit for indoor unit 2 (Outdoor temp. -3 °CW.B., Indoor temp. 25 °CD.B.)
1.08

$$\text{Average indoor temp. power input coefficient } (C_{ave}) = \sum_{k=1}^n \{c_k \times (M_k / \sum_{k=1}^n M_k)\}$$

n: Total number of the indoor units

k: Number of the indoor unit

c_k: Outdoor unit power input coefficient of k indoor unit room temp.M_k: Number part of the k indoor unit model (e.g. P80 → 80)

$$= 1.08 \times 100 / (100 + 100) + 1.08 \times 100 / (100 + 100)$$

$$= 1.08$$

(3) Coefficient of the partial load f (CTi/CTo) **0.91****(4) Outdoor power input (P_{lo})**Maximum System Capacity (CT_x) = Total Indoor unit Capacity (CT_i), so use the following formula

$$P_{lo} = \text{Outdoor unit Heating Rated Power Input} \times \text{Correction Coefficient of Indoor temperature} \times f(\text{CT}_i/\text{CT}_o)$$

$$= 5.73 \times 1.08 \times 0.91$$

$$= 5.65 \text{ kW}$$


8-2. Correction by temperature

CITY MULTI could have varied capacity at different designing temperature. Using the nominal cooling/heating capacity value and the ratio below, the capacity can be observed at various temperature.

PUHY-		EP200YLM-A1	EP250YLM-A1
Nominal Cooling Capacity	kW	22.4	28.0
	BTU/h	76,400	95,500
Input	kW	5.19	6.89

Indoor unit temperature correction

To be used to correct indoor unit capacity only

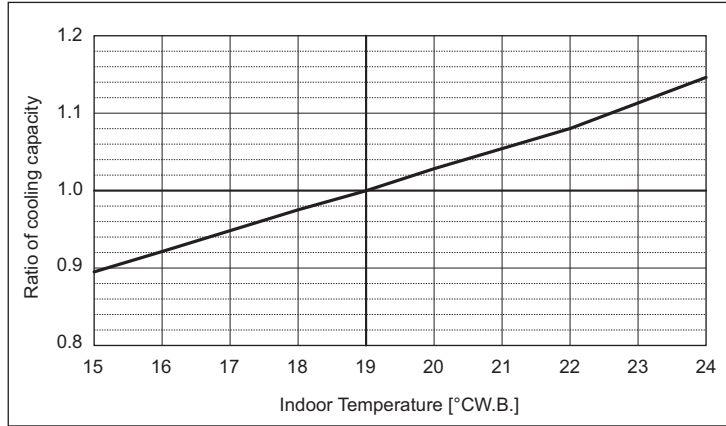


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

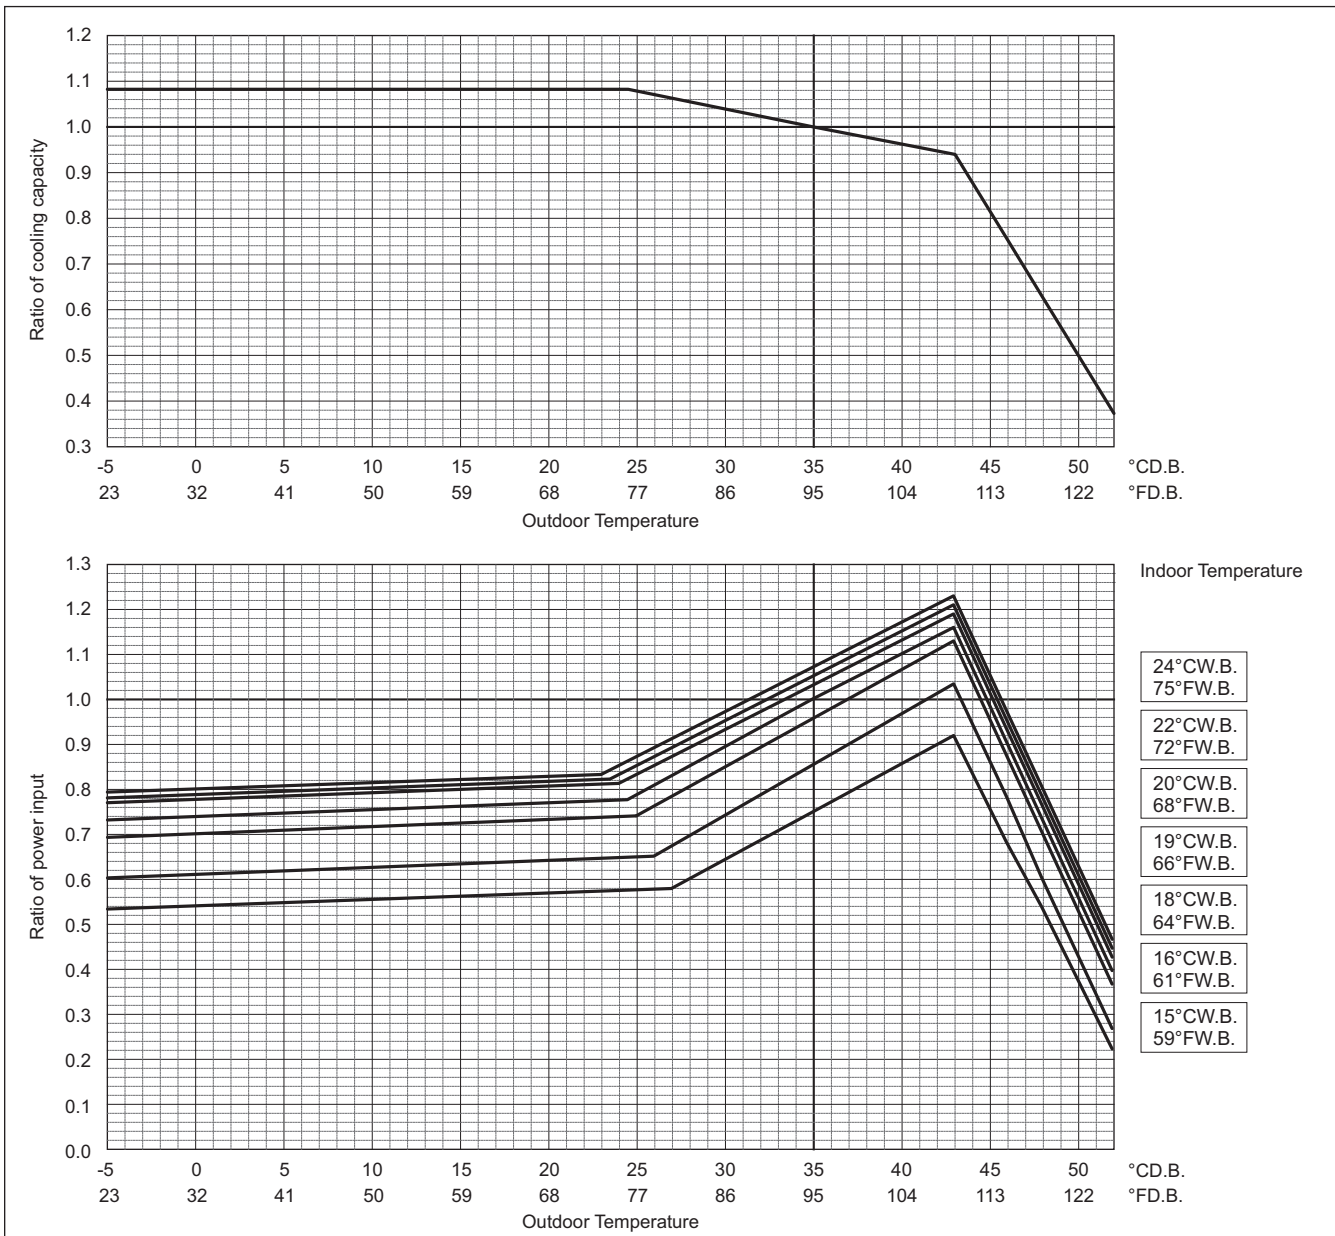


Y (HIGH COP)

PUHY-	EP200YLM-A1	EP250YLM-A1
Nominal Heating Capacity	kW 25.0	31.5
	BTU/h 85,300	107,500
Input	kW 5.73	7.68

Indoor unit temperature correction

To be used to correct indoor unit capacity only

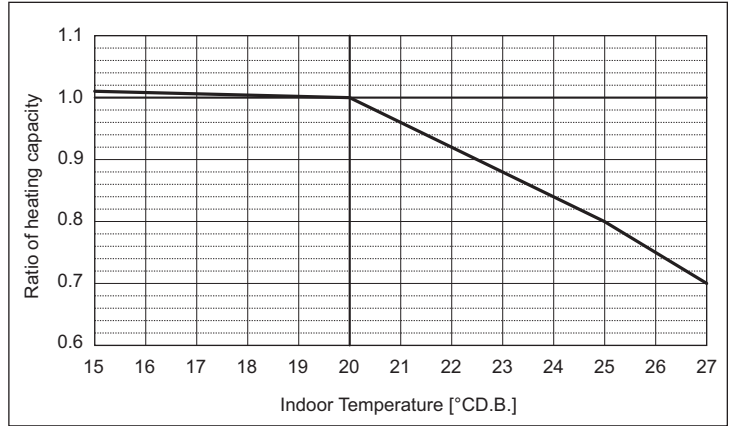


γ (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.


Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

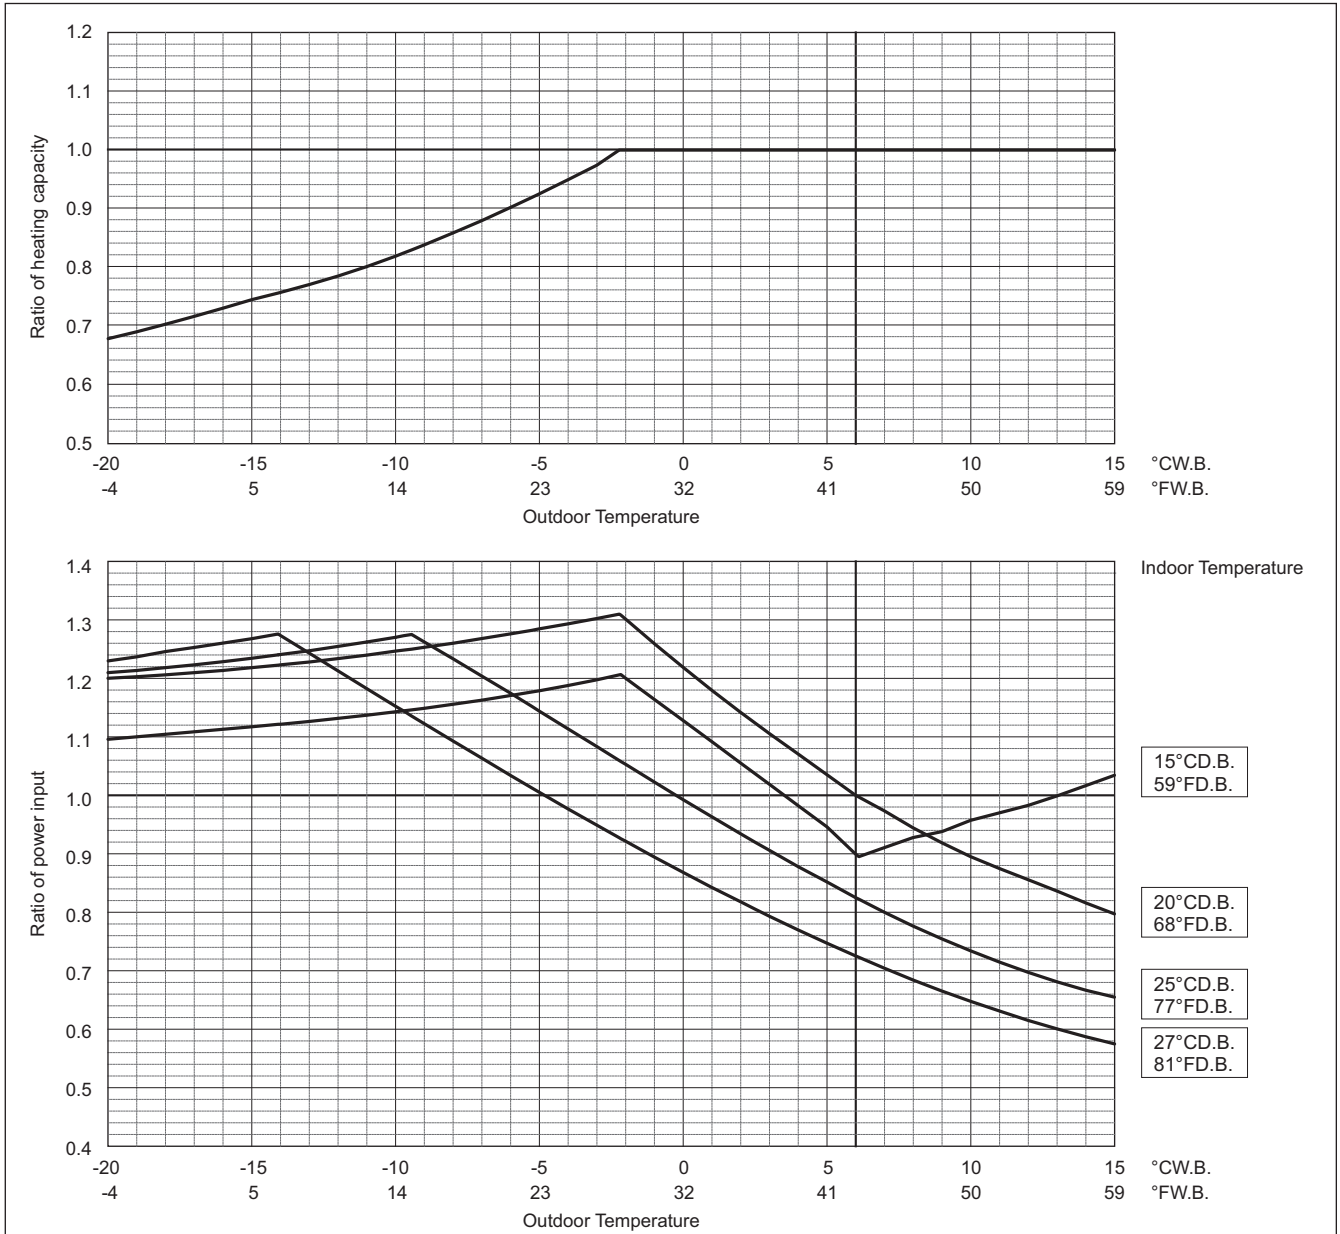

PUHY-		EP300YLM-A1	EP350YLM-A1
Nominal Cooling Capacity	kW	33.5	40.0
	BTU/h	114,300	136,500
Input	kW	8.56	11.69

Indoor unit temperature correction

To be used to correct indoor unit capacity only

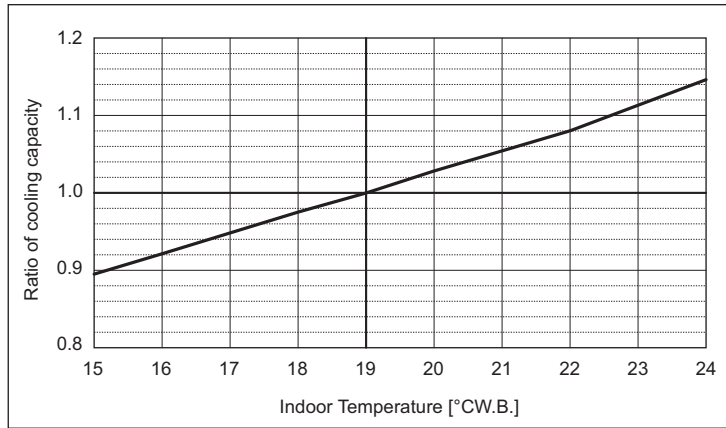


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.


Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

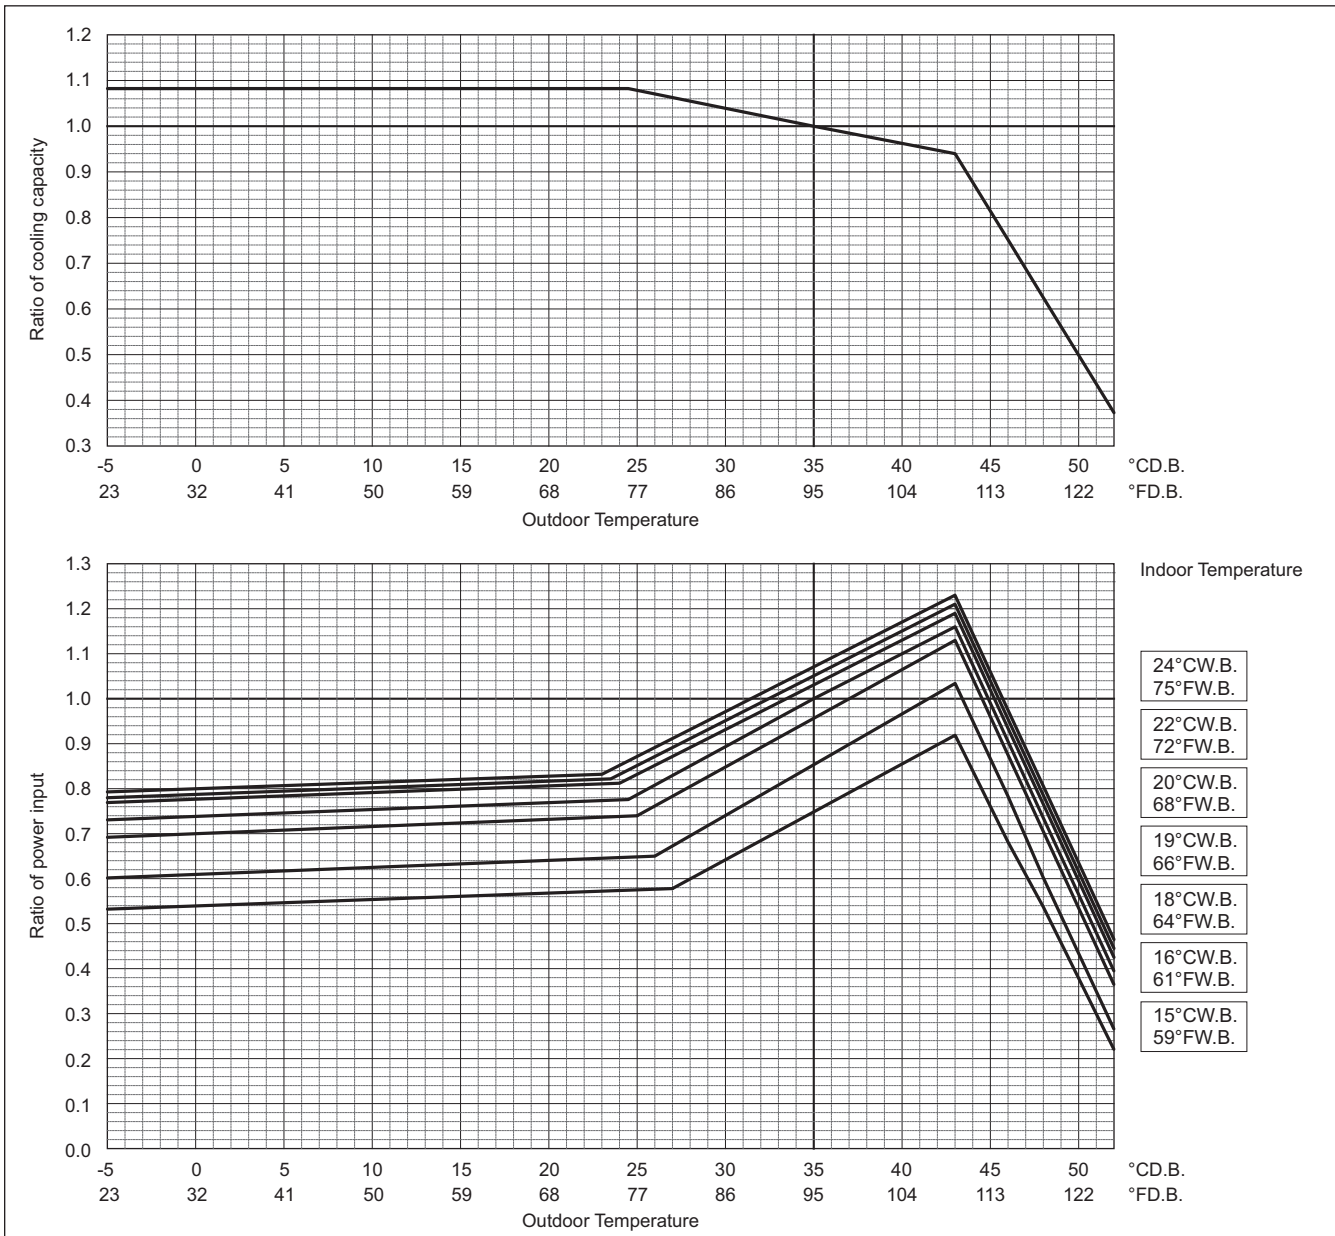

PUHY-	EP300YLM-A1	EP350YLM-A1
Nominal Heating Capacity	kW 37.5	45.0
	BTU/h 128,000	153,500
Input	kW 9.16	12.53

Indoor unit temperature correction

To be used to correct indoor unit capacity only

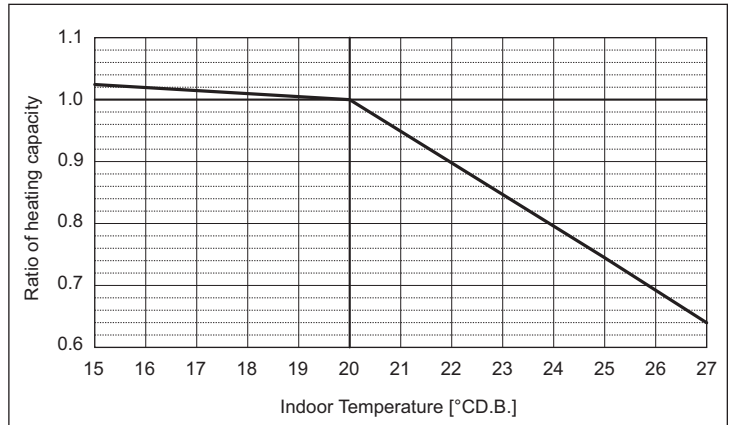


γ (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only


Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

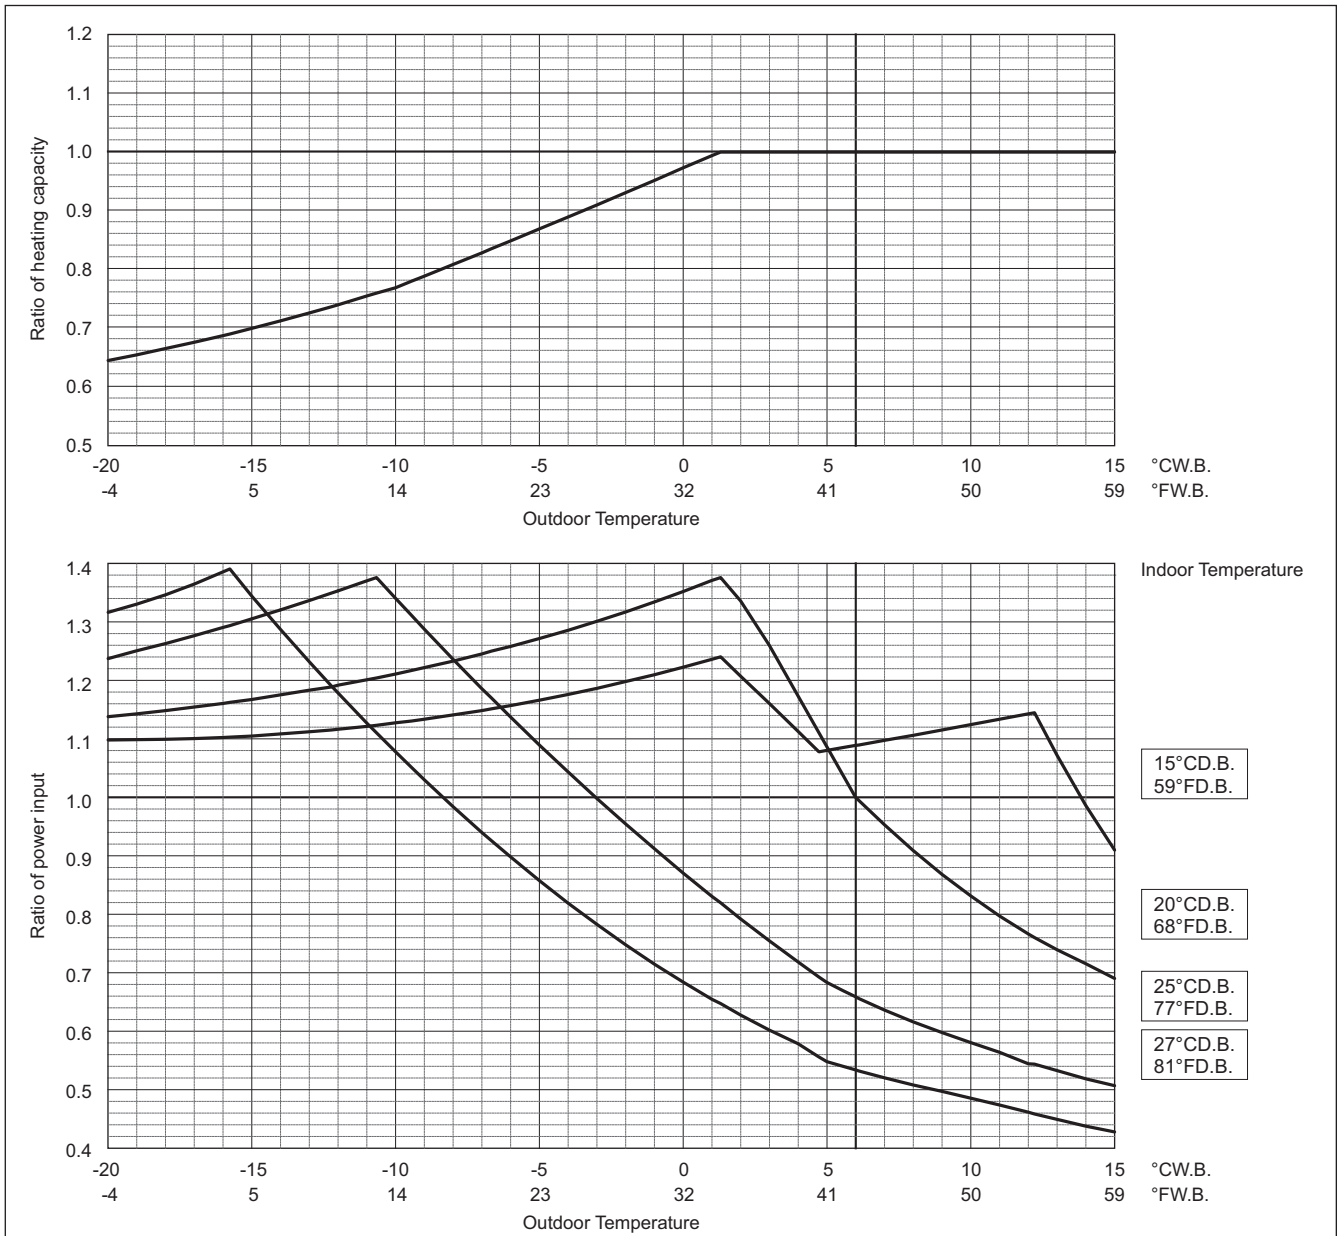

PUHY-		EP400YLM-A1	EP450YLM-A1	EP500YLM-A1
Nominal Cooling Capacity	kW	45.0	50.0	56.0
	BTU/h	153,500	170,600	191,100
Input	kW	12.26	14.79	18.72

Indoor unit temperature correction
To be used to correct indoor unit capacity only

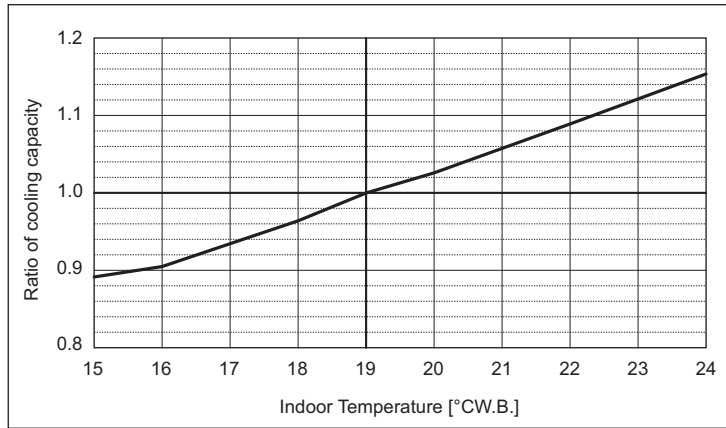


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.


Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

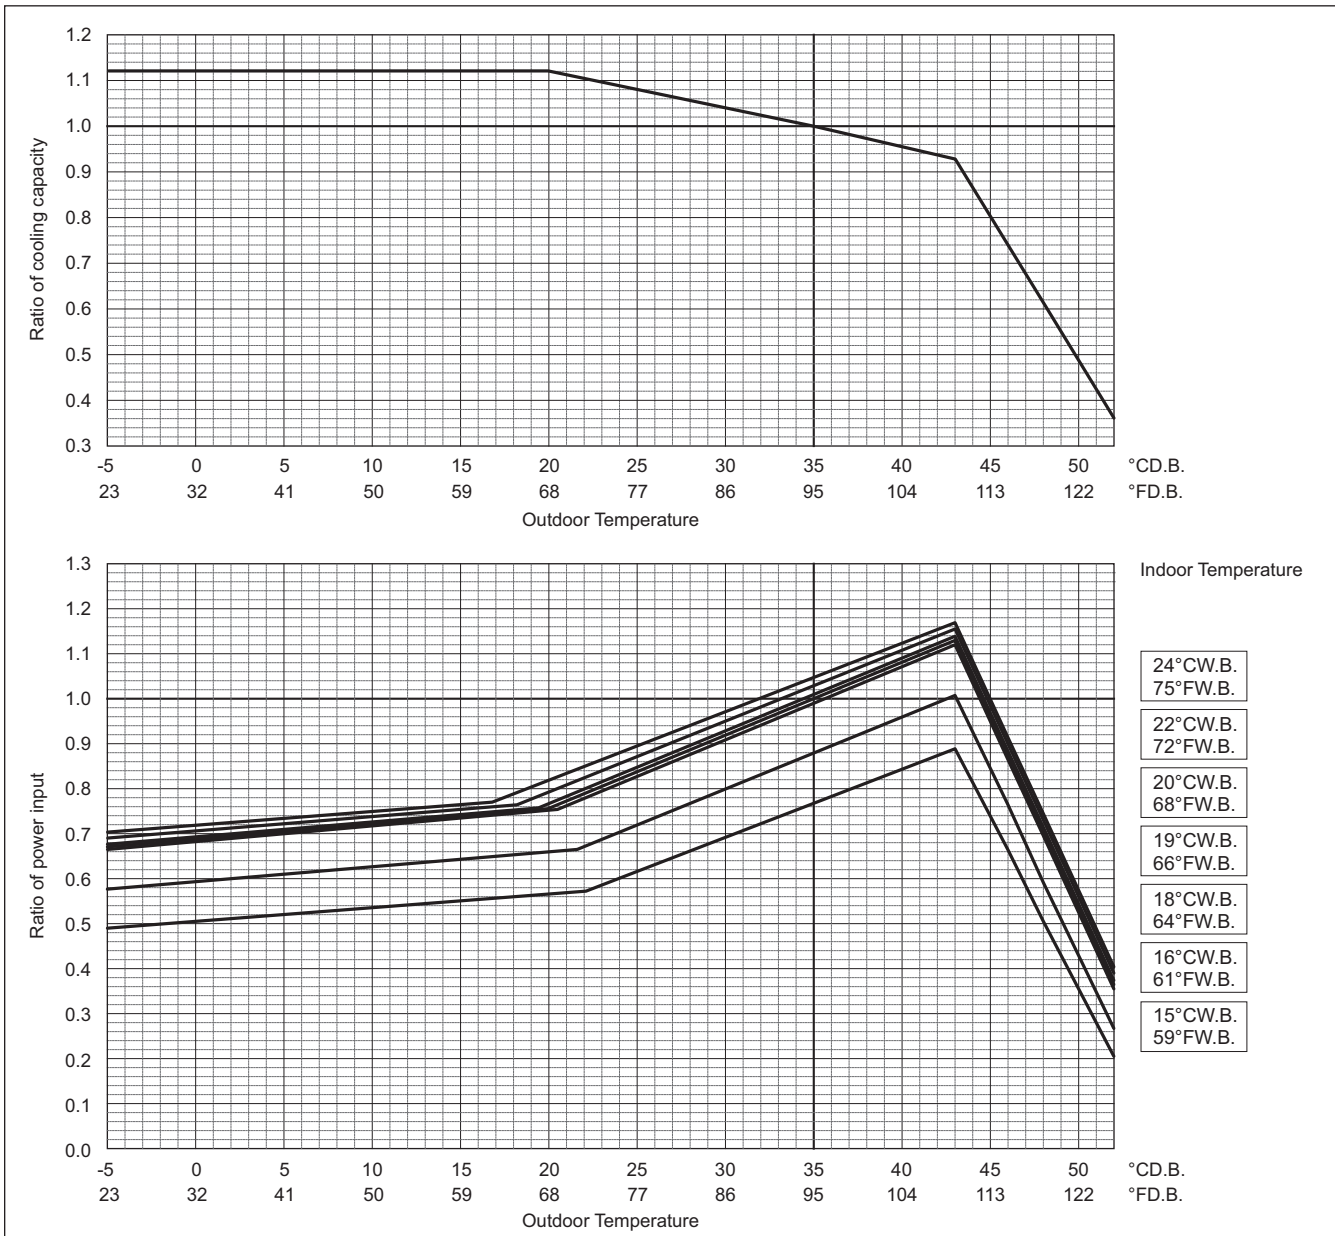

PUHY-	EP400YLM-A1	EP450YLM-A1	EP500YLM-A1
Nominal Heating Capacity	kW 50.0	56.0	63.0
	BTU/h 170,600	191,100	215,000
Input	kW 13.15	16.09	19.68

Indoor unit temperature correction

To be used to correct indoor unit capacity only

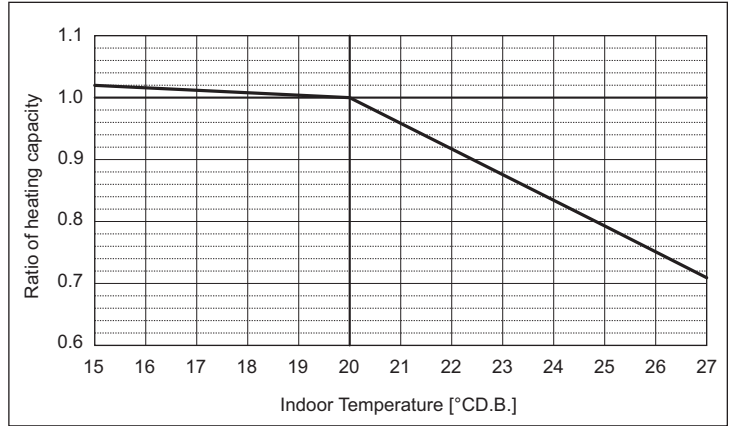


Y (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only


Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

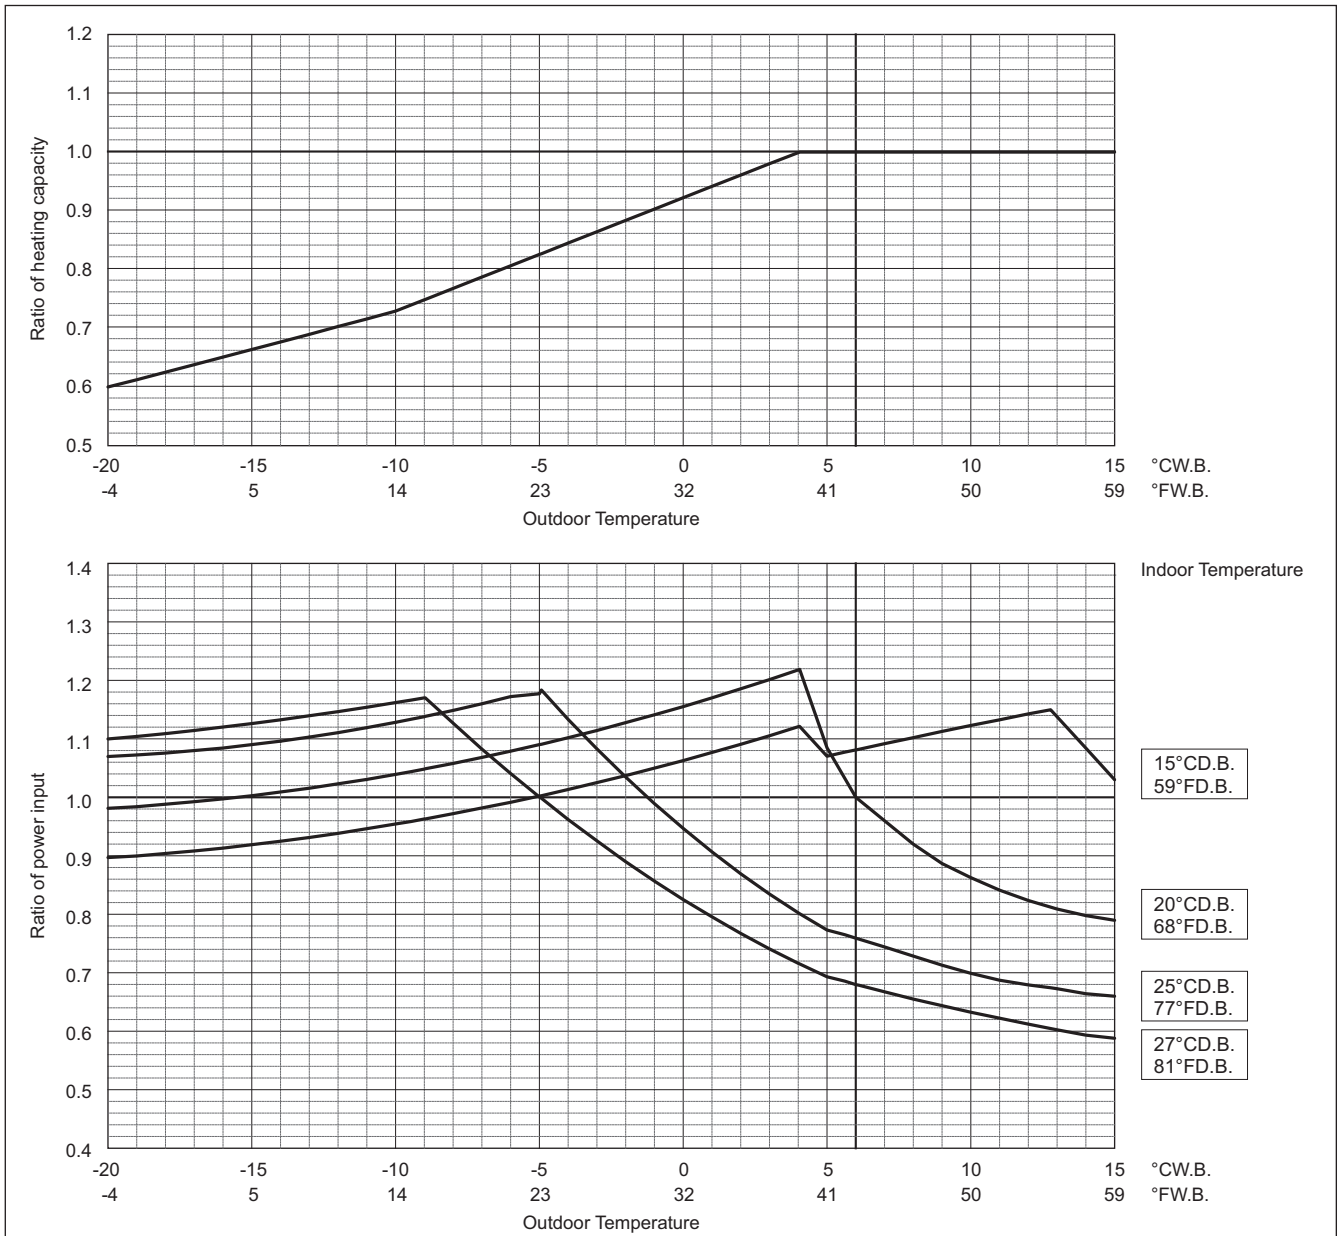

PUHY-		EP550YSLM-A1	EP600YSLM-A1	EP650YSLM-A1
Nominal Cooling Capacity	kW	63.0	69.0	73.0
	BTU/h	215,000	235,400	249,100
Input	kW	16.62	18.59	18.15

Indoor unit temperature correction
To be used to correct indoor unit capacity only

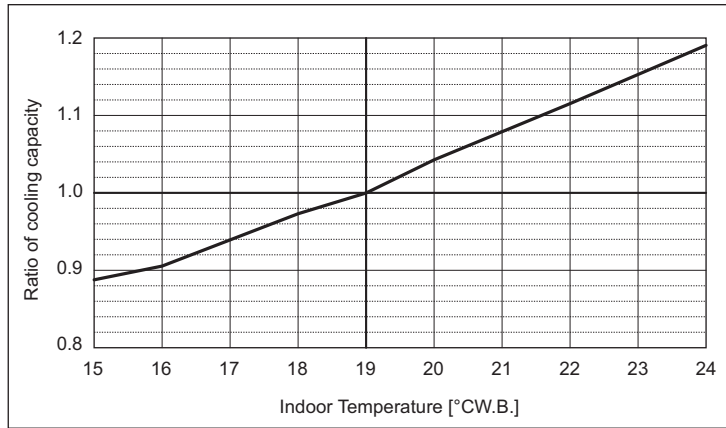


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.


Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

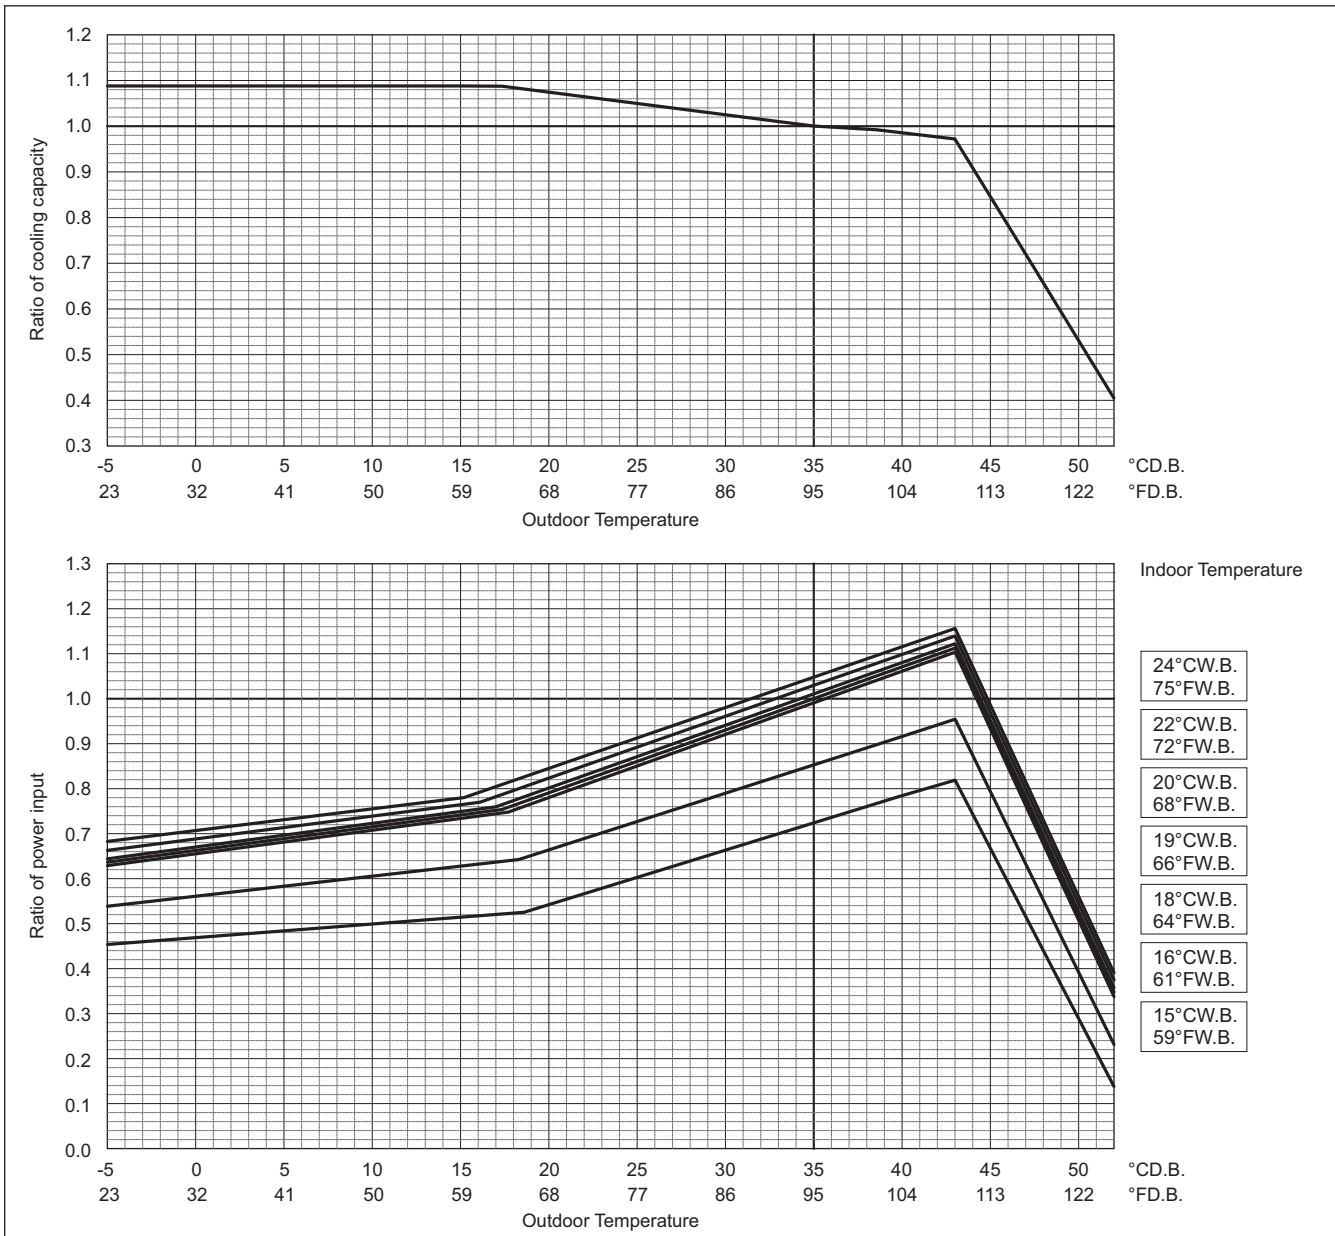

PUHY-	EP550YSLM-A1	EP600YSLM-A1	EP650YSLM-A1
Nominal Heating Capacity	kW 69.0	76.5	81.5
	BTU/h 235,400	261,000	278,100
Input	kW 17.73	19.66	20.07

Indoor unit temperature correction

To be used to correct indoor unit capacity only

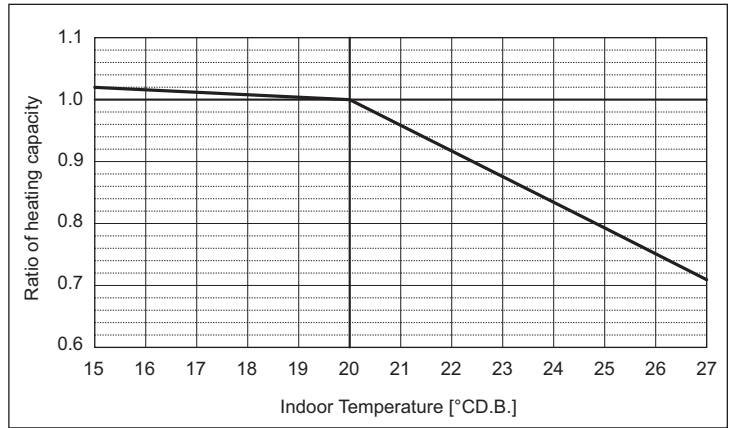


Y (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only


Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

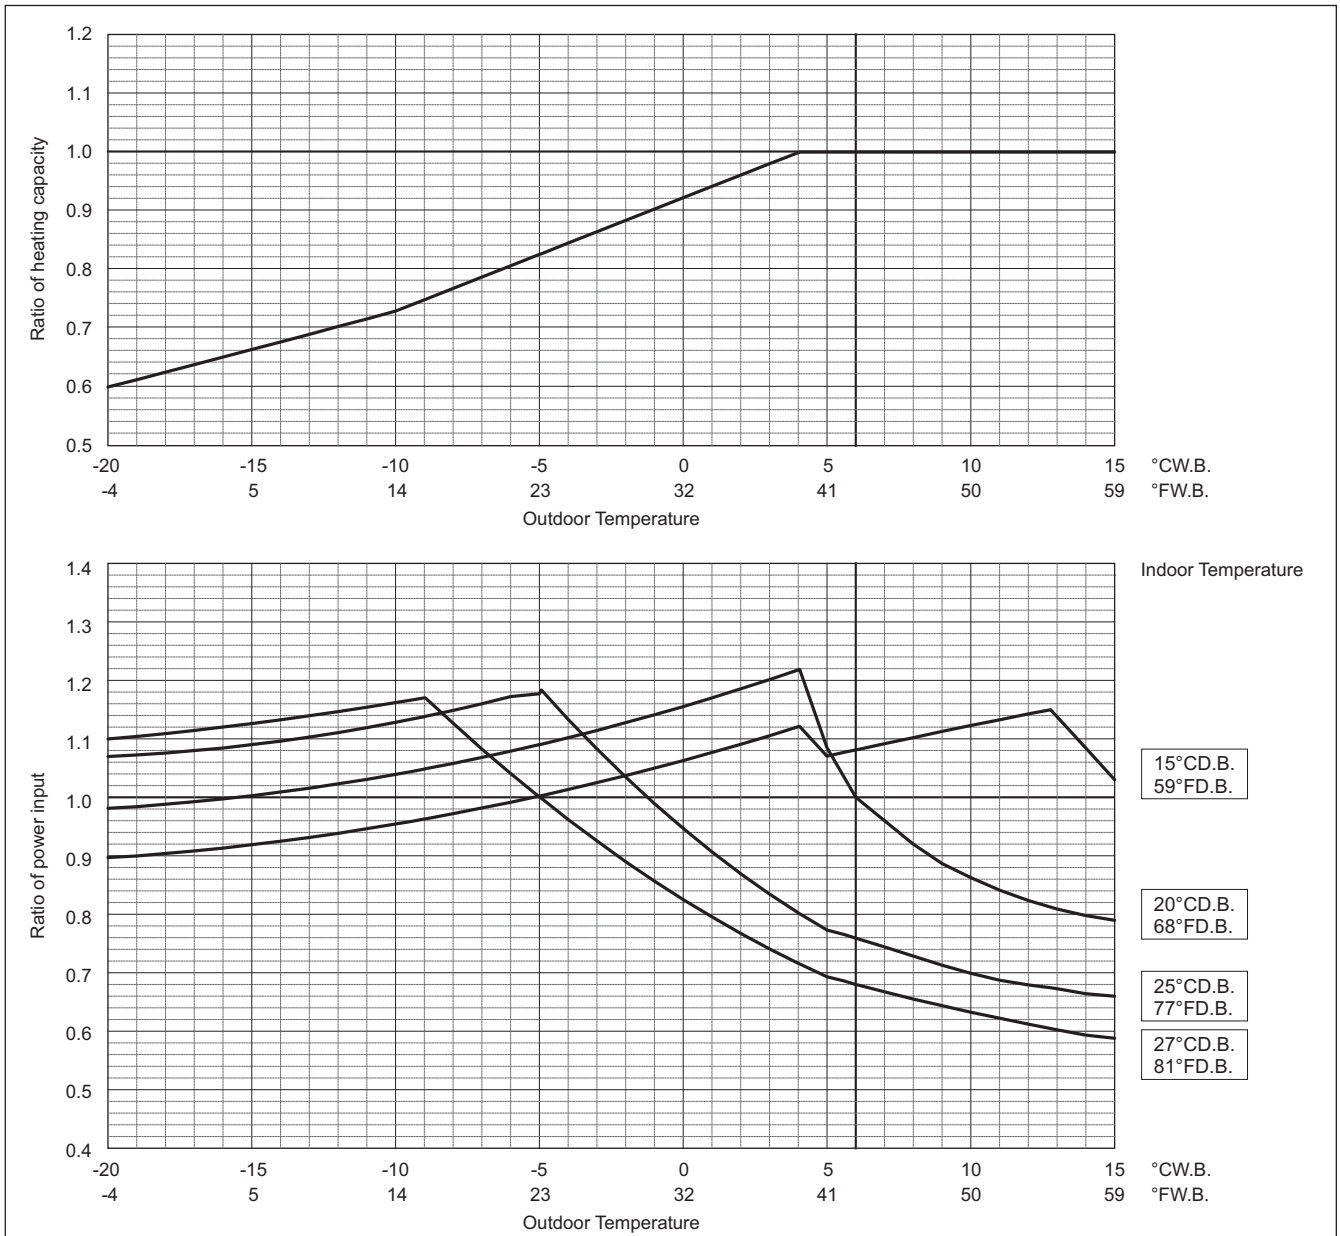

PUHY-		EP700YSLM-A1	EP750YSLM-A1	EP800YSLM-A1
Nominal Cooling Capacity	kW	80.0	85.0	90.0
	BTU/h	273,000	290,000	307,100
Input	kW	20.15	21.85	23.43

Indoor unit temperature correction
To be used to correct indoor unit capacity only

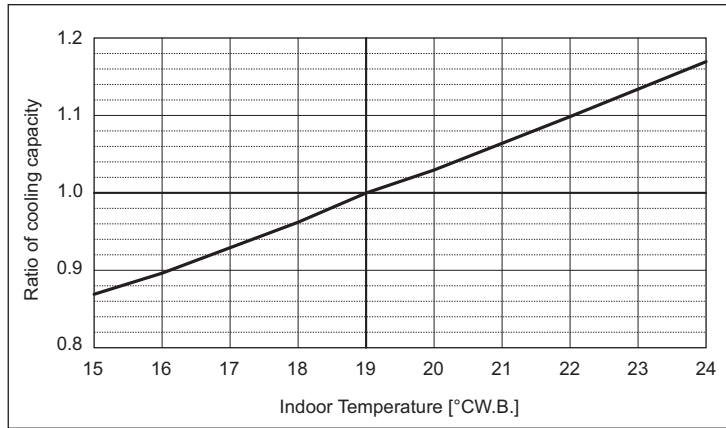


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.


Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

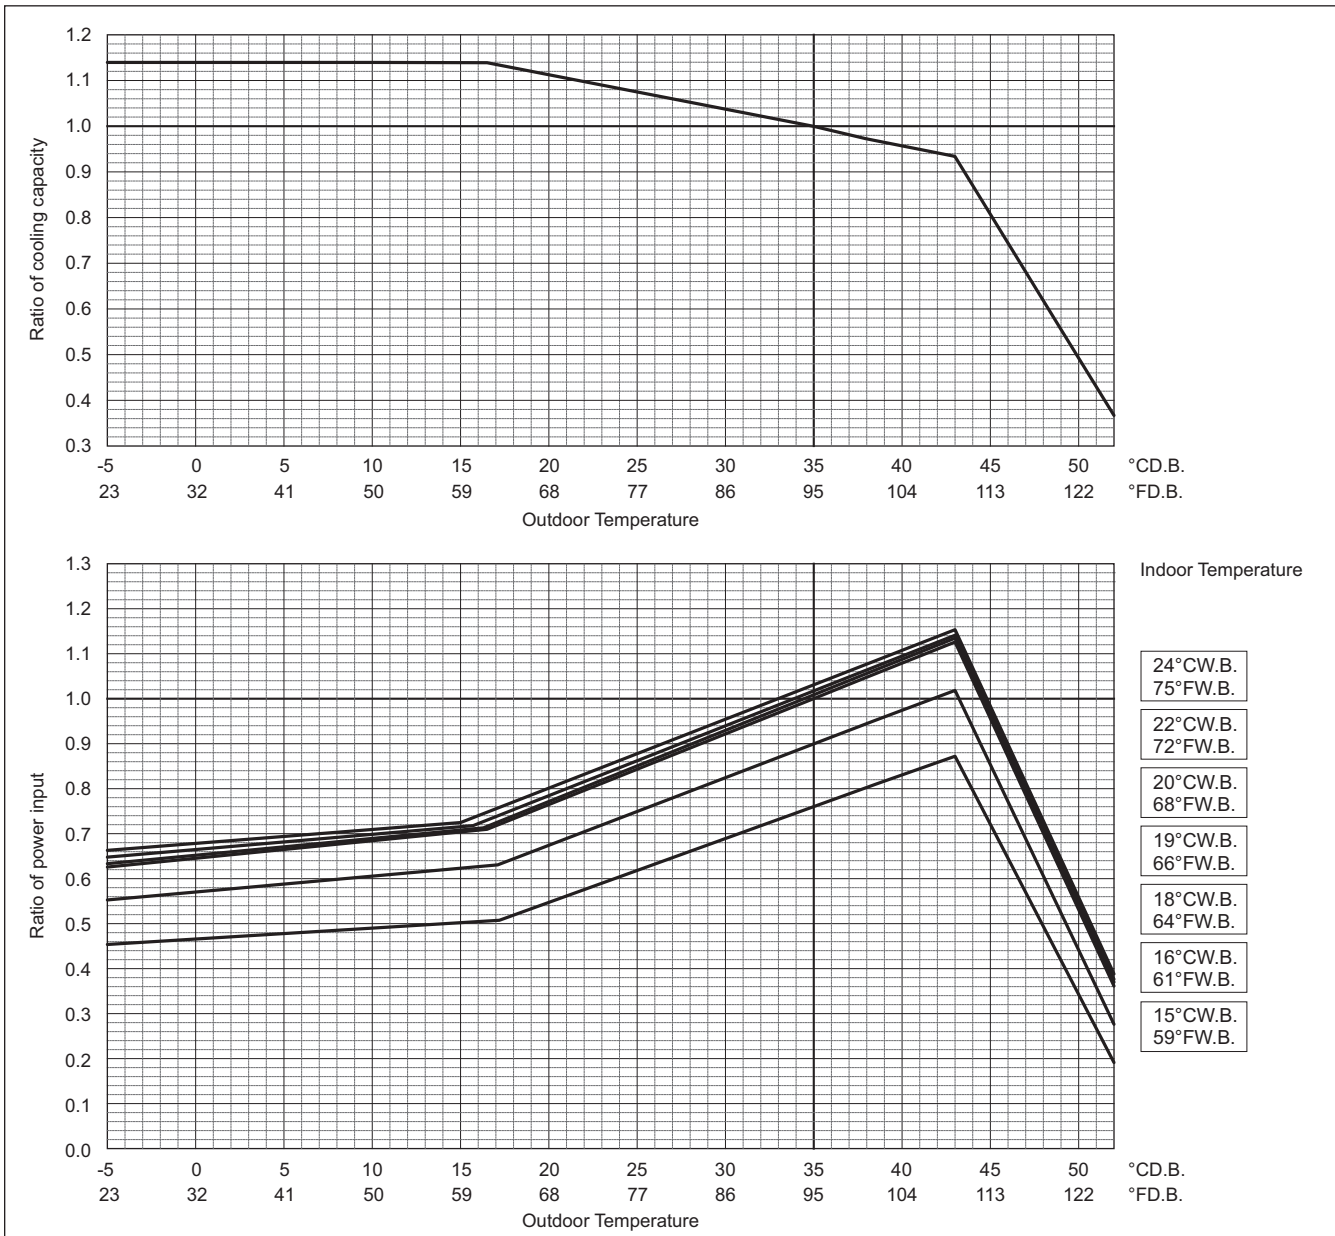

PUHY-	EP700YSLM-A1	EP750YSLM-A1	EP800YSLM-A1
Nominal Heating Capacity	kW 88.0	95.0	100.0
	BTU/h 300,300	324,100	341,200
Input	kW 21.67	23.92	25.18

Indoor unit temperature correction

To be used to correct indoor unit capacity only

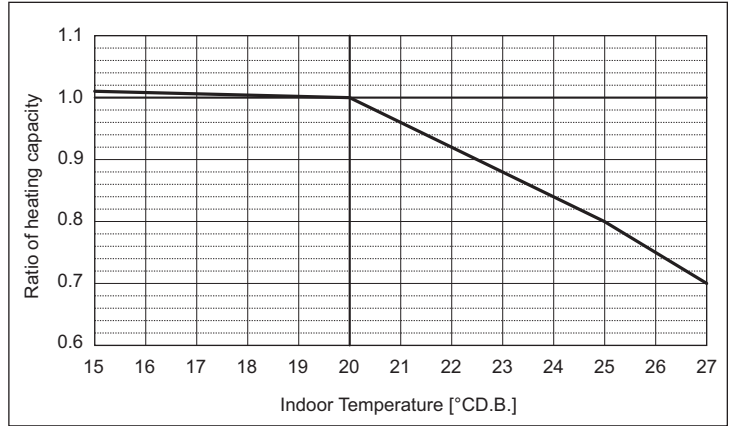


Y (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

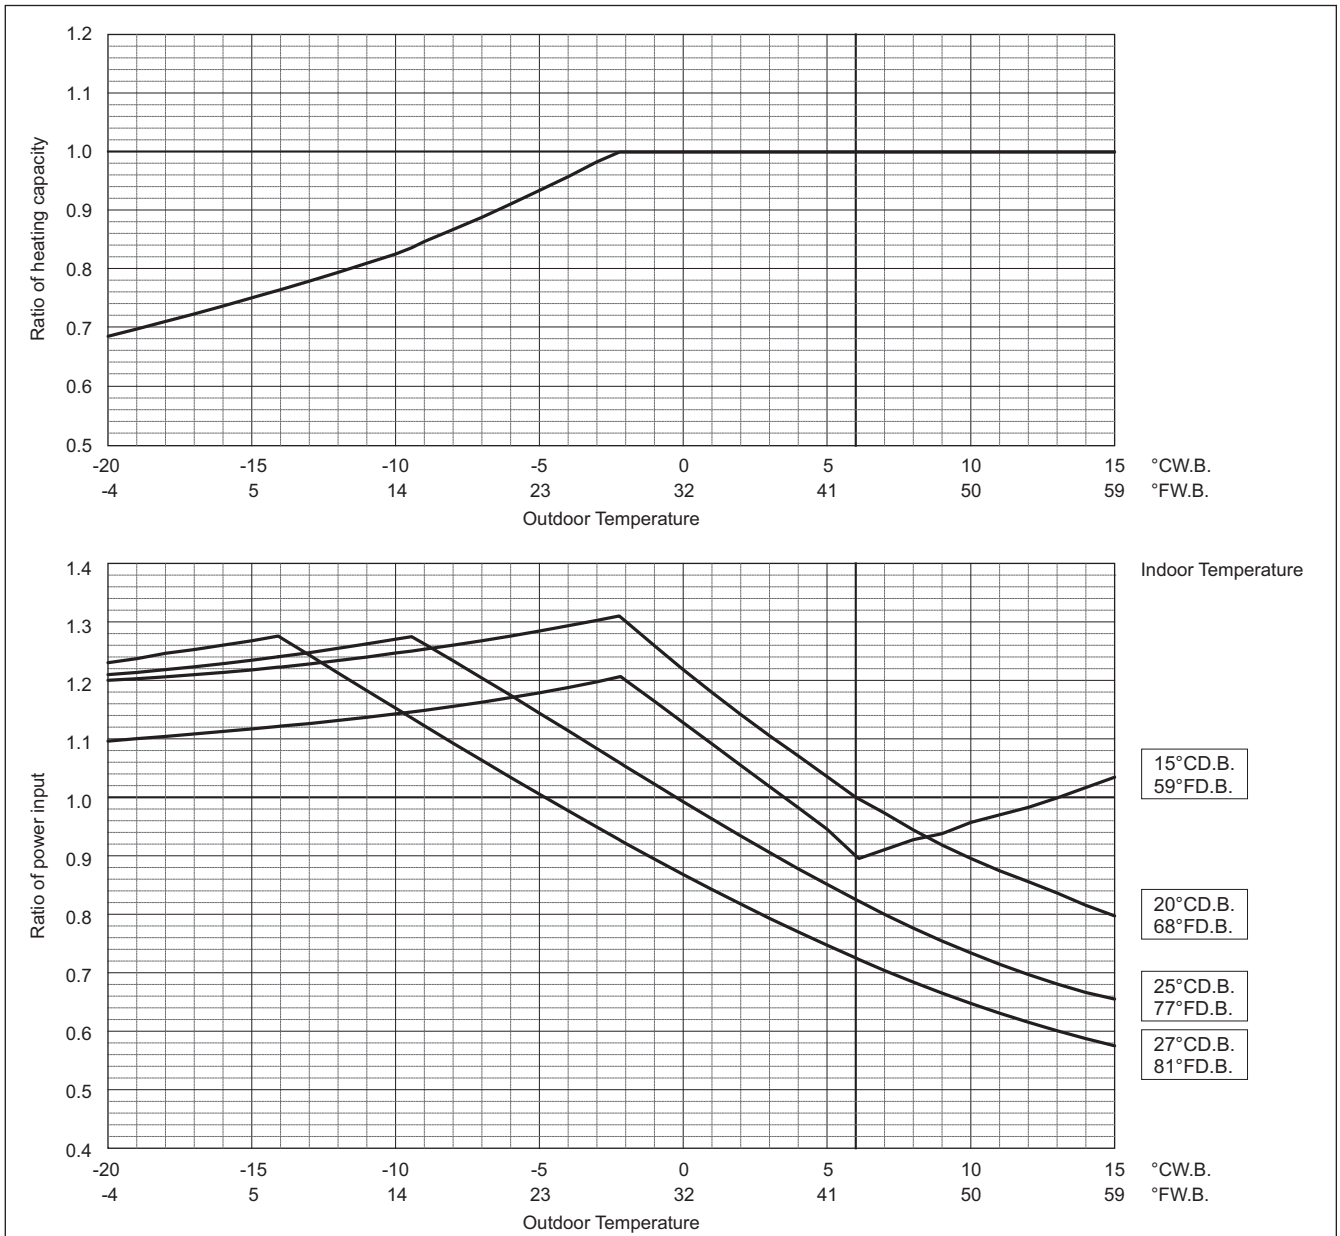

Y (HIGH COP)


PUHY-		EP850YSLM-A1	EP900YSLM-A1	EP950YSLM-A1
Nominal Cooling Capacity	kW	96.0	101.0	108.0
	BTU/h	327,600	344,600	368,500
Input	kW	25.53	27.22	30.33

PUHY-		EP1000YSLM-A1	EP1050YSLM-A1	EP1100YSLM-A1
Nominal Cooling Capacity	kW	113.0	118.0	124.0
	BTU/h	385,600	402,600	423,100
Input	kW	31.04	34.40	38.15

PUHY-		EP1150YSLM-A1	EP1200YSLM-A1	EP1250YSLM-A1
Nominal Cooling Capacity	kW	130.0	136.0	140.0
	BTU/h	443,600	464,000	477,700
Input	kW	41.53	42.76	45.90

PUHY-		EP1300YSLM-A1	EP1350YSLM-A1
Nominal Cooling Capacity	kW	146.0	150.0
	BTU/h	498,200	511,800
Input	kW	46.94	50.0

Indoor unit temperature correction
To be used to correct indoor unit capacity only

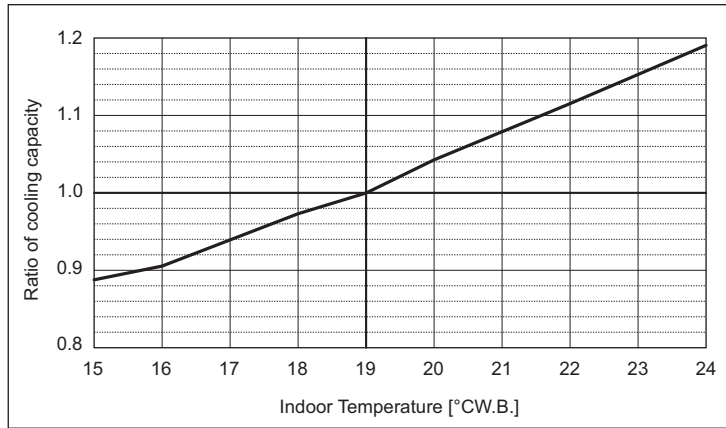


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

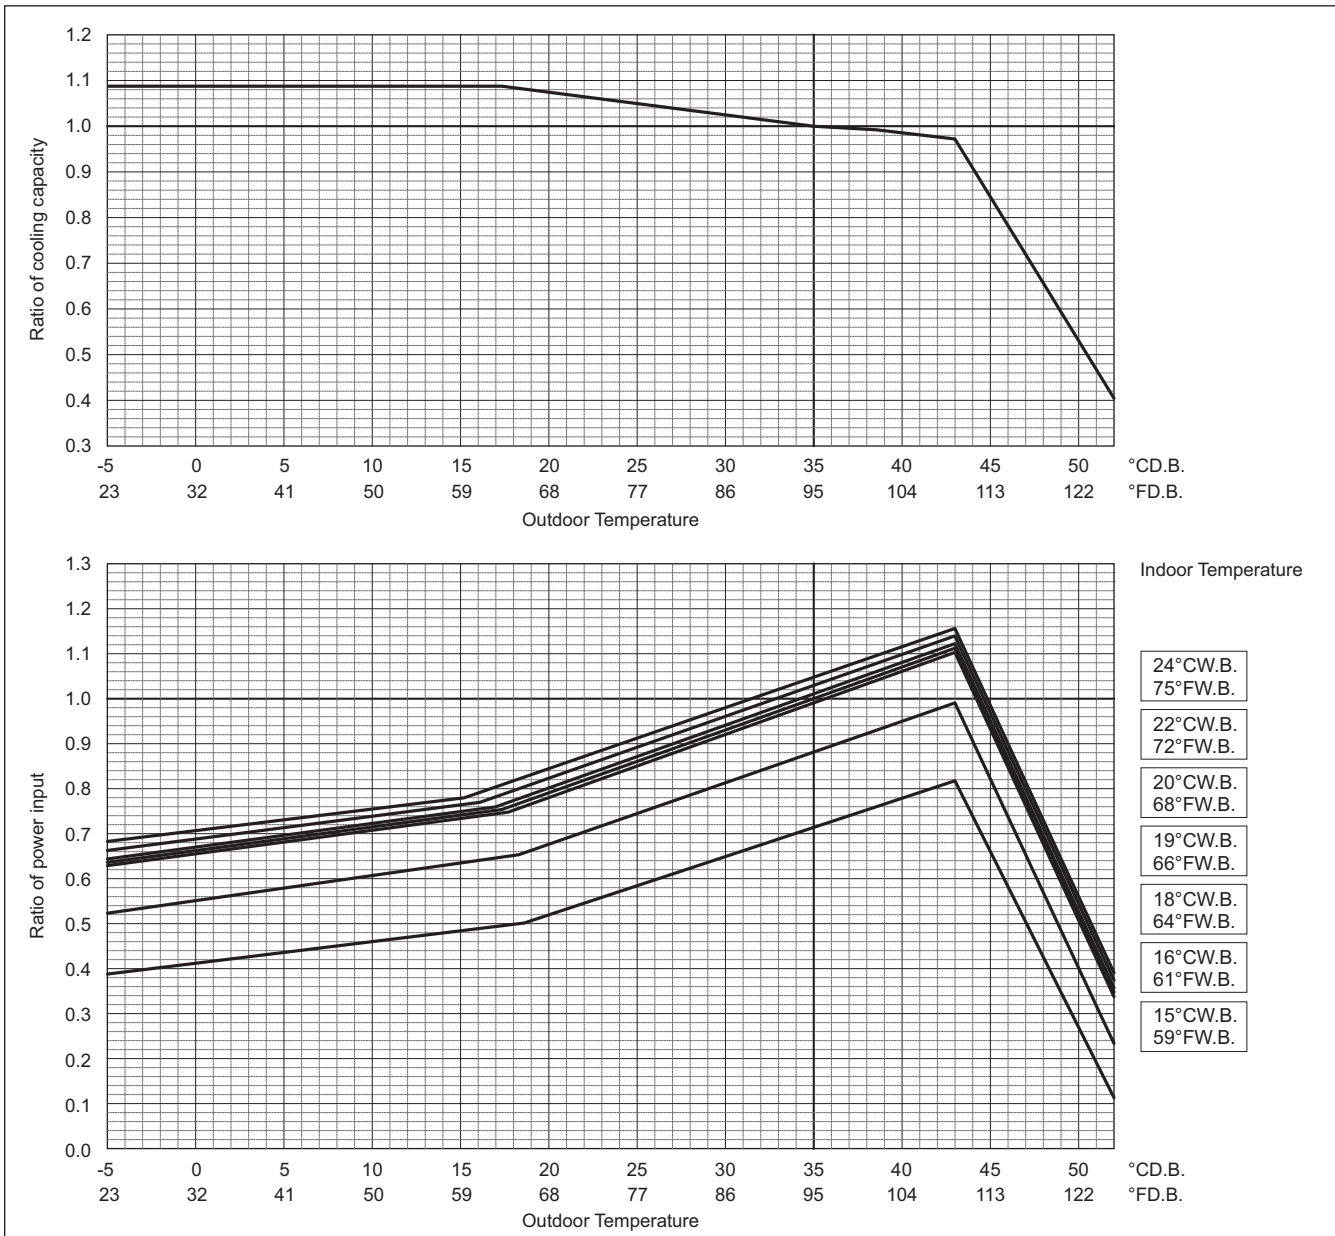


PUHY-	EP850YSLM-A1	EP900YSLM-A1	EP950YSLM-A1
Nominal Heating Capacity	kW 108.0	113.0	119.5
	BTU/h 368,500	385,600	407,700
Input	kW 27.76	29.04	32.03

PUHY-	EP1000YSLM-A1	EP1050YSLM-A1	EP1100YSLM-A1
Nominal Heating Capacity	kW 127.0	132.0	140.0
	BTU/h 433,300	450,400	477,700
Input	kW 33.50	36.87	41.17

PUHY-	EP1150YSLM-A1	EP1200YSLM-A1	EP1250YSLM-A1
Nominal Heating Capacity	kW 145.0	150.0	156.5
	BTU/h 494,700	511,800	534,000
Input	kW 44.47	45.45	49.36

PUHY-	EP1300YSLM-A1	EP1350YSLM-A1
Nominal Heating Capacity	kW 163.0	168.0
	BTU/h 556,200	573,200
Input	kW 50.62	54.36

Indoor unit temperature correction
To be used to correct indoor unit capacity only

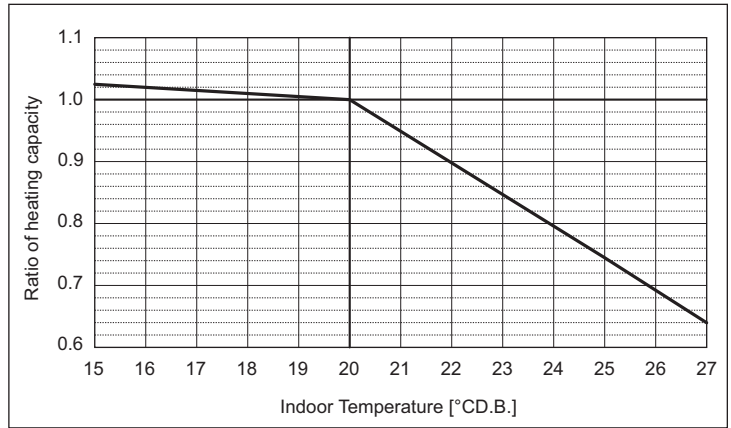


γ (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

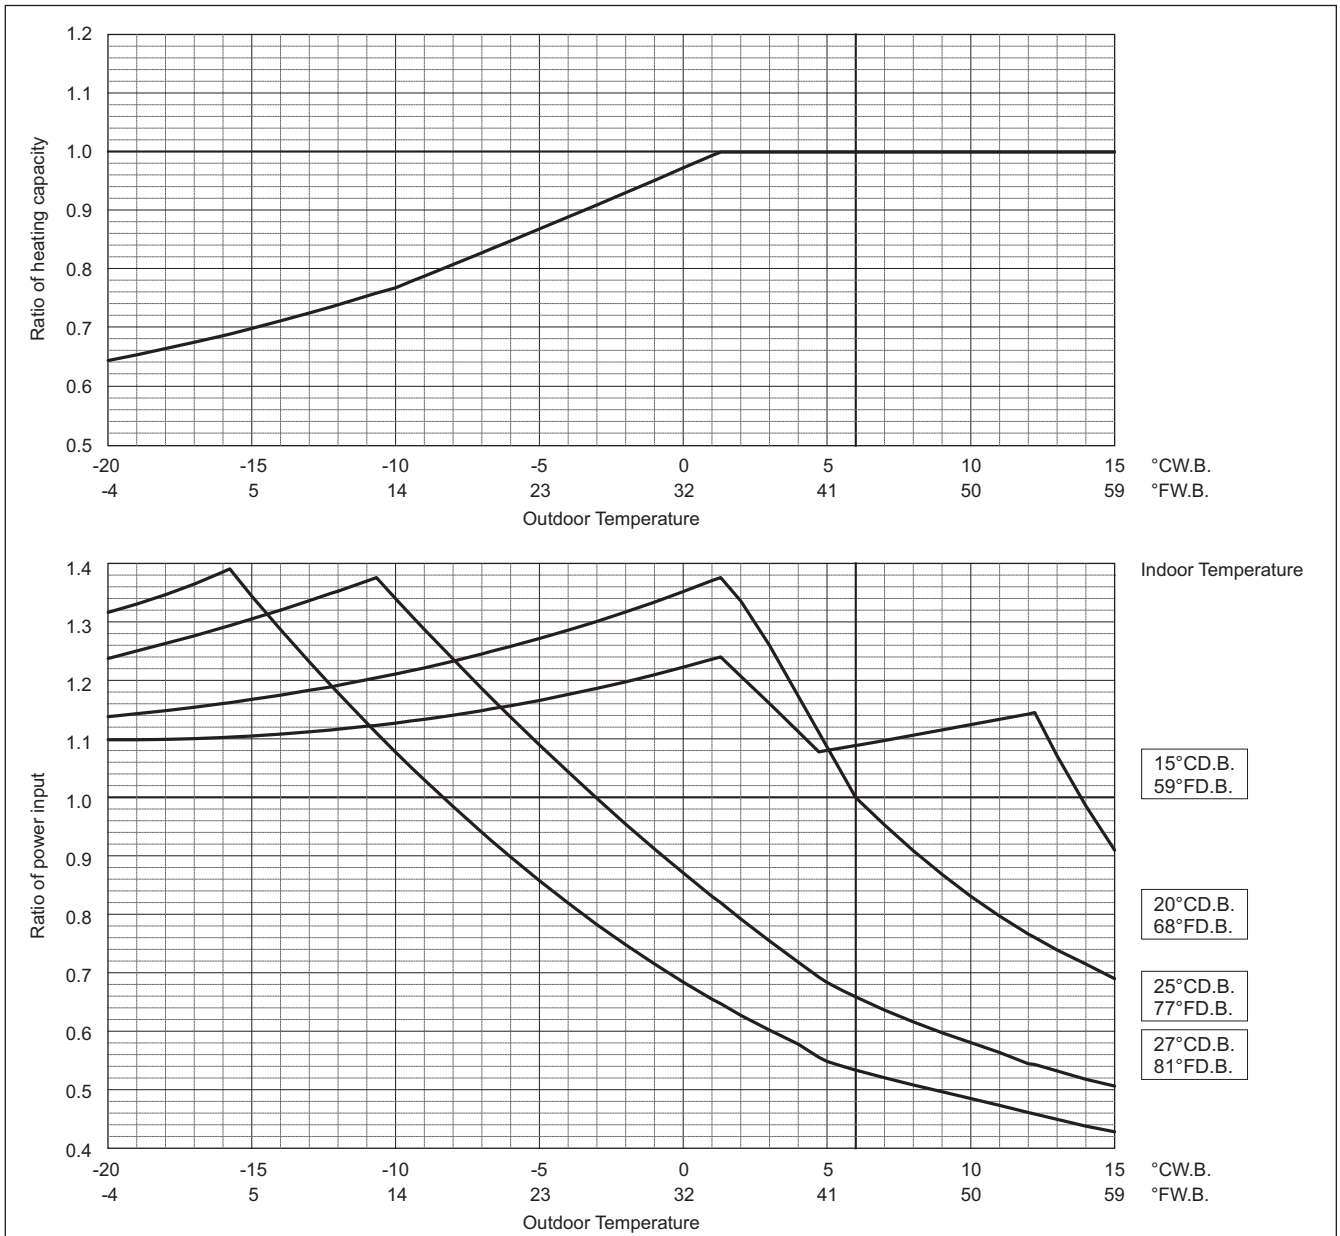


Correction by temperature (COP Priority Mode only for heating)

CITY MULTI could have various capacities at different designing temperatures. Using the nominal cooling/heating capacity values and the ratios below, the capacity can be found for various temperatures. To select COP priority mode, DipSW 6-2 must be set to ON.

PUHY-	EP200YLM-A1	EP250YLM-A1
Nominal Cooling Capacity		
kW	22.4	28.0
BTU/h	76,400	95,500
Input		
kW	5.19	6.89

Indoor unit temperature correction

To be used to correct indoor unit capacity only

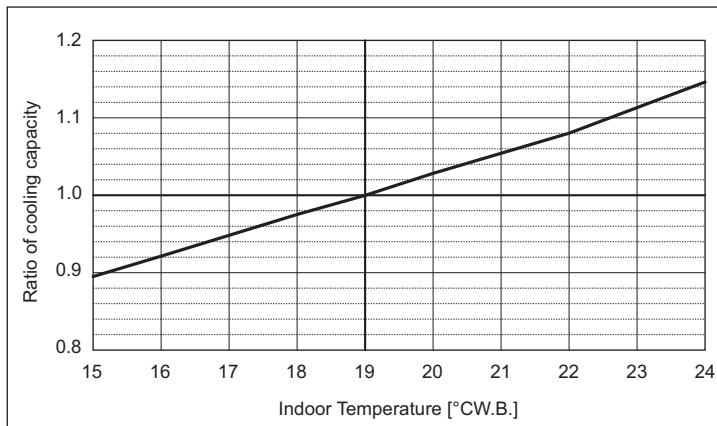


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

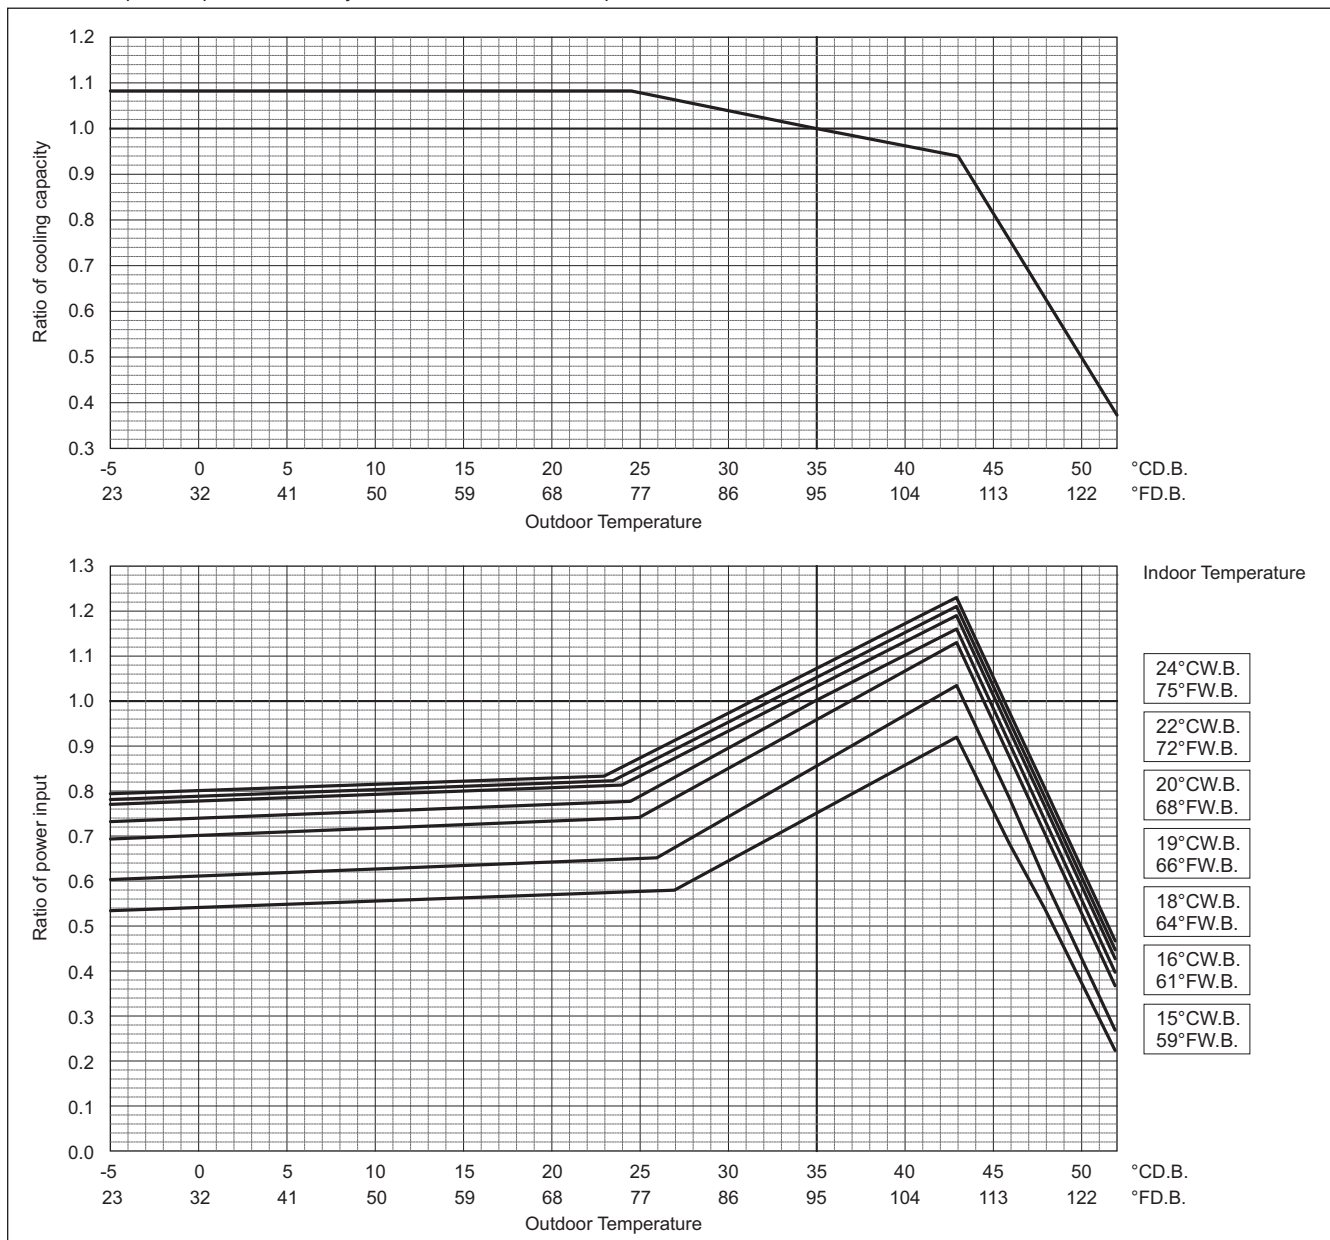


Y (HIGH COP)

COP Priority Mode

PUHY-		EP200YLM-A1	EP250YLM-A1
Nominal Heating Capacity	kW	25.0	31.5
	BTU/h	85,300	107,500
Input	kW	5.73	7.68

Indoor unit temperature correction

To be used to correct indoor unit capacity only

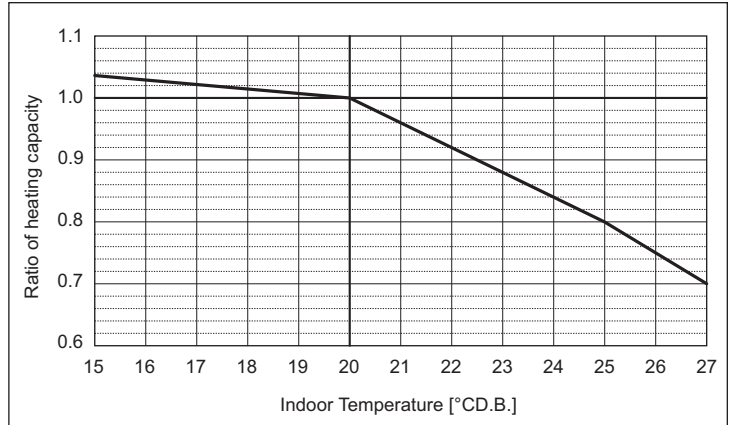


γ (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.


Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

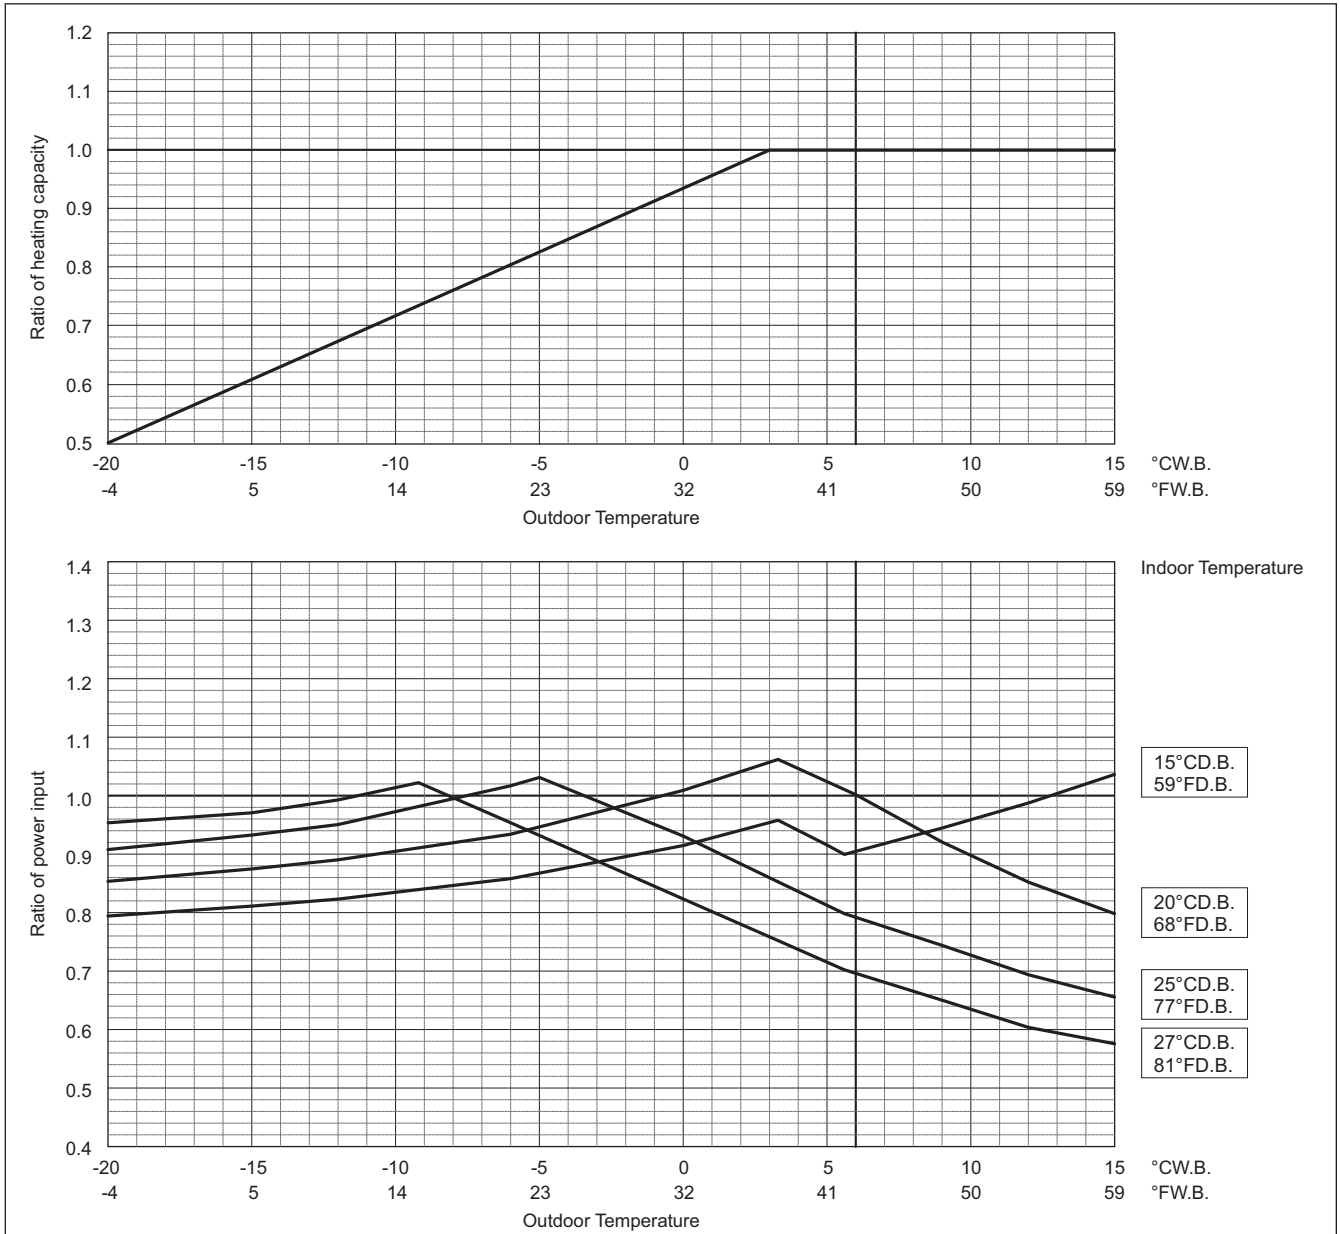

PUHY-	EP300YLM-A1	EP350YLM-A1
Nominal Cooling Capacity	kW 33.5	40.0
	BTU/h 114,300	136,500
Input	kW 8.56	11.69

Indoor unit temperature correction

To be used to correct indoor unit capacity only

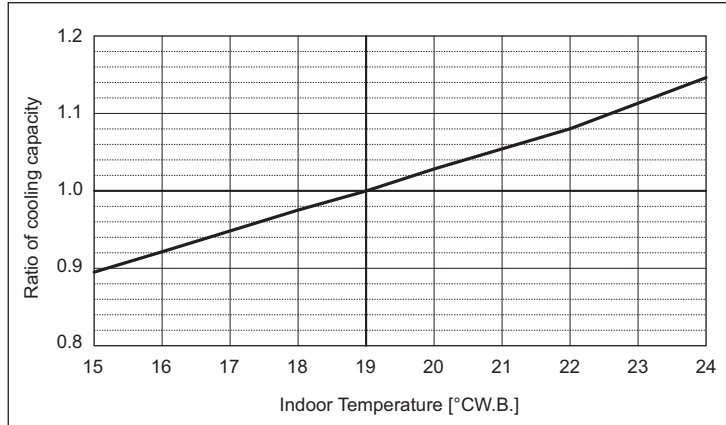


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

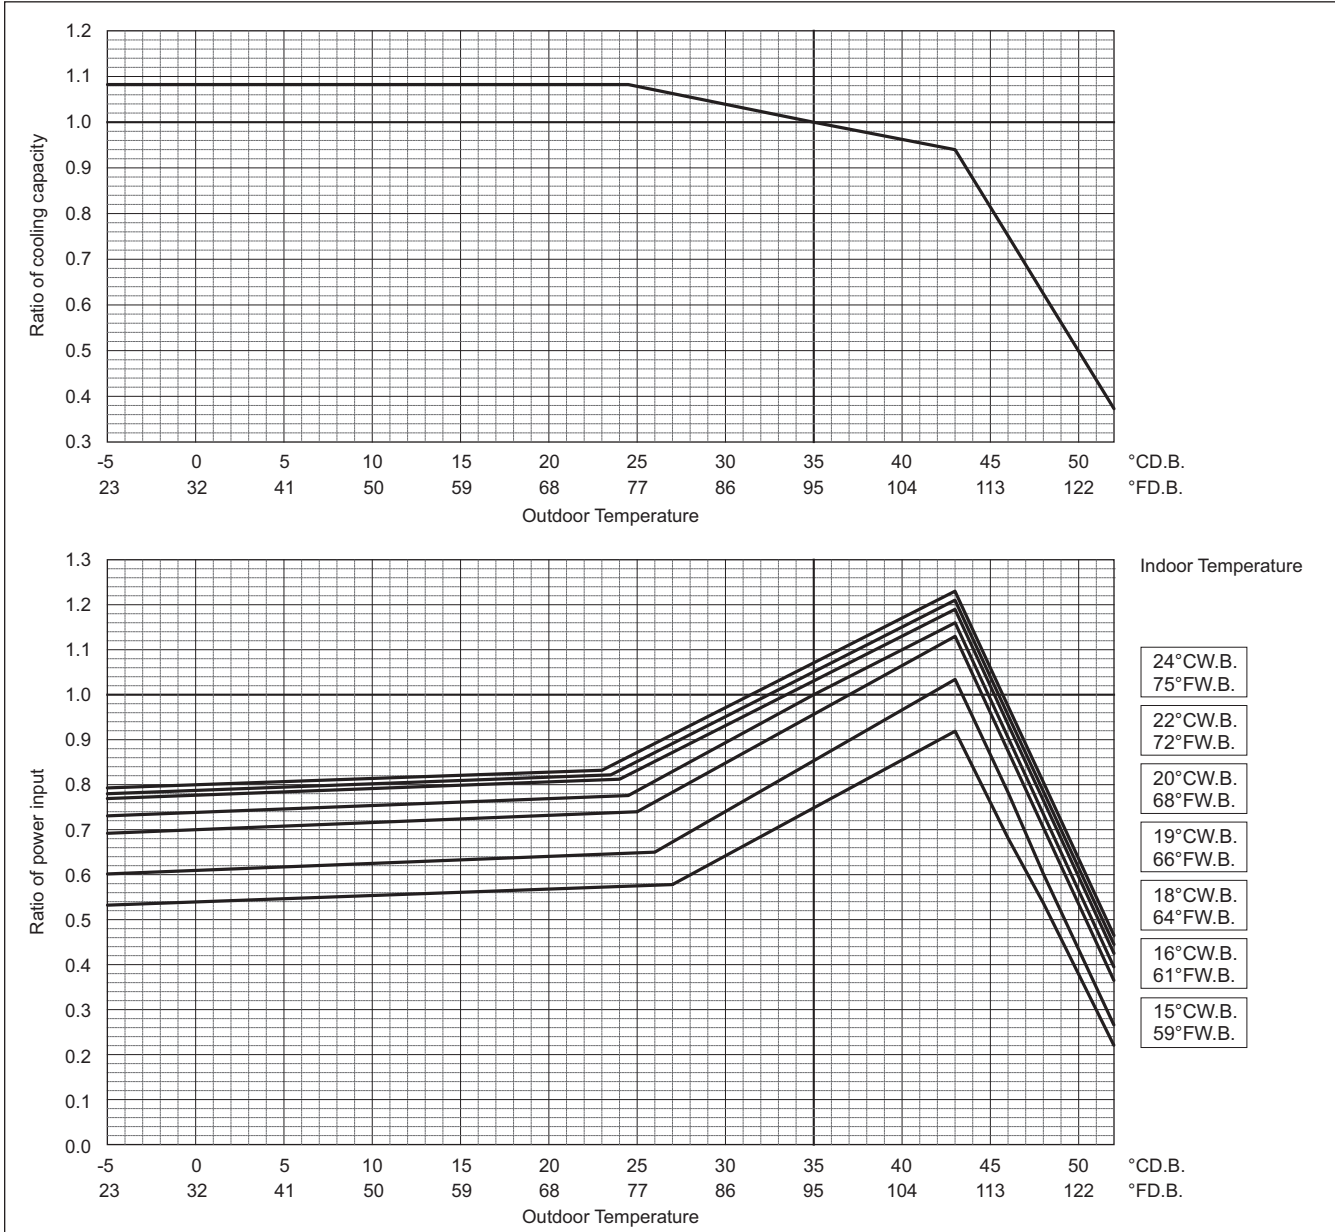


COP Priority Mode

PUHY-		EP300YLM-A1	EP350YLM-A1
Nominal Heating Capacity	kW	37.5	45.0
	BTU/h	128,000	153,500
Input	kW	9.16	12.53

Indoor unit temperature correction

To be used to correct indoor unit capacity only

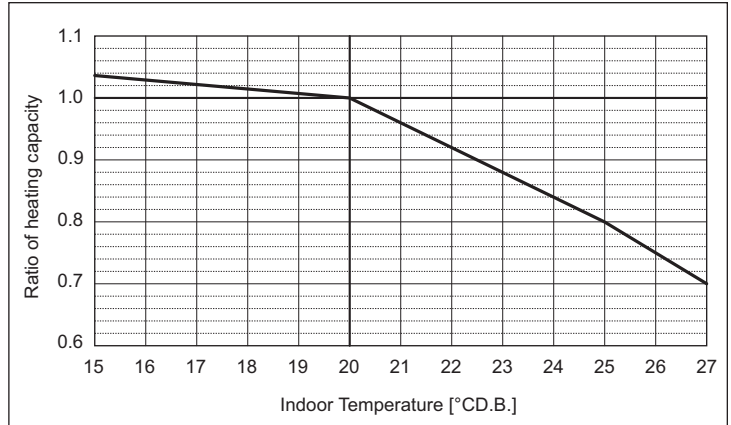


γ (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only


Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

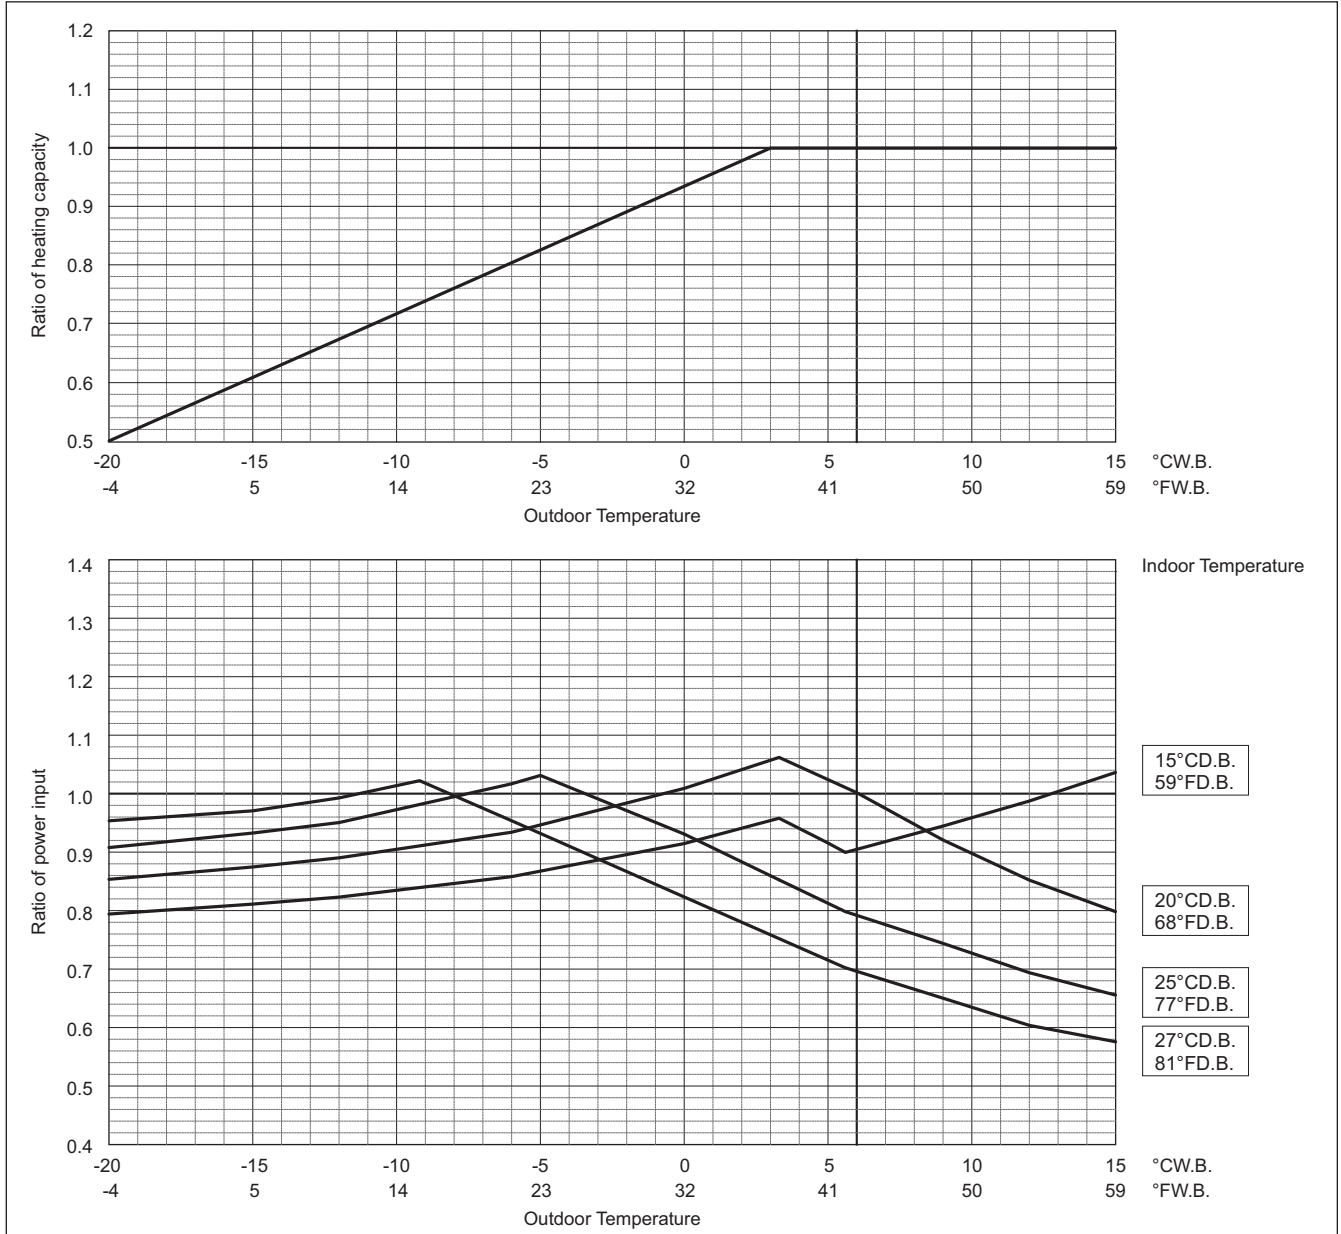

PUHY-	EP400YLM-A1	EP450YLM-A1	EP500YLM-A1
Nominal Cooling Capacity	kW 45.0	50.0	56.0
	BTU/h 153,500	170,600	191,100
Input	kW 12.26	14.79	18.72

Indoor unit temperature correction
To be used to correct indoor unit capacity only

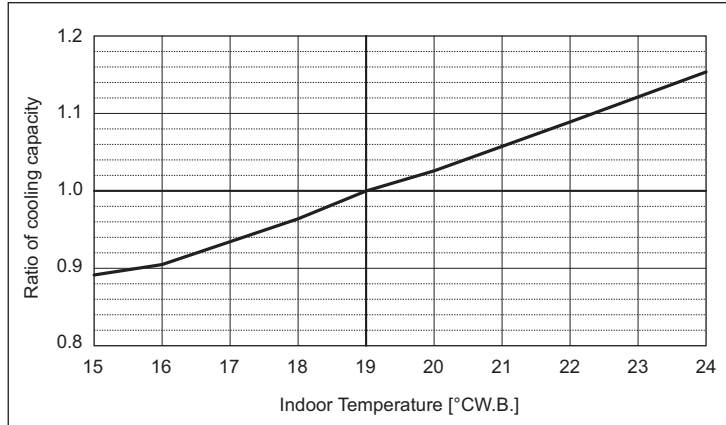


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

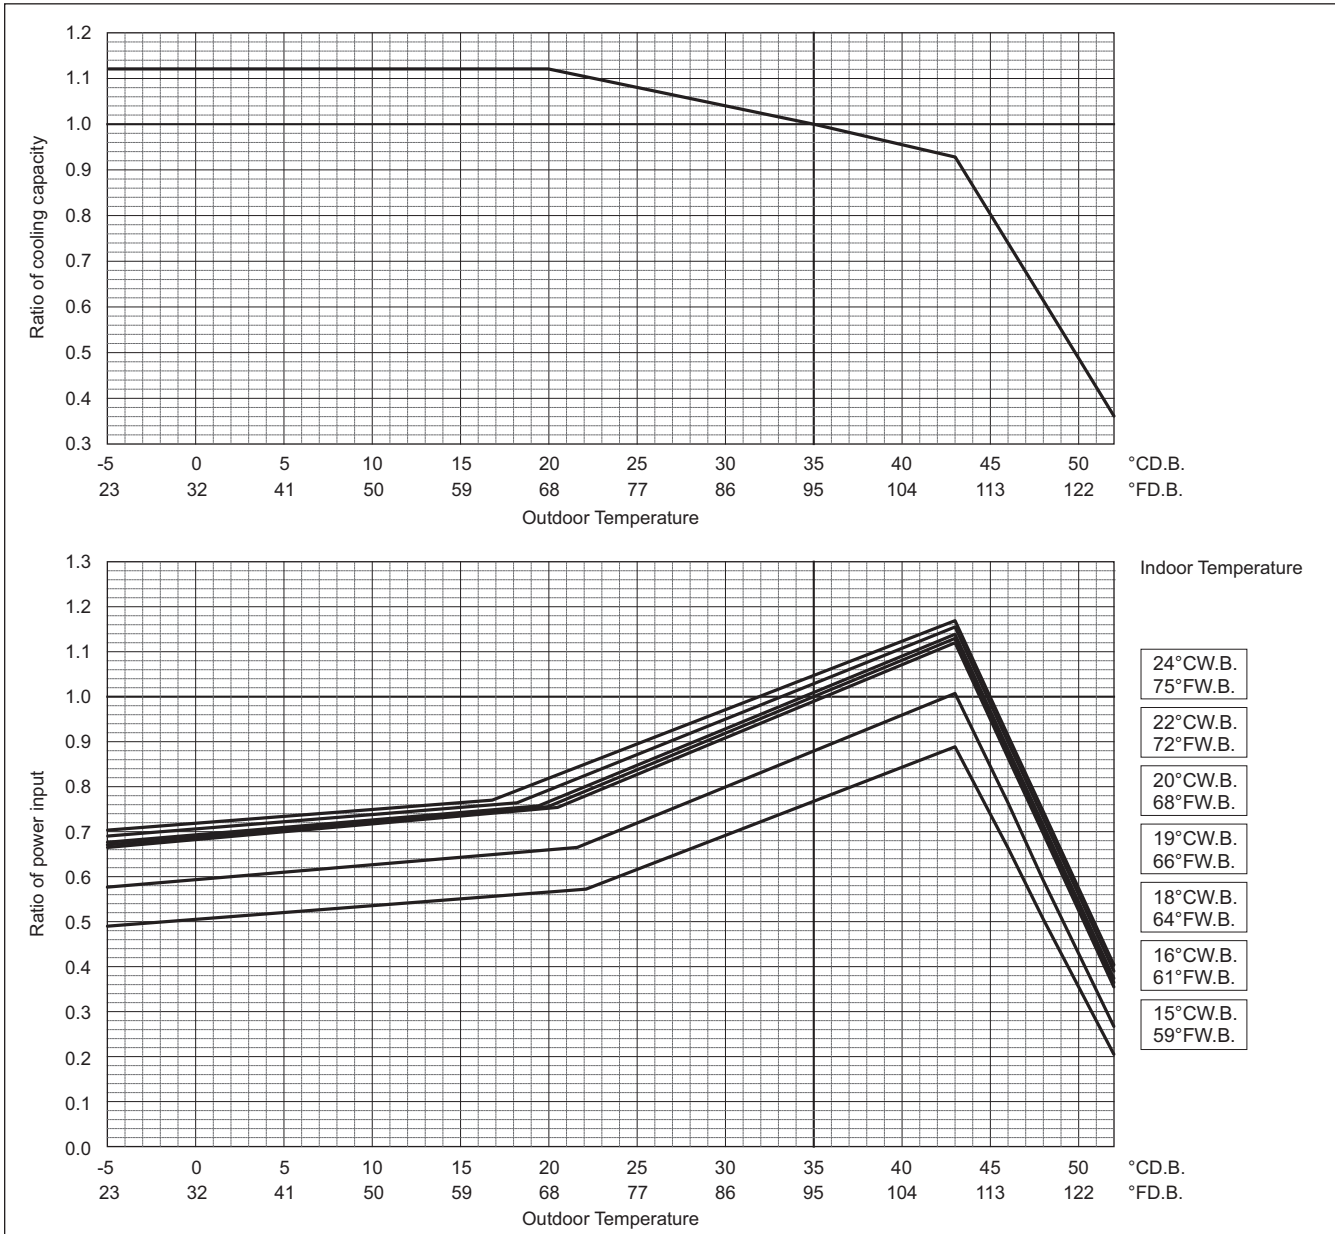


Y (HIGH COP)

COP Priority Mode

PUHY-	EP400YLM-A1	EP450YLM-A1	EP500YLM-A1
Nominal Heating Capacity	kW 50.0	56.0	63.0
	BTU/h 170,600	191,100	215,000
Input	kW 13.15	16.09	19.68

Indoor unit temperature correction

To be used to correct indoor unit capacity only

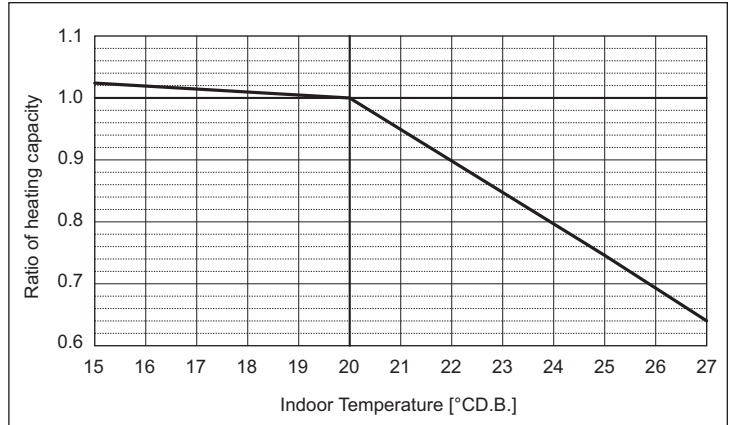


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

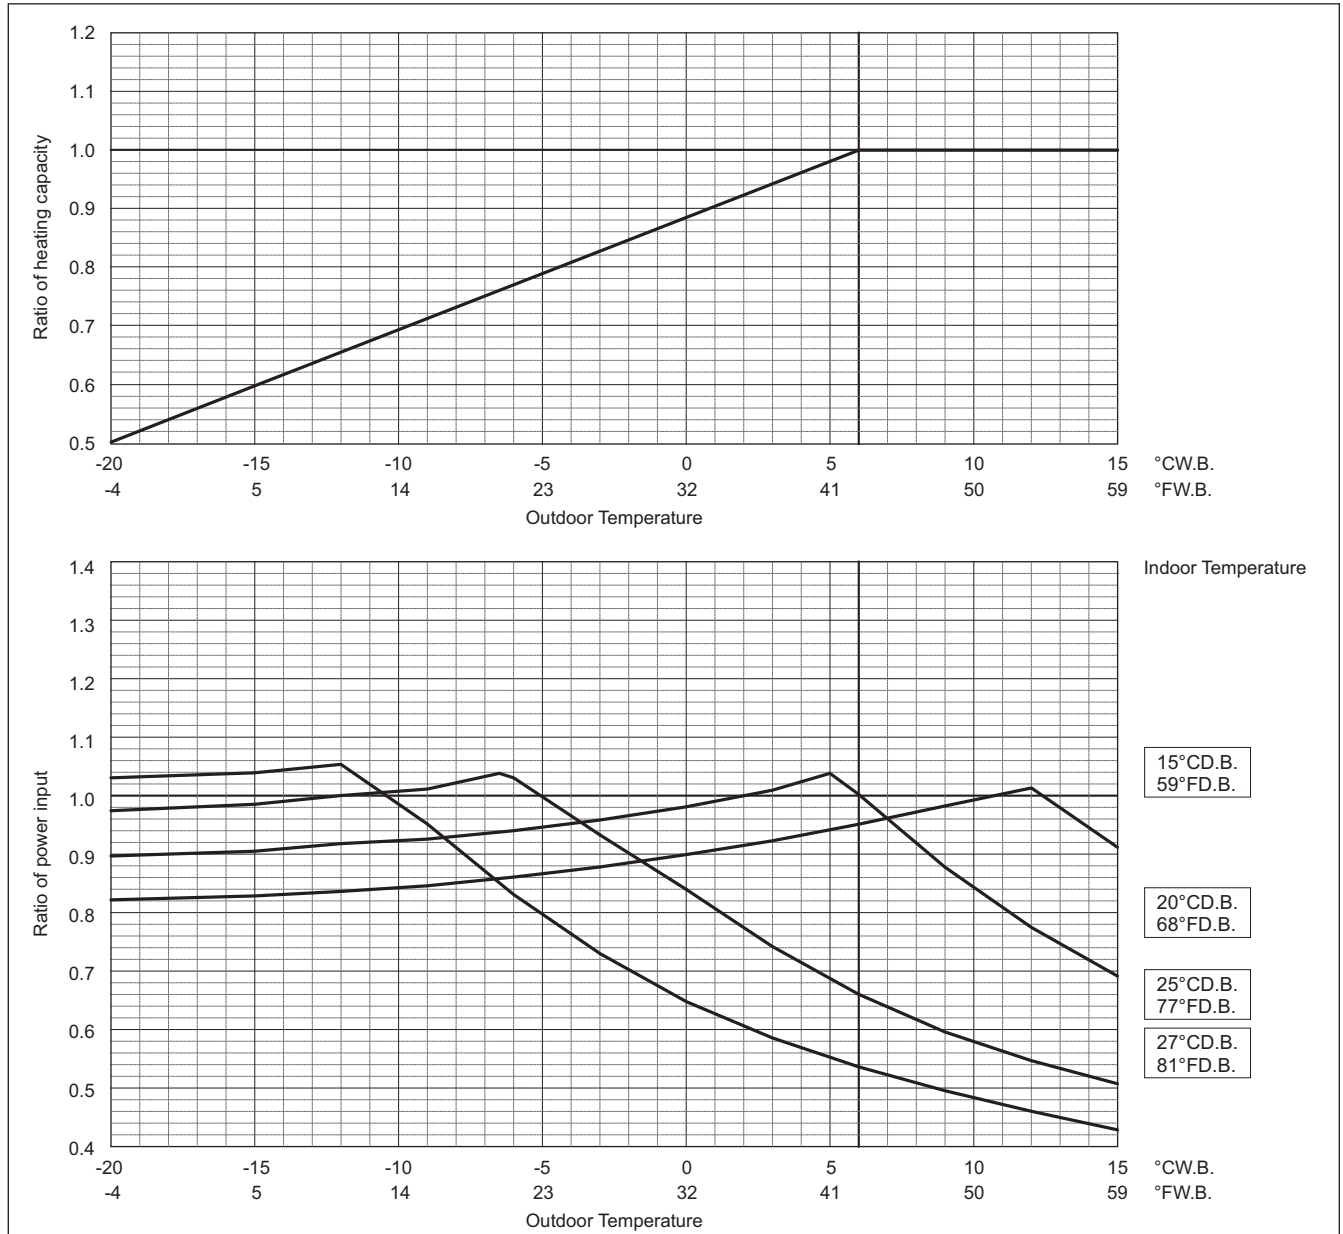


Y (HIGH COP)

PUHY-	EP550YSLM-A1	EP600YSLM-A1	EP650YSLM-A1
Nominal Cooling Capacity	63.0	69.0	73.0
Input	16.62	18.59	18.15

Indoor unit temperature correction

To be used to correct indoor unit capacity only

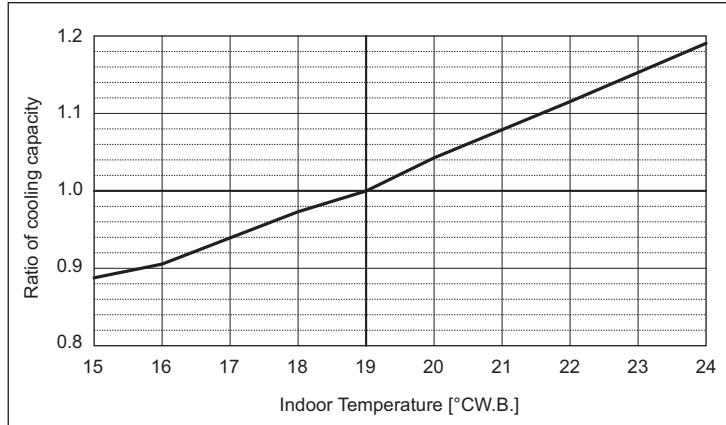


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

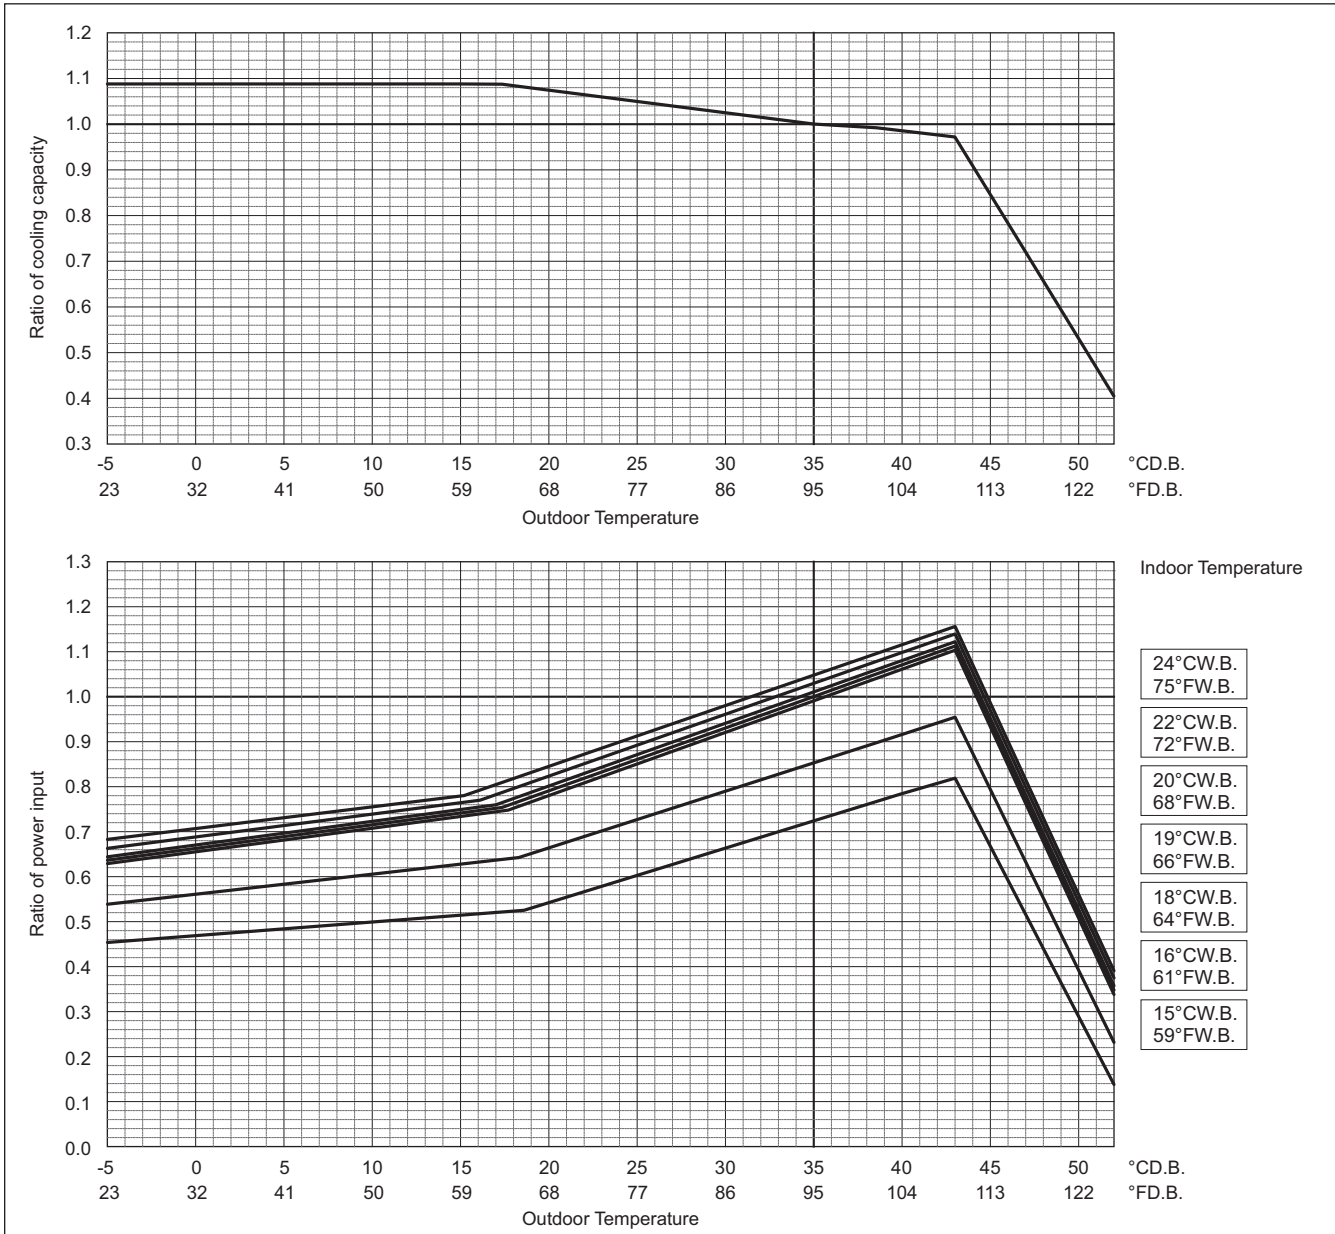


COP Priority Mode

PUHY-	EP550YSLM-A1	EP600YSLM-A1	EP650YSLM-A1
Nominal Heating Capacity	kW 69.0	76.5	81.5
	BTU/h 235,400	261,000	278,100
Input	kW 17.73	19.66	20.07

Indoor unit temperature correction

To be used to correct indoor unit capacity only

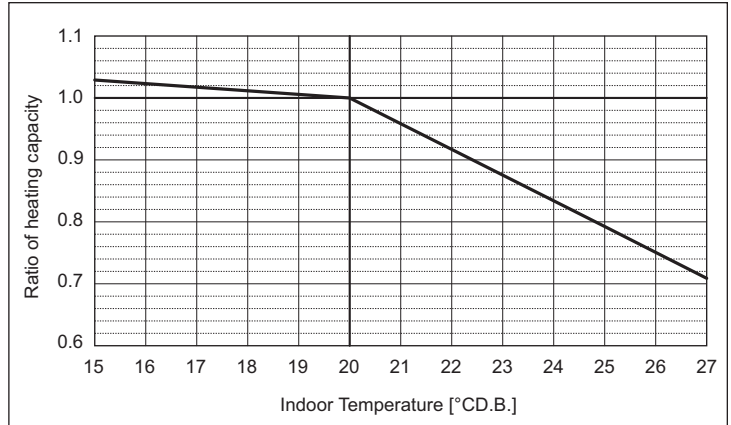


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.


Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

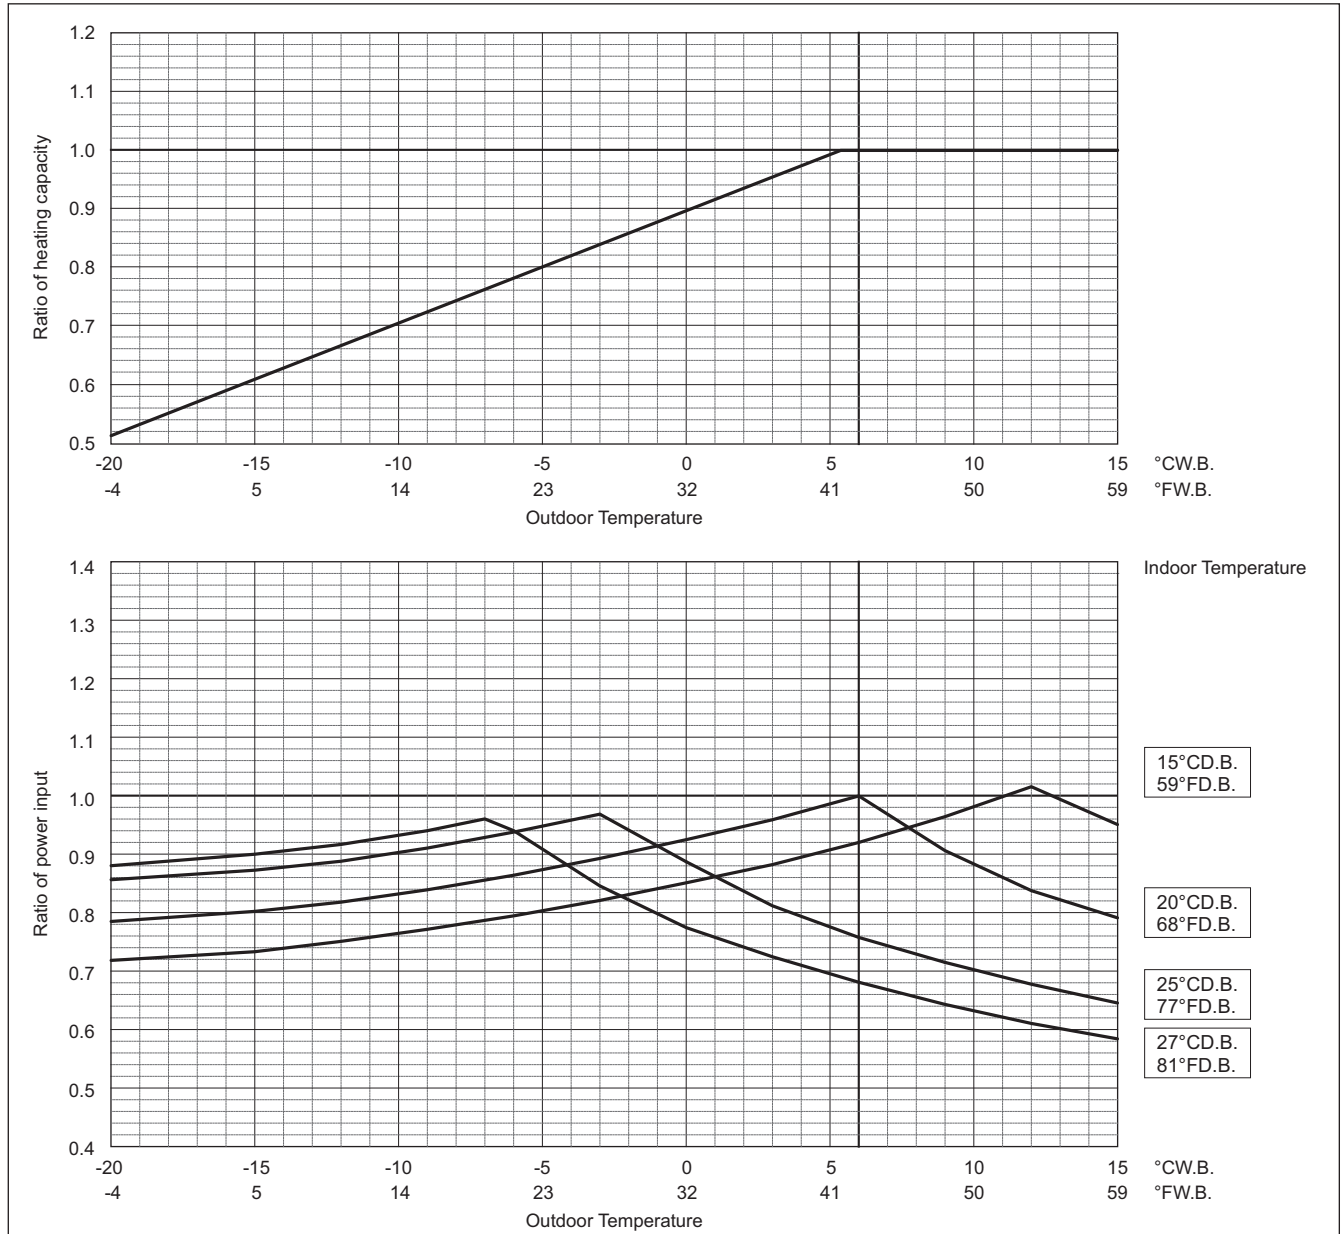

γ (HIGH COP)

PUHY-	EP700YSLM-A1	EP750YSLM-A1	EP800YSLM-A1
Nominal Cooling Capacity	80.0	85.0	90.0
Input	20.15	21.85	23.43

Indoor unit temperature correction
To be used to correct indoor unit capacity only

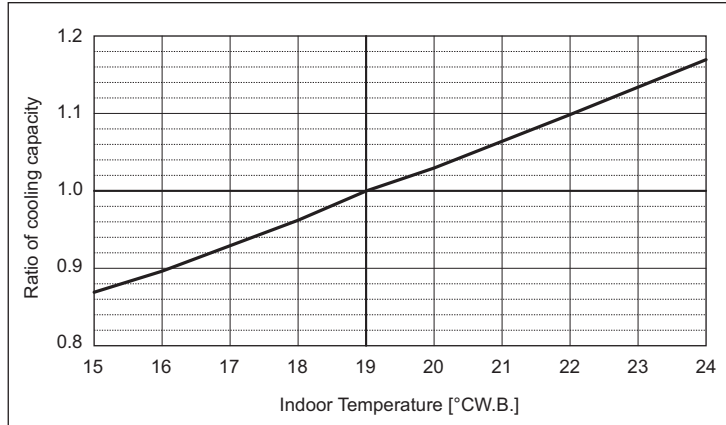


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

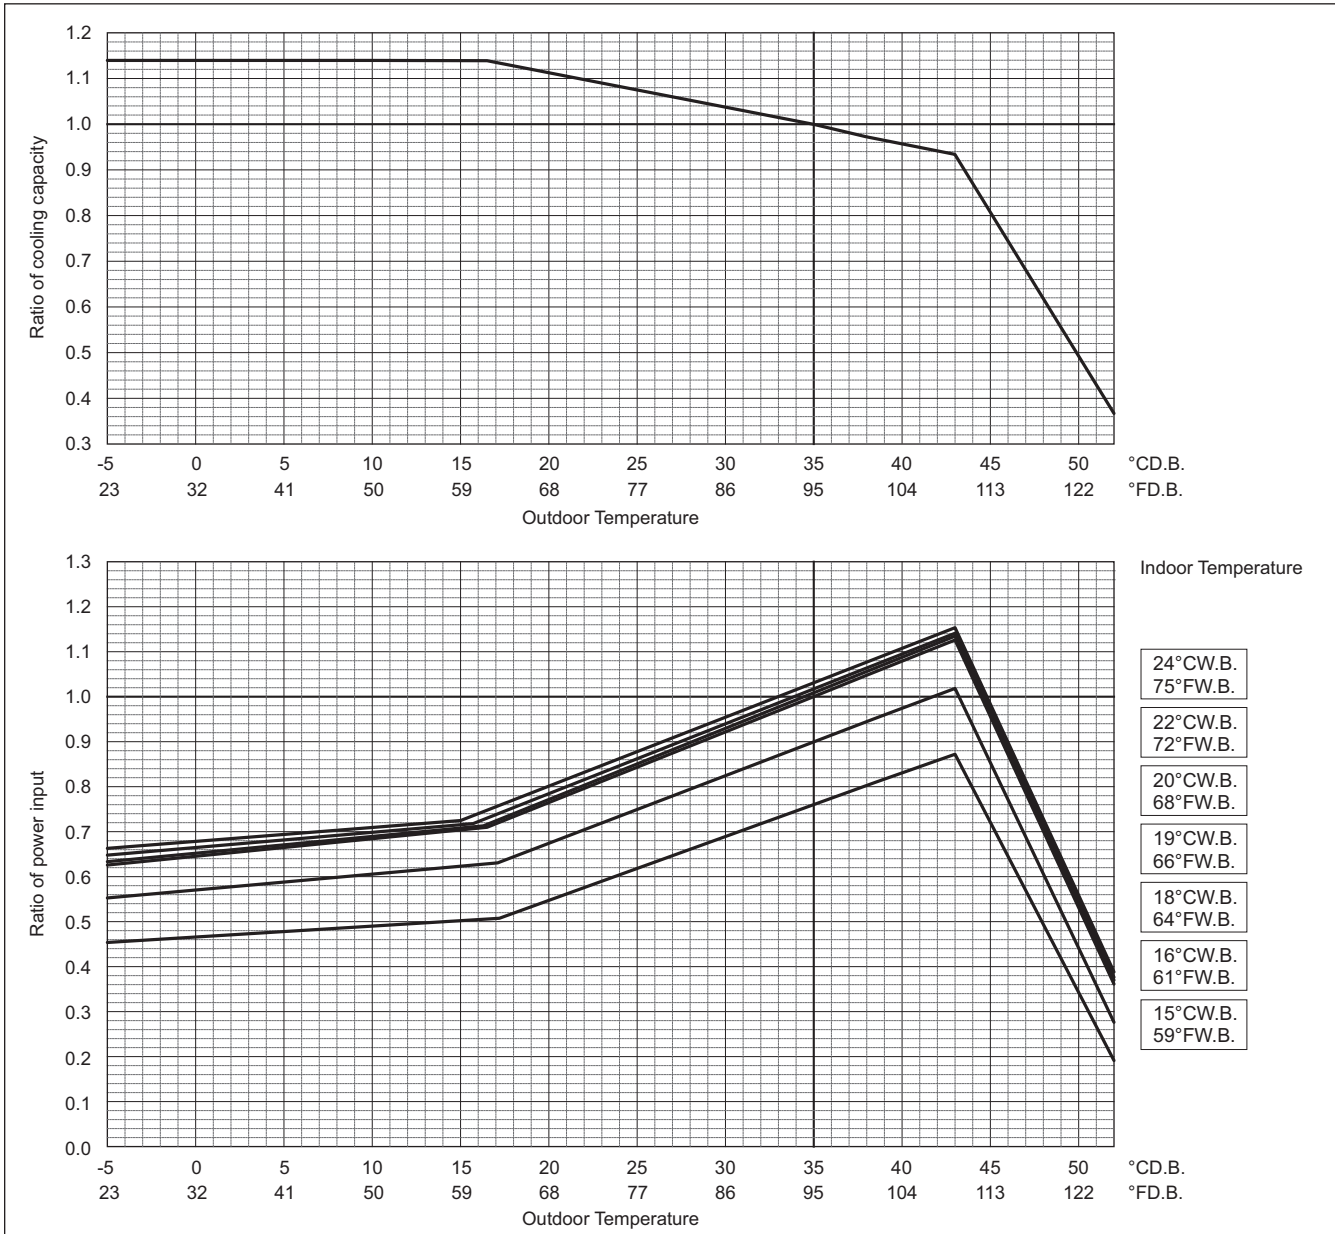


Y (HIGH COP)

COP Priority Mode

PUHY-	EP700YSLM-A1	EP750YSLM-A1	EP800YSLM-A1
Nominal Heating Capacity	kW 88.0	95.0	100.0
	BTU/h 300,300	324,100	341,200
Input	kW 21.67	23.92	25.18

Indoor unit temperature correction

To be used to correct indoor unit capacity only

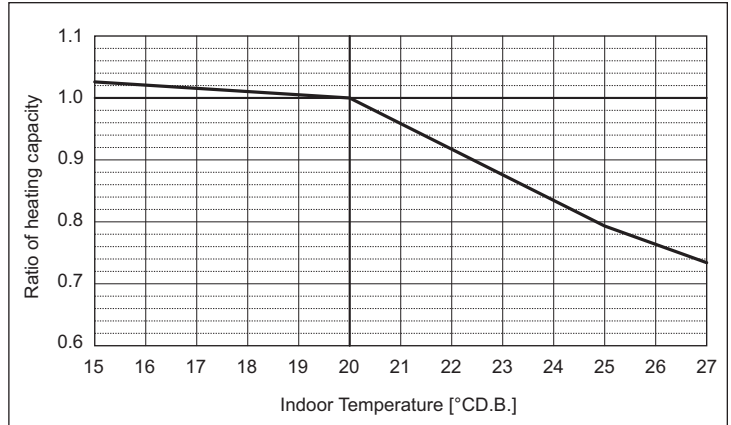


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

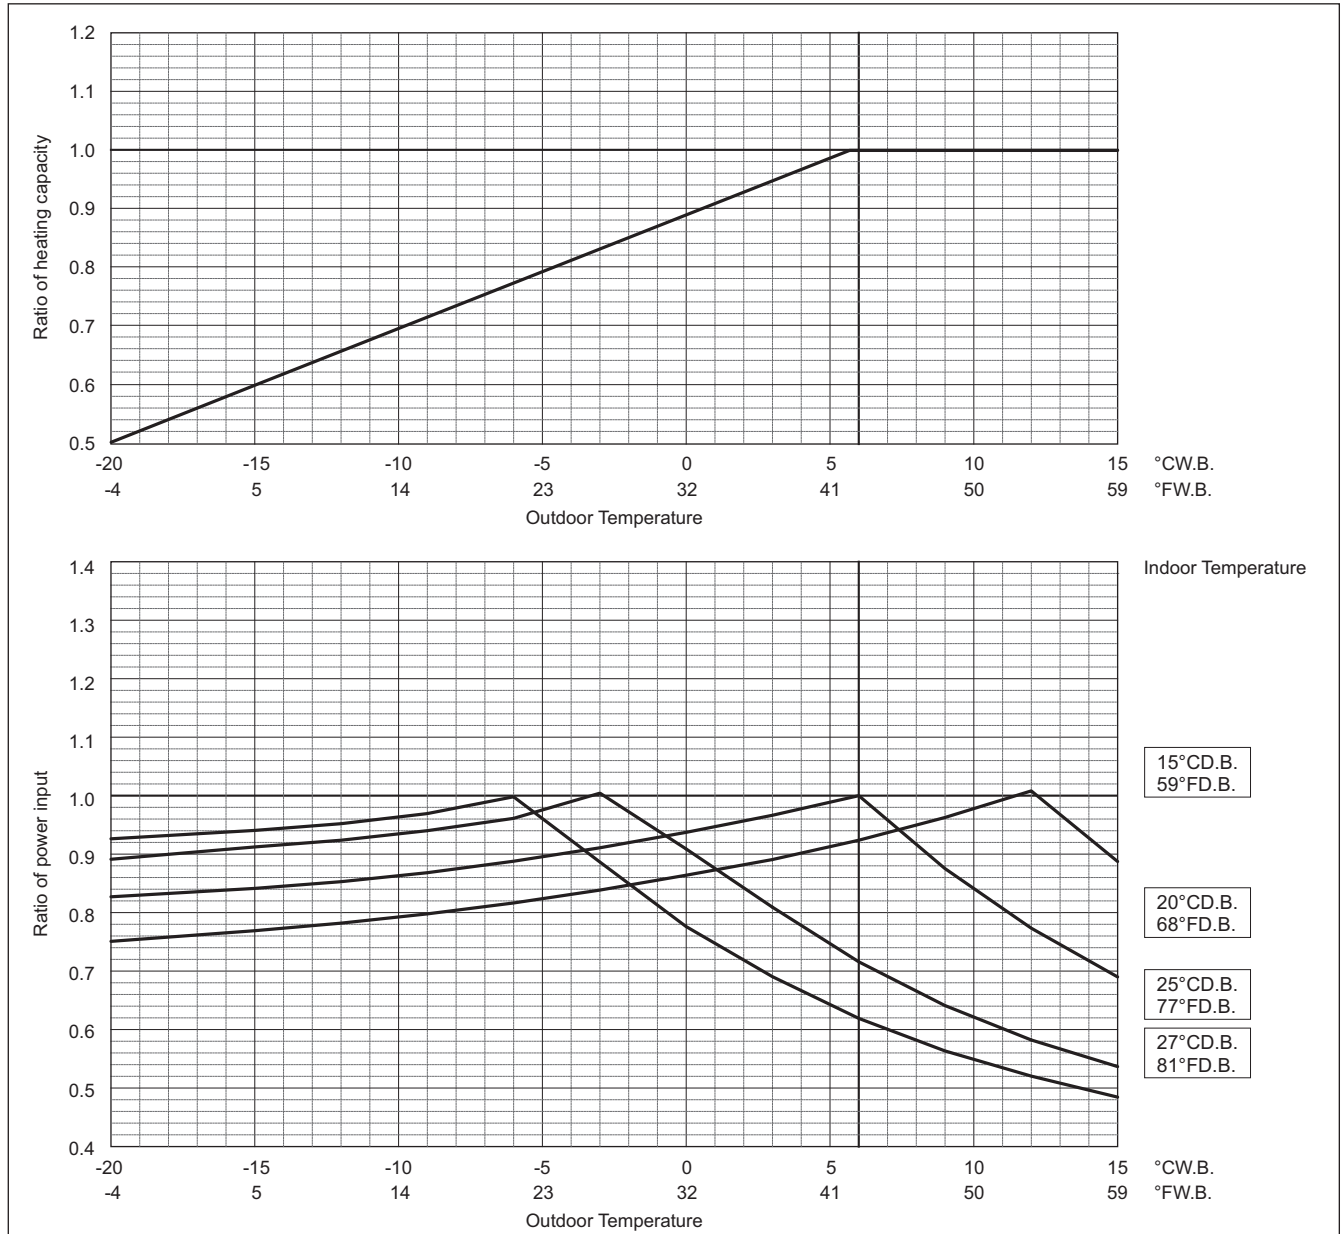

Y (HIGH COP)

Y (HIGH COP)


PUHY-		EP850YSLM-A1	EP900YSLM-A1	EP950YSLM-A1
Nominal Cooling Capacity	kW	96.0	101.0	108.0
	BTU/h	327,600	344,600	368,500
Input	kW	25.53	27.22	30.33

PUHY-		EP1000YSLM-A1	EP1050YSLM-A1	EP1100YSLM-A1
Nominal Cooling Capacity	kW	113.0	118.0	124.0
	BTU/h	385,600	402,600	423,100
Input	kW	31.04	34.40	38.15

PUHY-		EP1150YSLM-A1	EP1200YSLM-A1	EP1250YSLM-A1
Nominal Cooling Capacity	kW	130.0	136.0	140.0
	BTU/h	443,600	464,000	477,700
Input	kW	41.53	42.76	45.90

PUHY-		EP1300YSLM-A1	EP1350YSLM-A1
Nominal Cooling Capacity	kW	146.0	150.0
	BTU/h	498,200	511,800
Input	kW	46.94	50.0

Indoor unit temperature correction
To be used to correct indoor unit capacity only

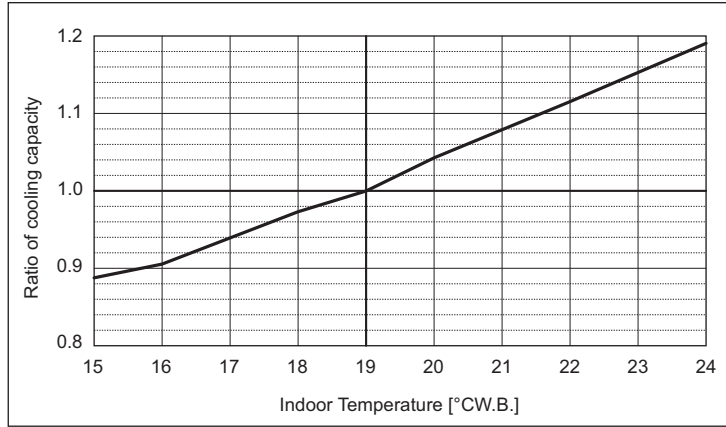


Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

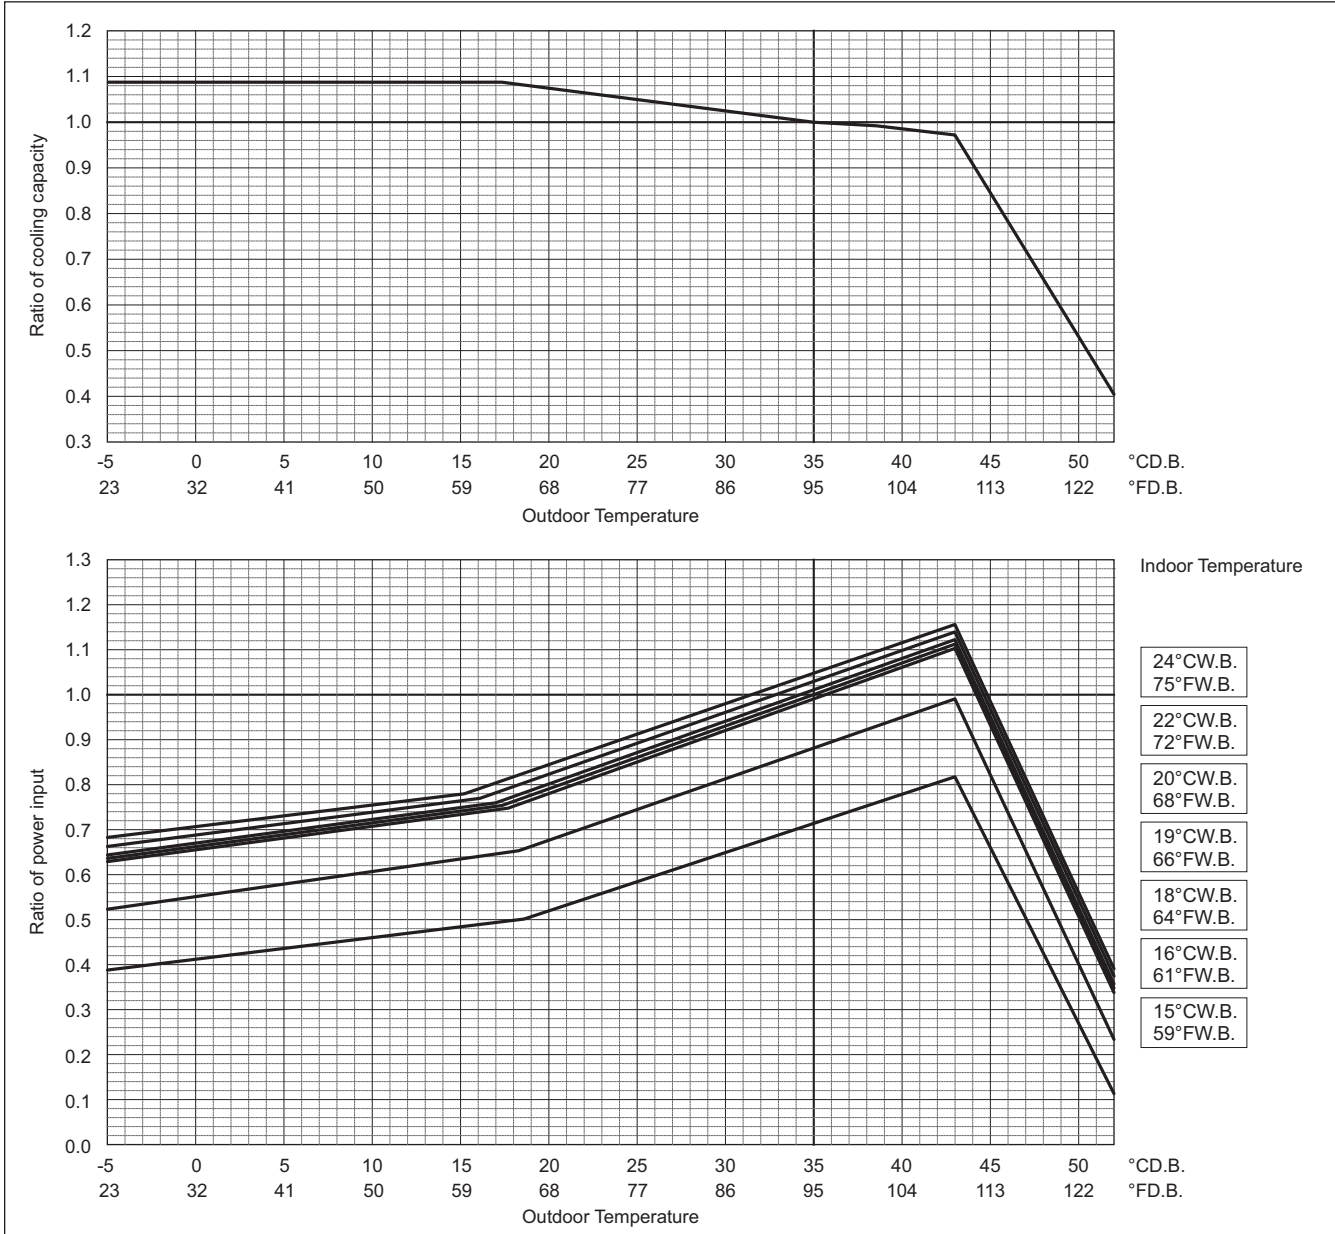

COP Priority Mode

PUHY-		EP850YSLM-A1	EP900YSLM-A1	EP950YSLM-A1
Nominal Heating Capacity	kW	108.0	113.0	119.5
	BTU/h	368,500	385,600	407,700
Input	kW	27.76	29.04	32.03


PUHY-		EP1000YSLM-A1	EP1050YSLM-A1	EP1100YSLM-A1
Nominal Heating Capacity	kW	127.0	132.0	140.0
	BTU/h	433,300	450,400	477,700
Input	kW	33.50	36.87	41.17

PUHY-		EP1150YSLM-A1	EP1200YSLM-A1	EP1250YSLM-A1
Nominal Heating Capacity	kW	145.0	150.0	156.5
	BTU/h	494,700	511,800	534,000
Input	kW	44.47	45.45	49.36

PUHY-		EP1300YSLM-A1	EP1350YSLM-A1
Nominal Heating Capacity	kW	163.0	168.0
	BTU/h	556,200	573,200
Input	kW	50.62	54.36

Indoor unit temperature correction

To be used to correct indoor unit capacity only

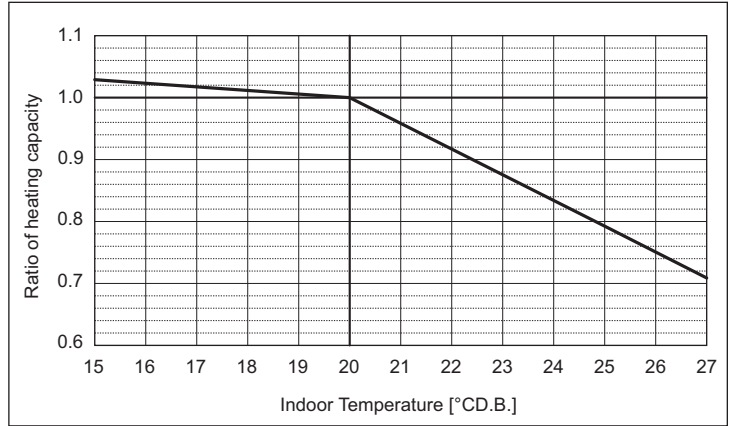


Y (HIGH COP)

Outdoor unit temperature correction

To be used to correct outdoor unit only

Outdoor unit capacity is NOT affected by the indoor temperature.

Outdoor unit power input is affected by the indoor and outdoor temperatures. Please consult the sales office for details.

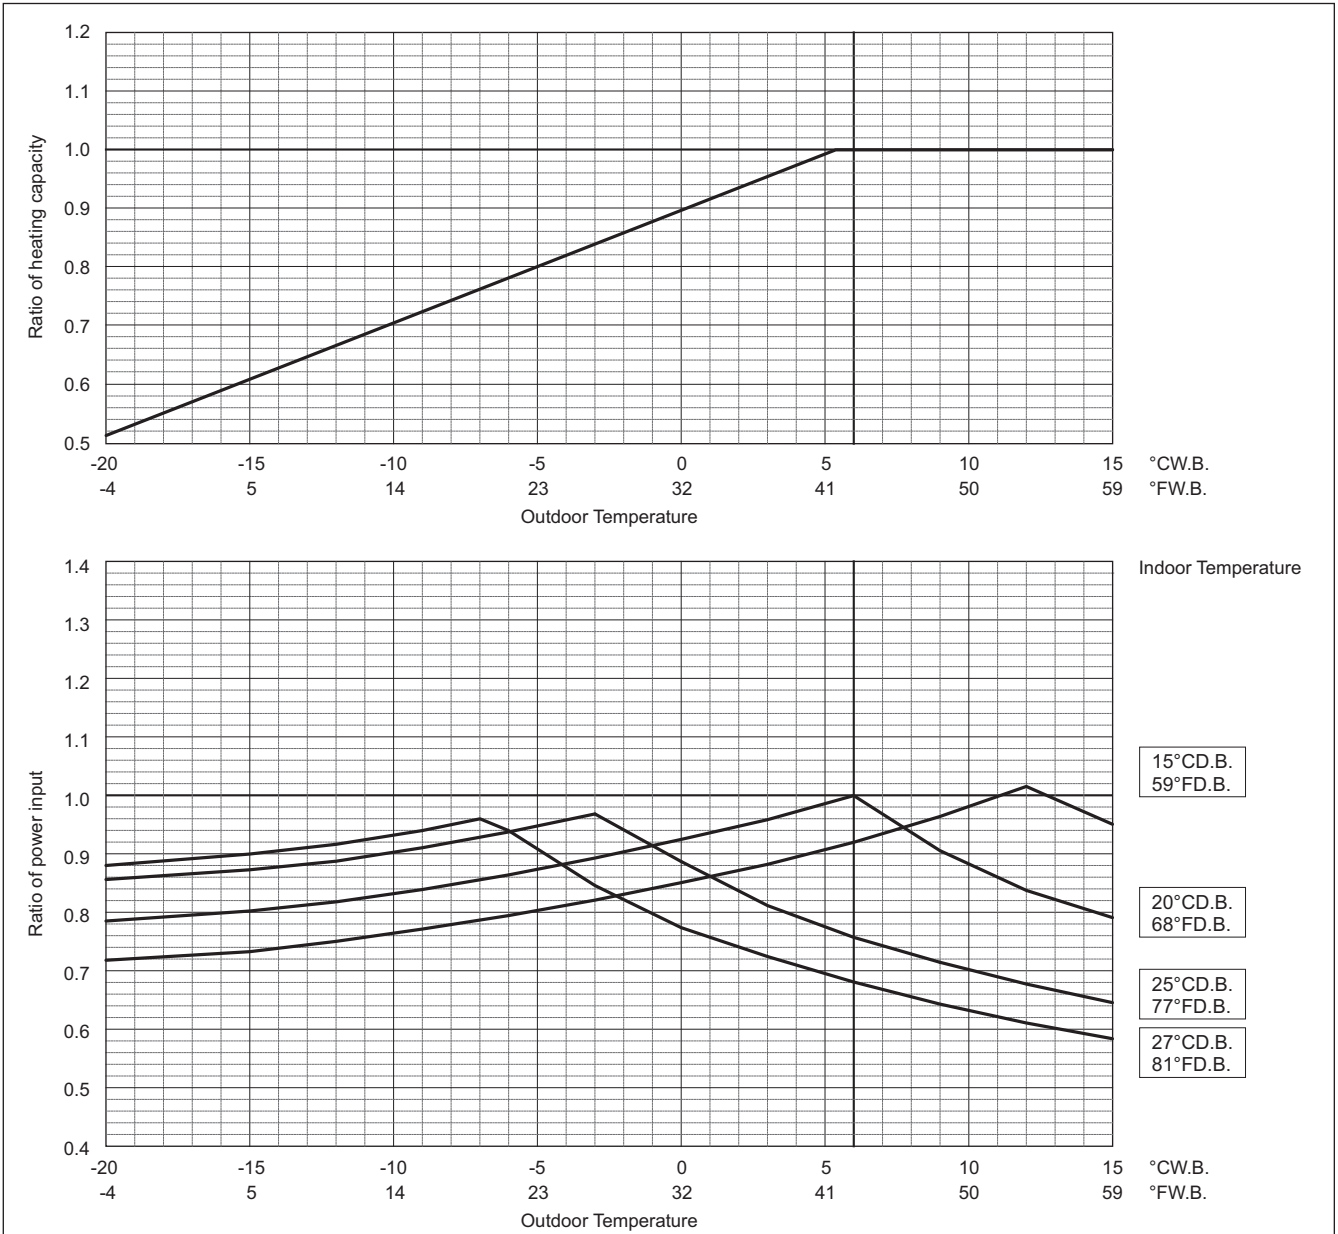


8-3. Correction by total indoor

CITY MULTI system have different capacities and inputs when many combinations of indoor units with different total capacities are connected. Using following tables, the maximum capacity can be found to ensure the system is installed with enough capacity for a particular application.

Y (HIGH COP)


PUHY-EP200YLM-A1		
Nominal Cooling Capacity	kW	22.4
	BTU/h	76,400
Input	kW	5.19

PUHY-EP200YLM-A1		
Nominal Heating Capacity	kW	25.0
	BTU/h	85,300
Input	kW	5.73

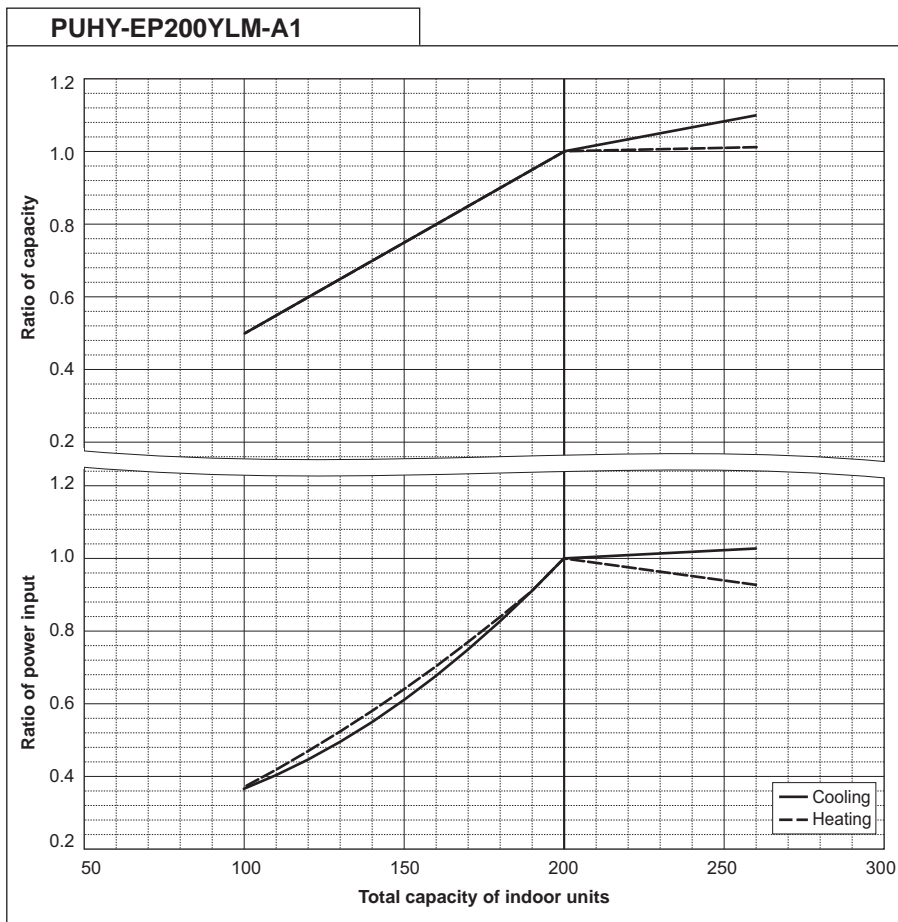


PUHY-EP250YLM-A1		
Nominal Cooling Capacity	kW	28.0
	BTU/h	95,500
Input	kW	6.89

PUHY-EP250YLM-A1		
Nominal Heating Capacity	kW	31.5
	BTU/h	107,500
Input	kW	7.68

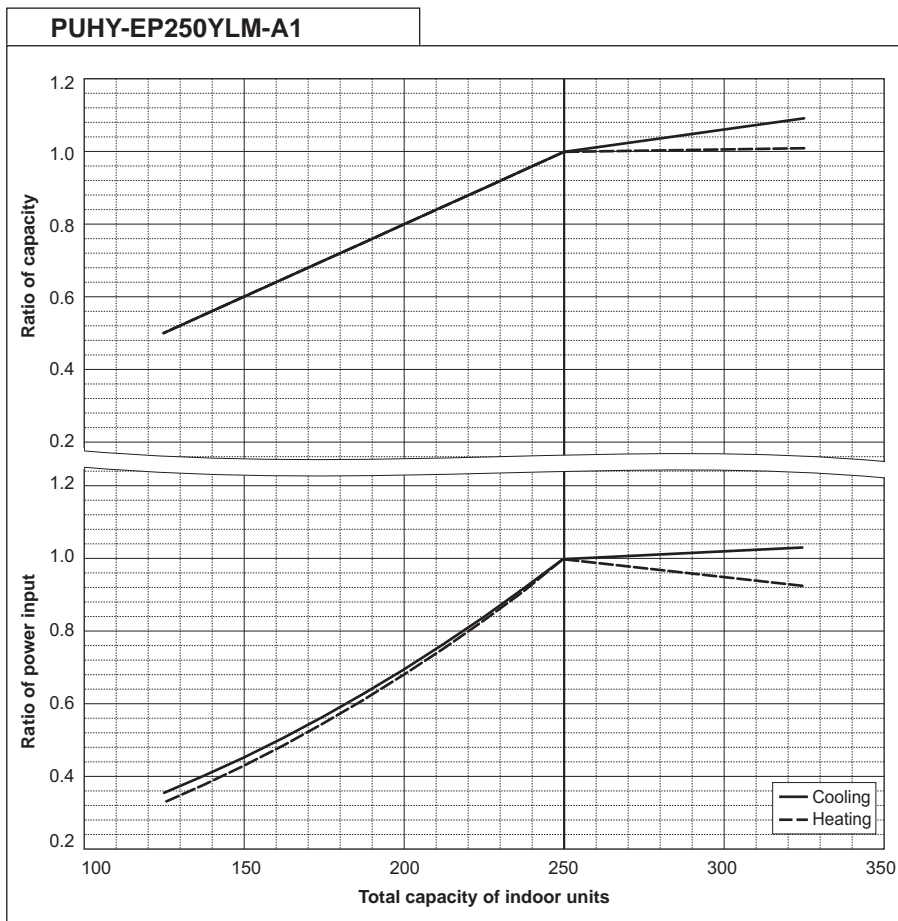


PUHY-EP300YLM-A1		
Nominal Cooling Capacity	kW	33.5
	BTU/h	114,300
Input	kW	8.56

PUHY-EP300YLM-A1		
Nominal Heating Capacity	kW	37.5
	BTU/h	128,000
Input	kW	9.16

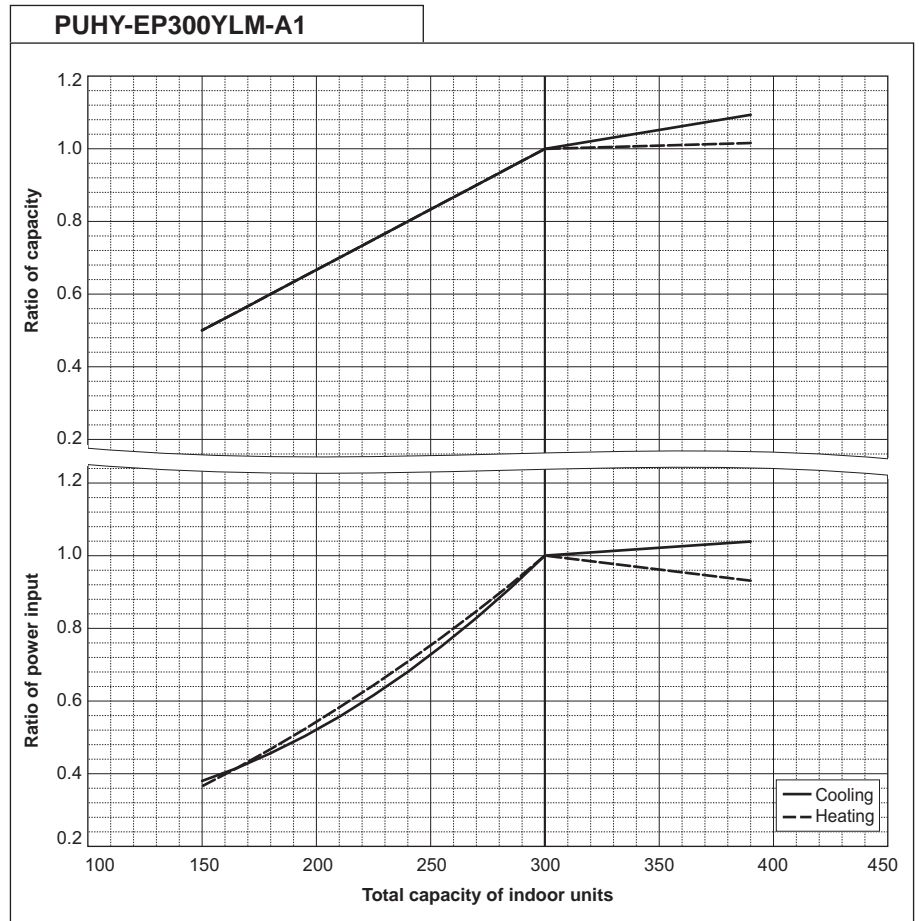

PUHY-EP350YLM-A1		
Nominal Cooling Capacity	kW	40.0
	BTU/h	136,500
Input	kW	11.69

PUHY-EP350YLM-A1		
Nominal Heating Capacity	kW	45.0
	BTU/h	153,500
Input	kW	12.53

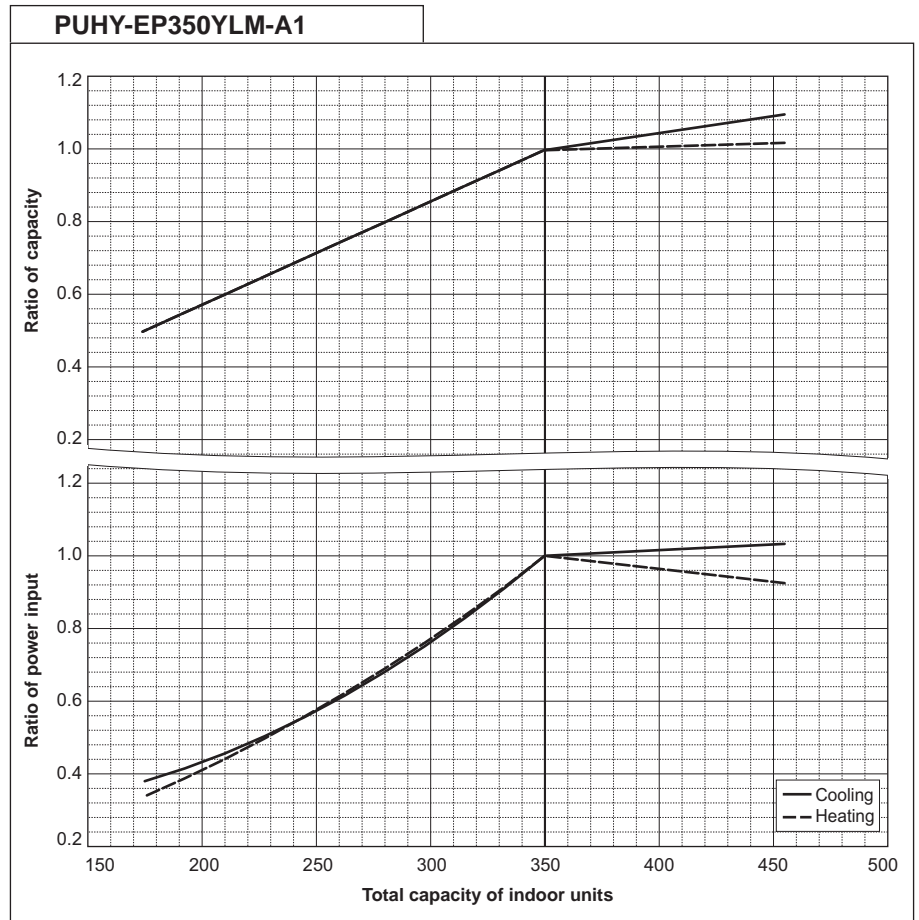


γ (HIGH COP)

8. CAPACITY TABLES

Y (HIGH COP)


PUHY-EP400YLM-A1		
Nominal Cooling Capacity	kW	45.0
	BTU/h	153,500
Input	kW	12.26

PUHY-EP400YLM-A1		
Nominal Heating Capacity	kW	50.0
	BTU/h	170,600
Input	kW	13.15

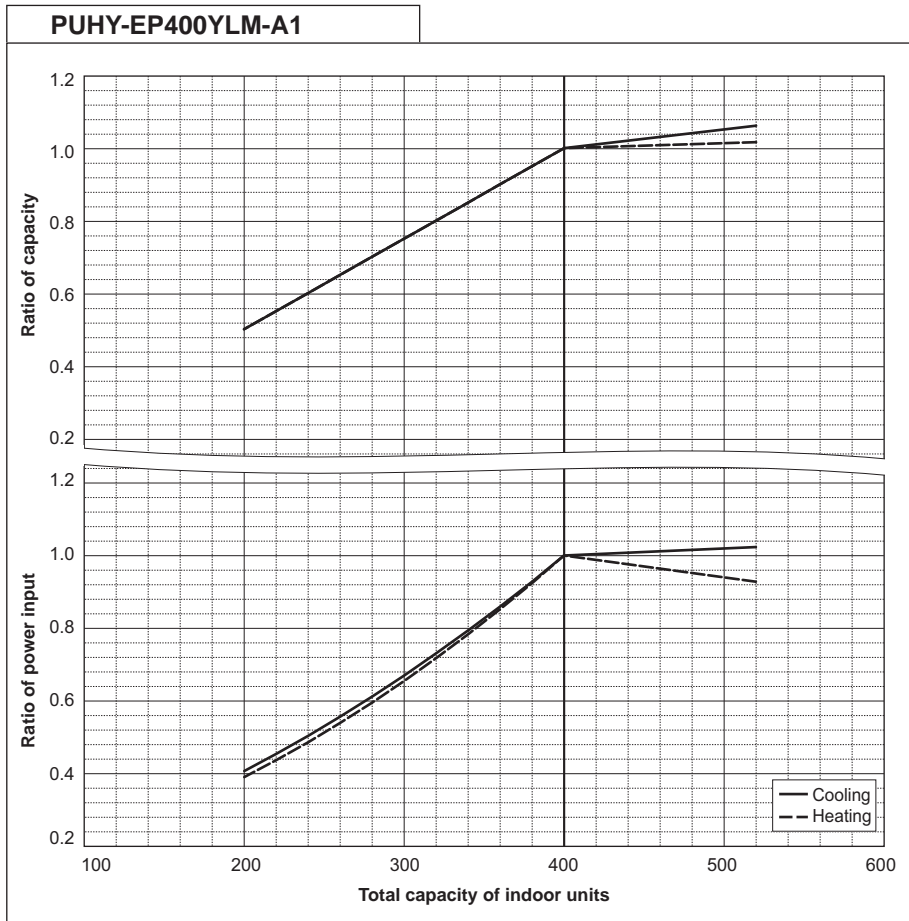


PUHY-EP450YLM-A1		
Nominal Cooling Capacity	kW	50.0
	BTU/h	170,600
Input	kW	14.79

PUHY-EP450YLM-A1		
Nominal Heating Capacity	kW	56.0
	BTU/h	191,100
Input	kW	16.09

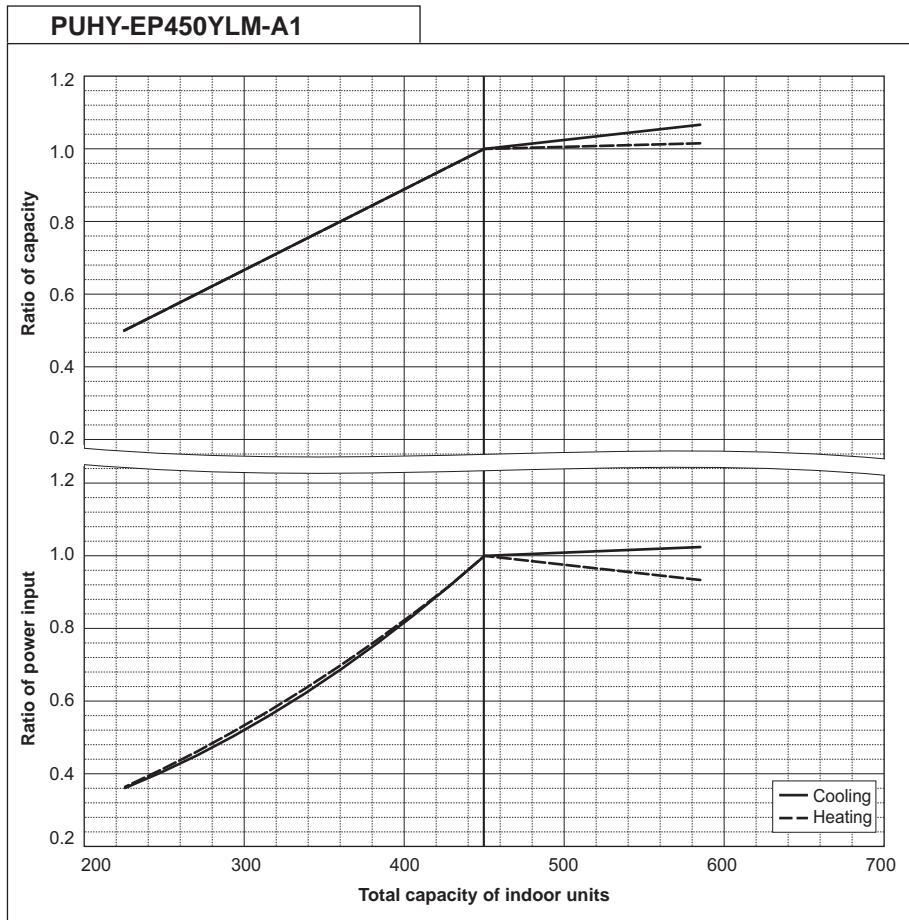


PUHY-EP500YLM-A1		
Nominal Cooling Capacity	kW	56.0
	BTU/h	191,100
Input	kW	18.72

PUHY-EP500YLM-A1		
Nominal Heating Capacity	kW	63.0
	BTU/h	215,000
Input	kW	19.68

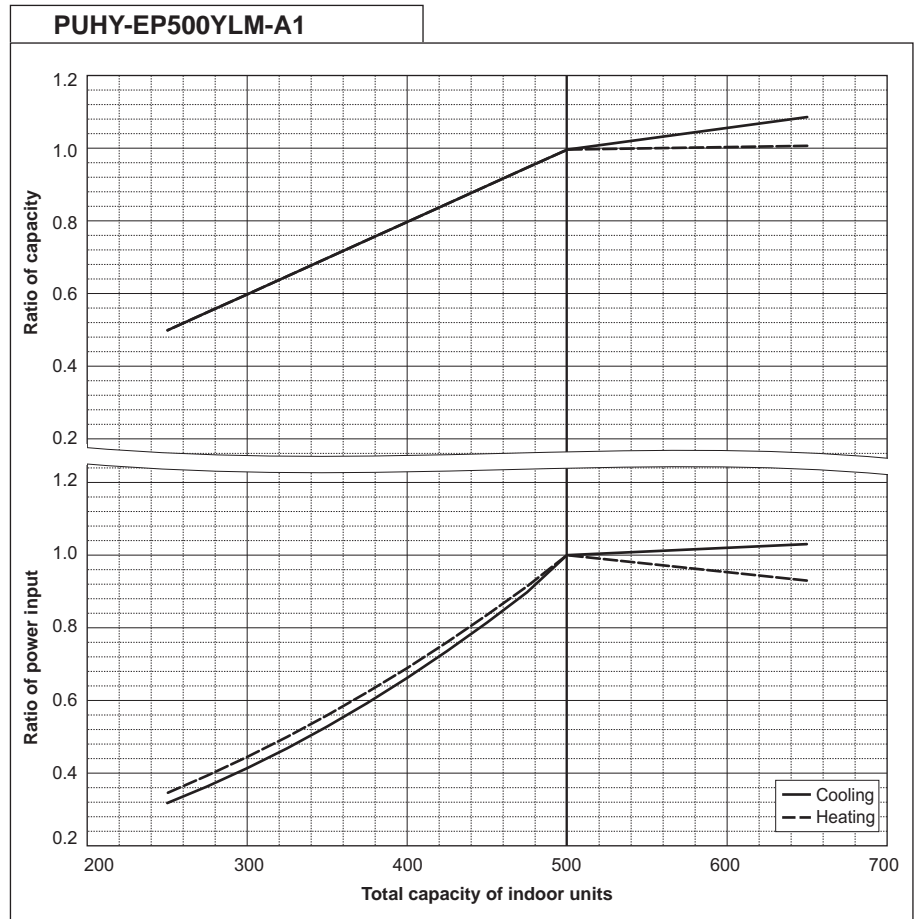

PUHY-EP550YSLM-A1		
Nominal Cooling Capacity	kW	63.0
	BTU/h	215,000
Input	kW	16.62

PUHY-EP550YSLM-A1		
Nominal Heating Capacity	kW	69.0
	BTU/h	235,400
Input	kW	17.73

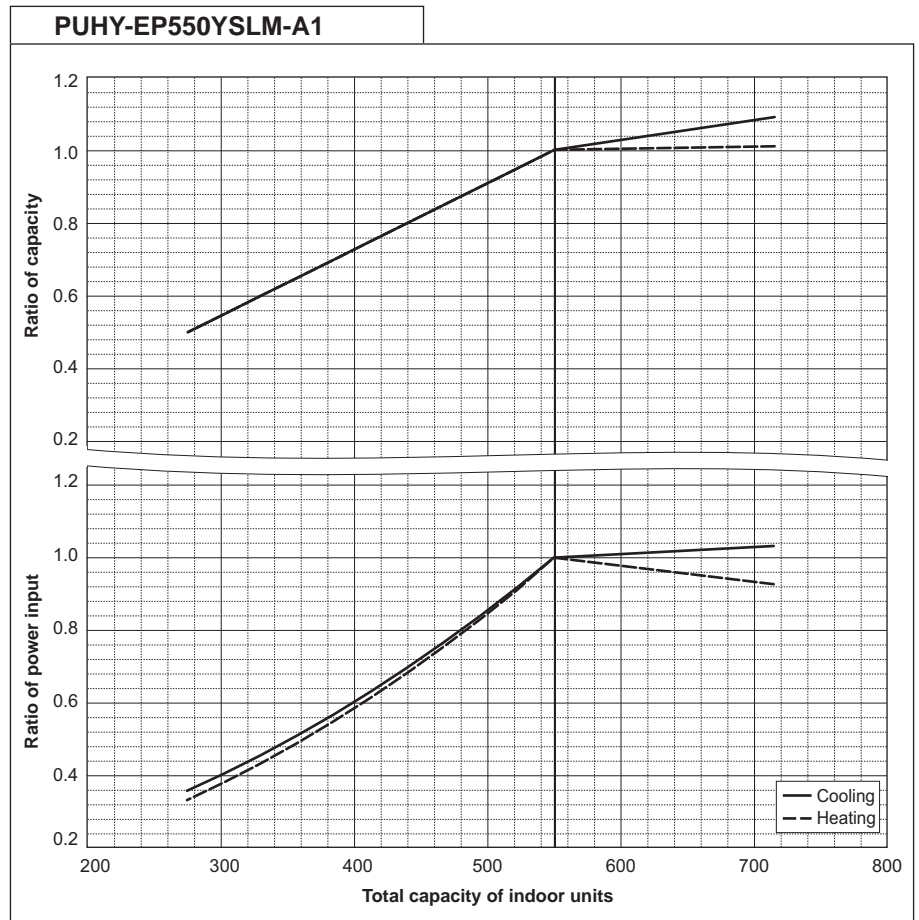


γ (HIGH COP)

Y (HIGH COP)


PUHY-EP600YSLM-A1		
Nominal Cooling Capacity	kW	69.0
	BTU/h	235,400
Input	kW	18.59

PUHY-EP600YSLM-A1		
Nominal Heating Capacity	kW	76.5
	BTU/h	261,000
Input	kW	19.66

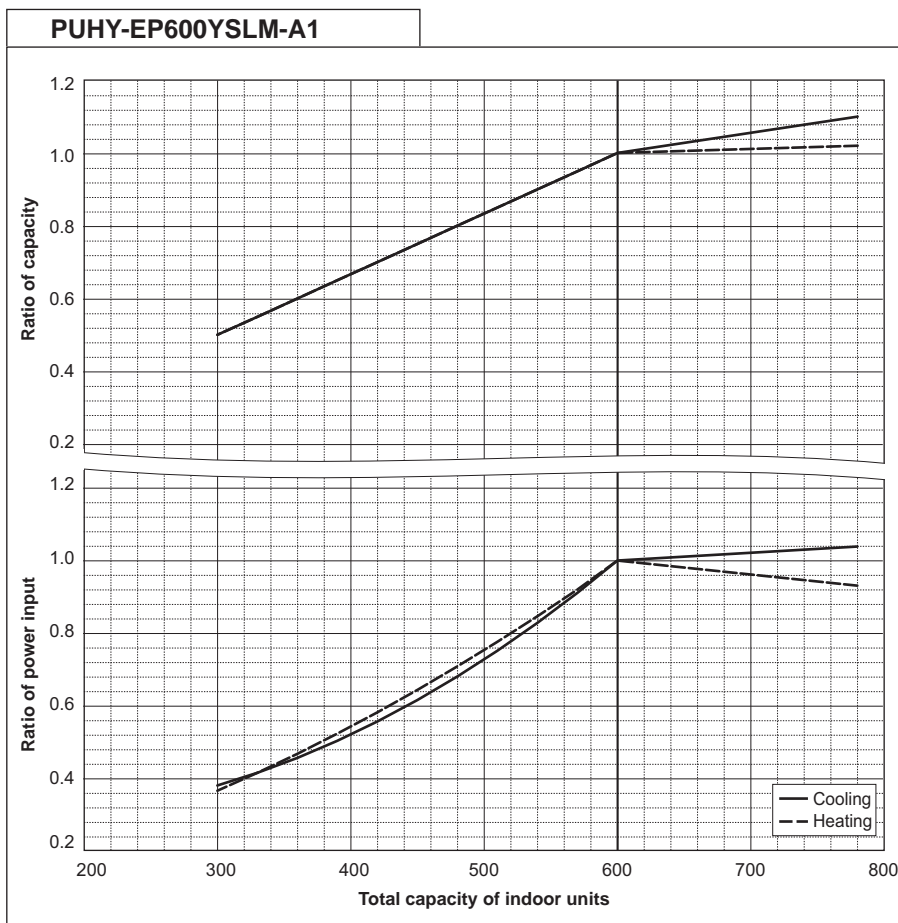


PUHY-EP650YSLM-A1		
Nominal Cooling Capacity	kW	73.0
	BTU/h	249,100
Input	kW	18.15

PUHY-EP650YSLM-A1		
Nominal Heating Capacity	kW	81.5
	BTU/h	278,100
Input	kW	20.07

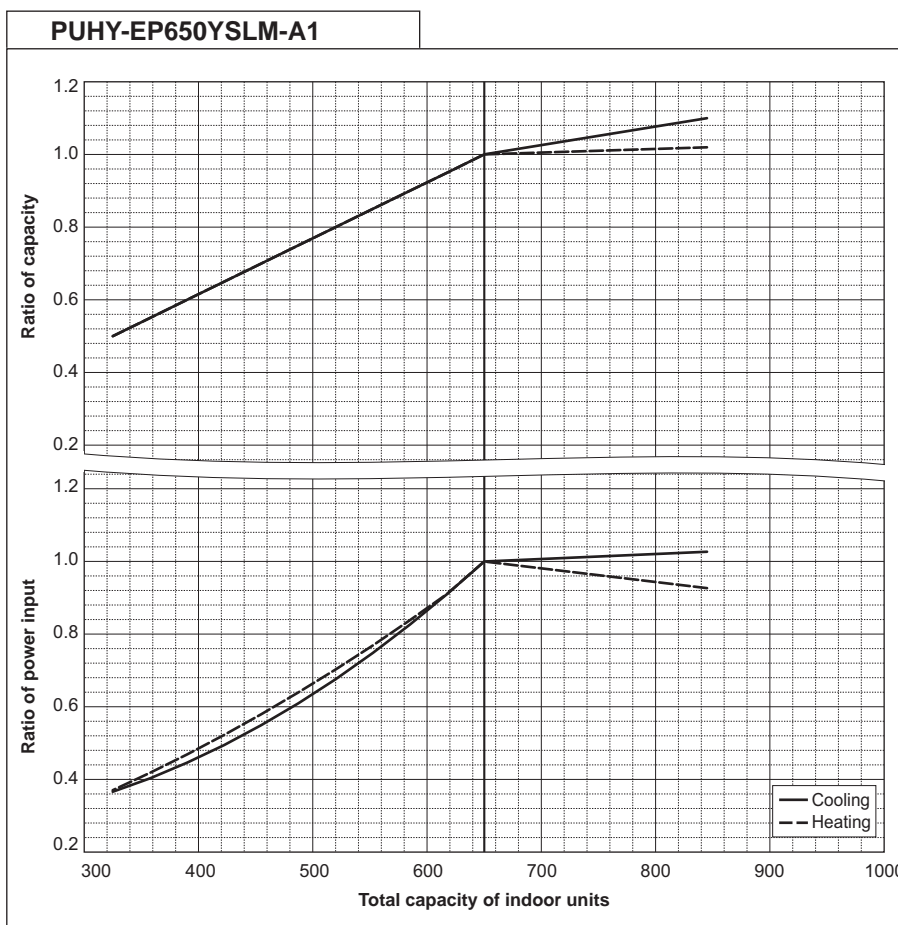


PUHY-EP700YSLM-A1		
Nominal Cooling Capacity	kW	80.0
	BTU/h	273,000
Input	kW	20.15

PUHY-EP700YSLM-A1		
Nominal Heating Capacity	kW	88.0
	BTU/h	300,300
Input	kW	21.67

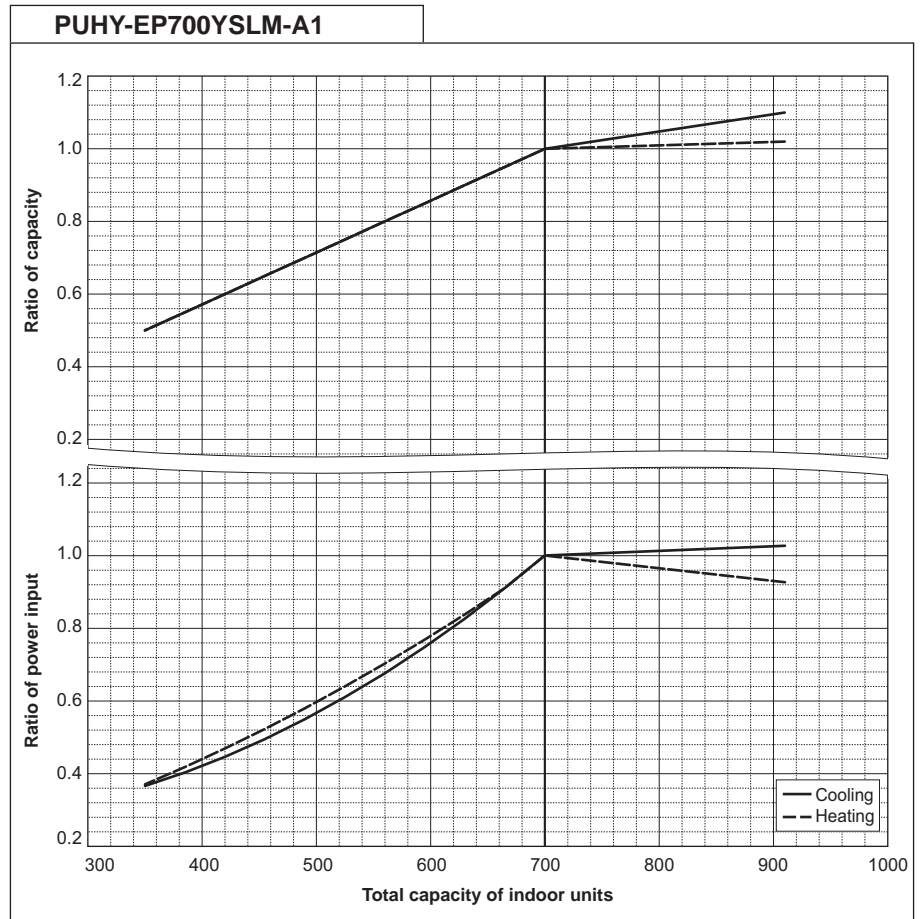

PUHY-EP750YSLM-A1		
Nominal Cooling Capacity	kW	85.0
	BTU/h	290,000
Input	kW	21.85

PUHY-EP750YSLM-A1		
Nominal Heating Capacity	kW	95.0
	BTU/h	324,100
Input	kW	23.92

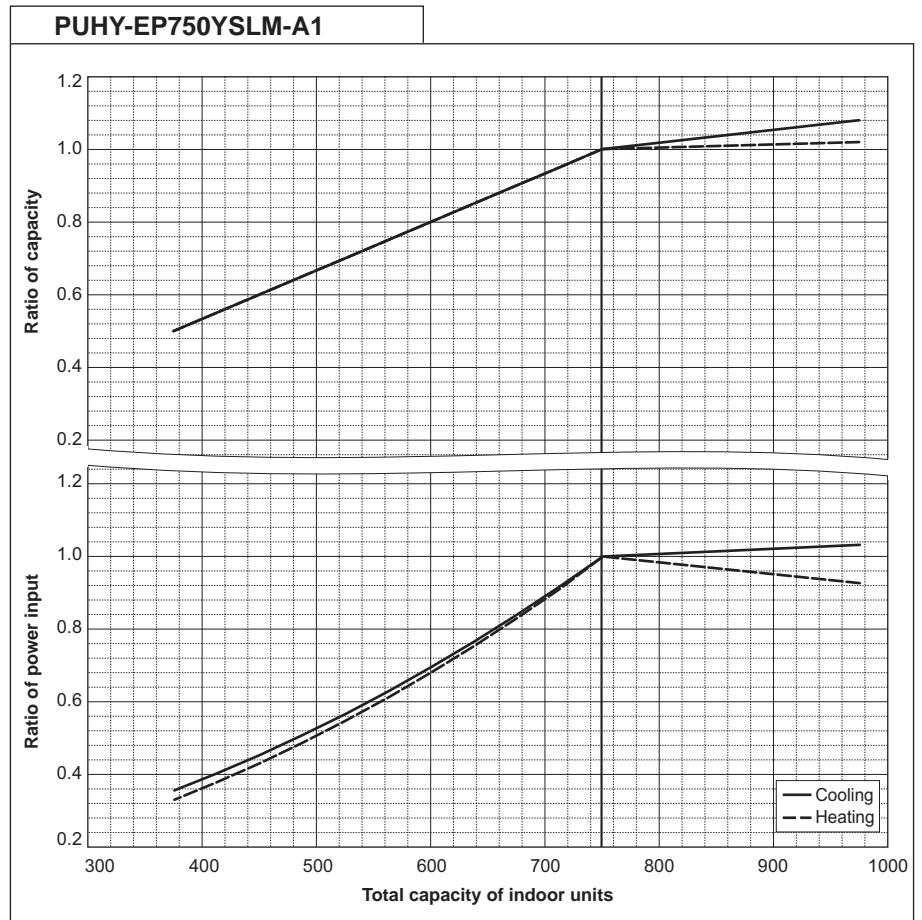


γ (HIGH COP)

8. CAPACITY TABLES

Y (HIGH COP)


PUHY-EP800YSLM-A1		
Nominal Cooling Capacity	kW	90.0
	BTU/h	307,100
Input	kW	23.43

PUHY-EP800YSLM-A1		
Nominal Heating Capacity	kW	100.0
	BTU/h	341,200
Input	kW	25.18

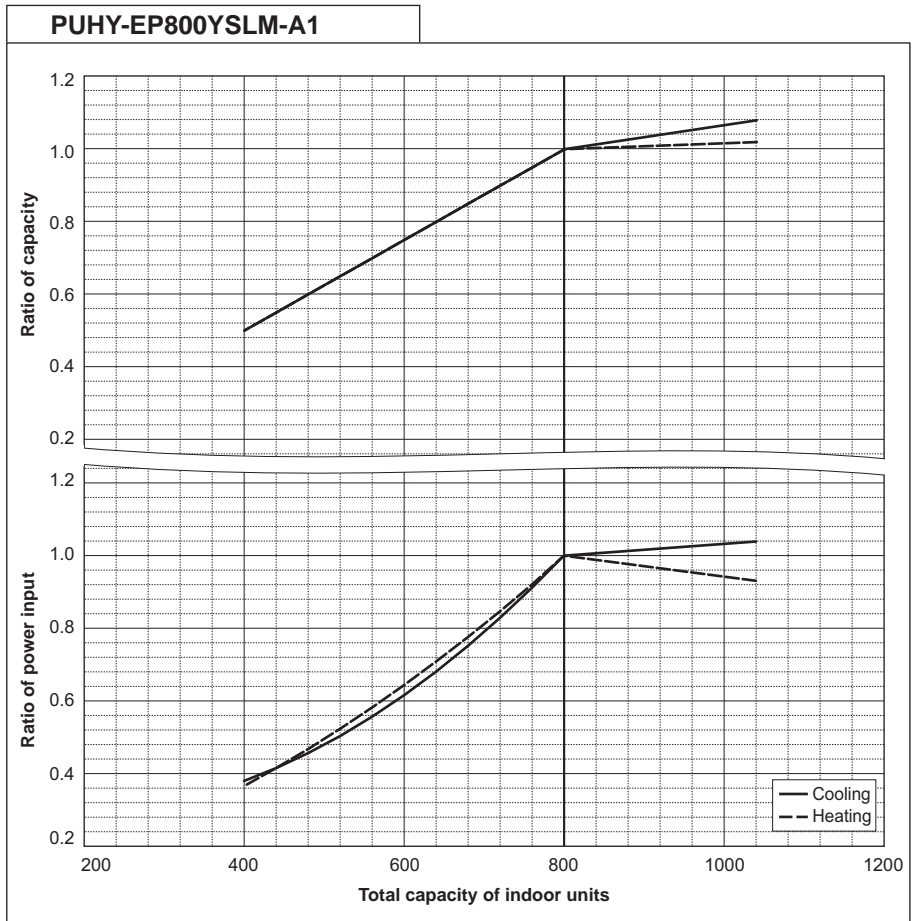


PUHY-EP850YSLM-A1		
Nominal Cooling Capacity	kW	96.0
	BTU/h	327,600
Input	kW	25.53

PUHY-EP850YSLM-A1		
Nominal Heating Capacity	kW	108.0
	BTU/h	368,500
Input	kW	27.76

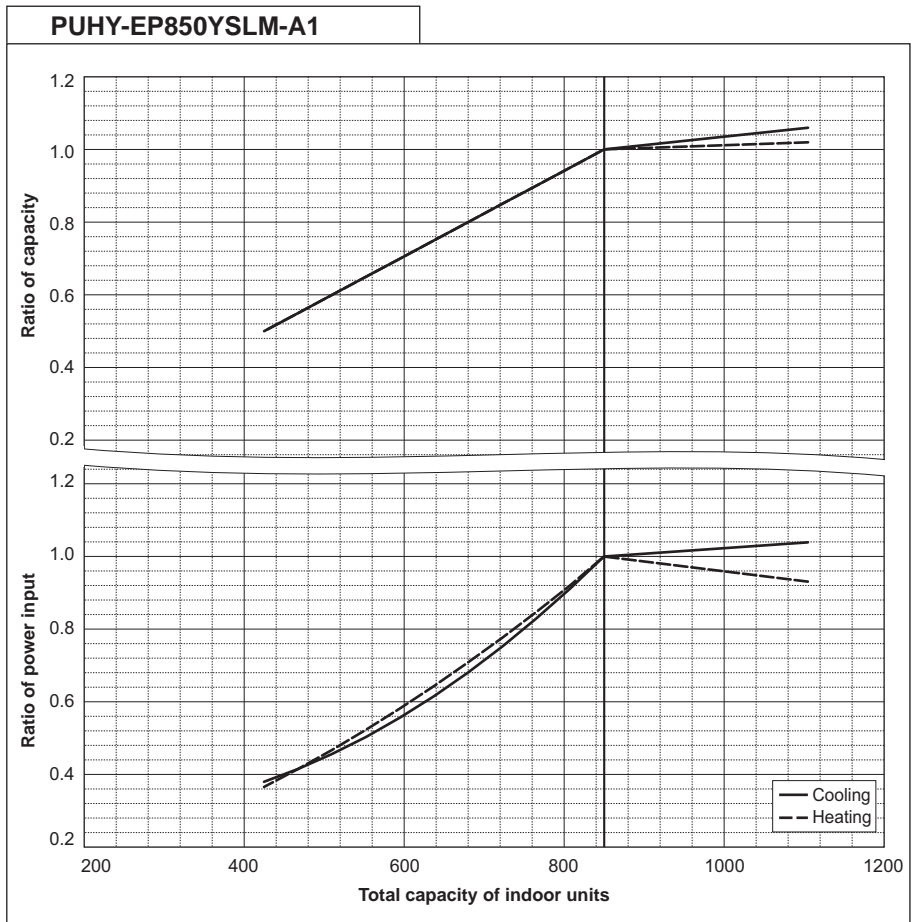

PUHY-EP900YSLM-A1		
Nominal Cooling Capacity	kW	101.0
	BTU/h	344,600
Input	kW	27.22


PUHY-EP900YSLM-A1		
Nominal Heating Capacity	kW	113.0
	BTU/h	385,600
Input	kW	29.04

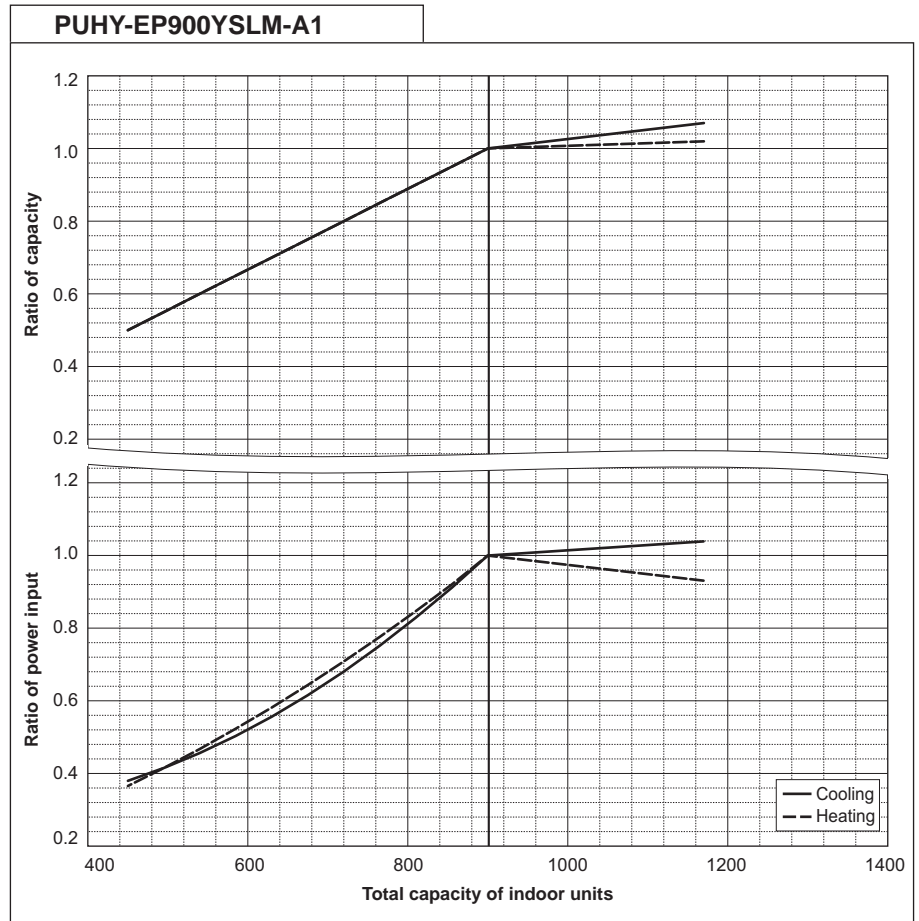

γ (HIGH COP)

PUHY-EP950YSLM-A1		
Nominal Cooling Capacity	kW	108.0
	BTU/h	368,500
Input	kW	30.33


PUHY-EP950YSLM-A1		
Nominal Heating Capacity	kW	119.5
	BTU/h	407,700
Input	kW	32.03

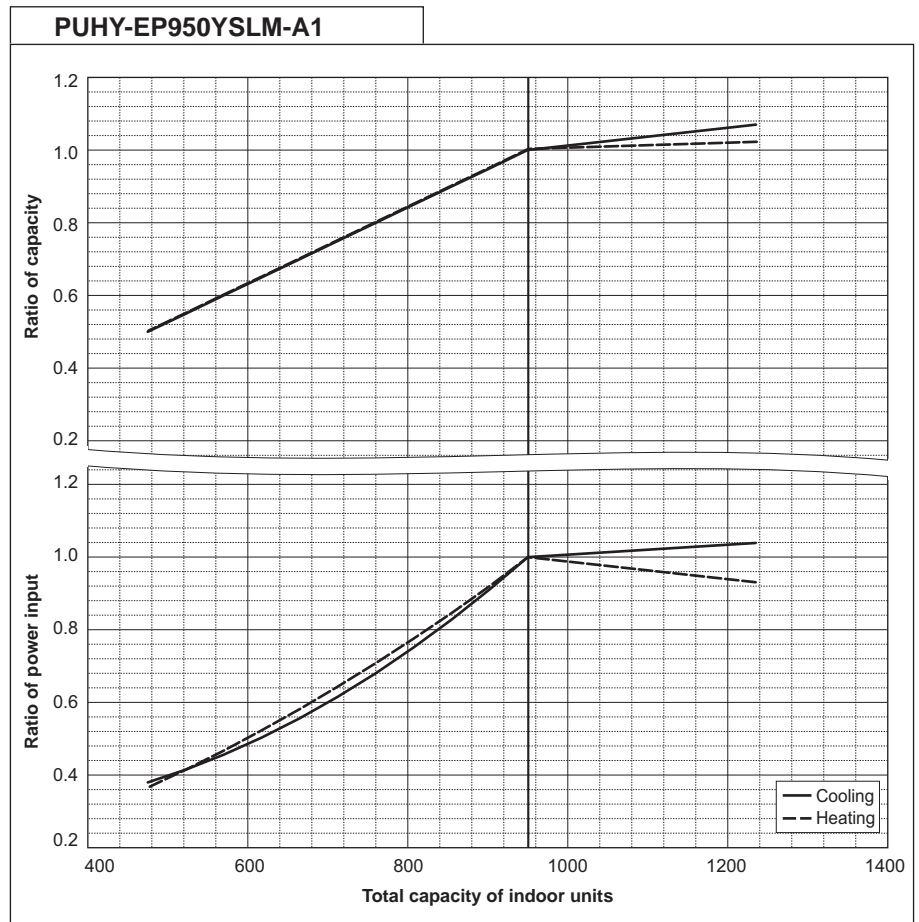

Y (HIGH COP)


PUHY-EP1000YSLM-A1		
Nominal Cooling Capacity	kW	113.0
	BTU/h	385,600
Input	kW	31.04

PUHY-EP1000YSLM-A1		
Nominal Heating Capacity	kW	127.0
	BTU/h	433,300
Input	kW	33.50

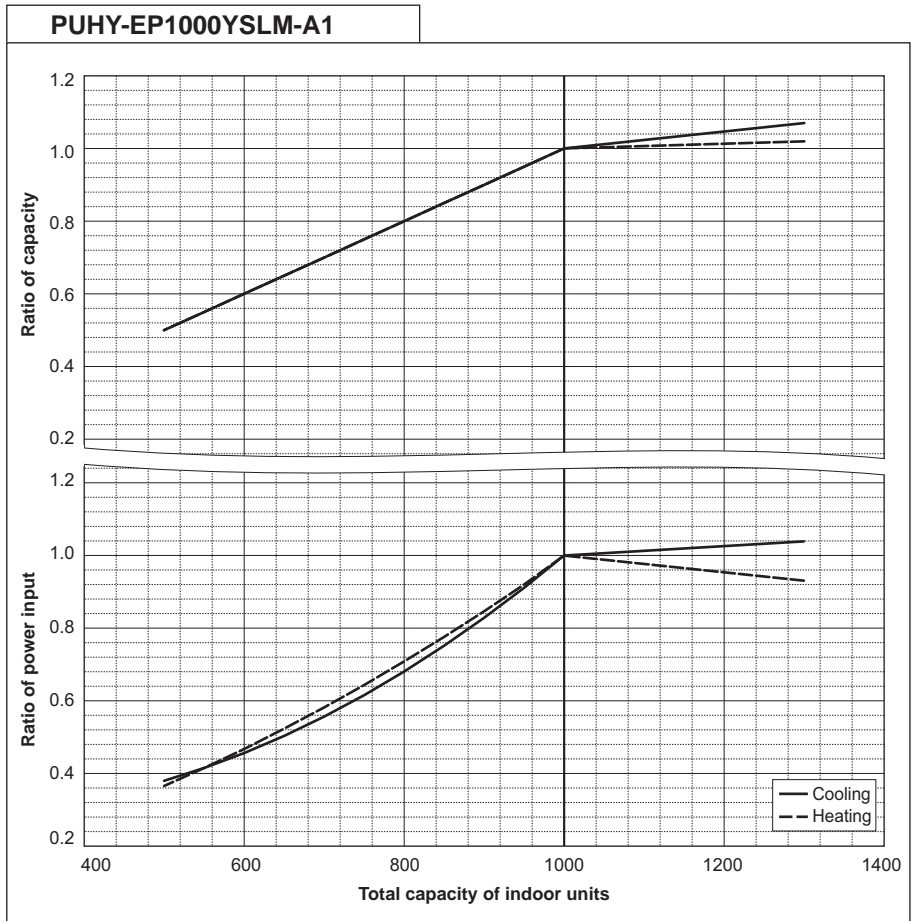


PUHY-EP1050YSLM-A1		
Nominal Cooling Capacity	kW	118.0
	BTU/h	402,600
Input	kW	34.40

PUHY-EP1050YSLM-A1		
Nominal Heating Capacity	kW	132.0
	BTU/h	450,400
Input	kW	36.87

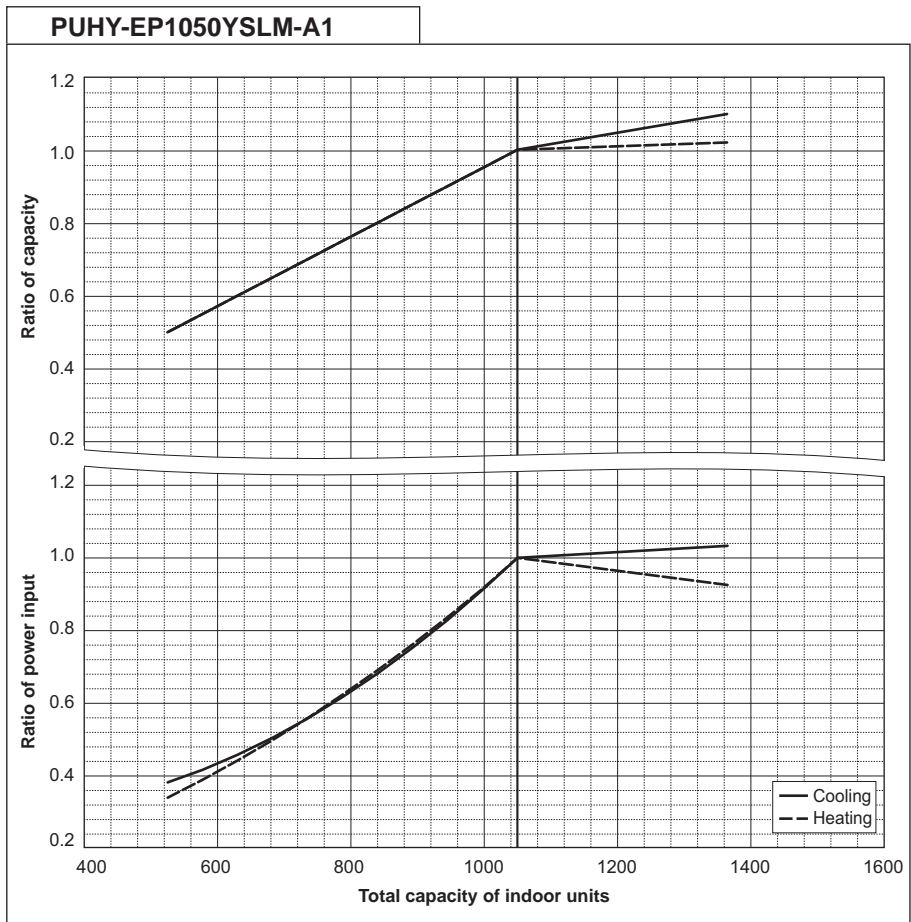


PUHY-EP1100YSLM-A1		
Nominal Cooling Capacity	kW	124.0
	BTU/h	423,100
Input	kW	38.15

PUHY-EP1100YSLM-A1		
Nominal Heating Capacity	kW	140.0
	BTU/h	477,700
Input	kW	41.17

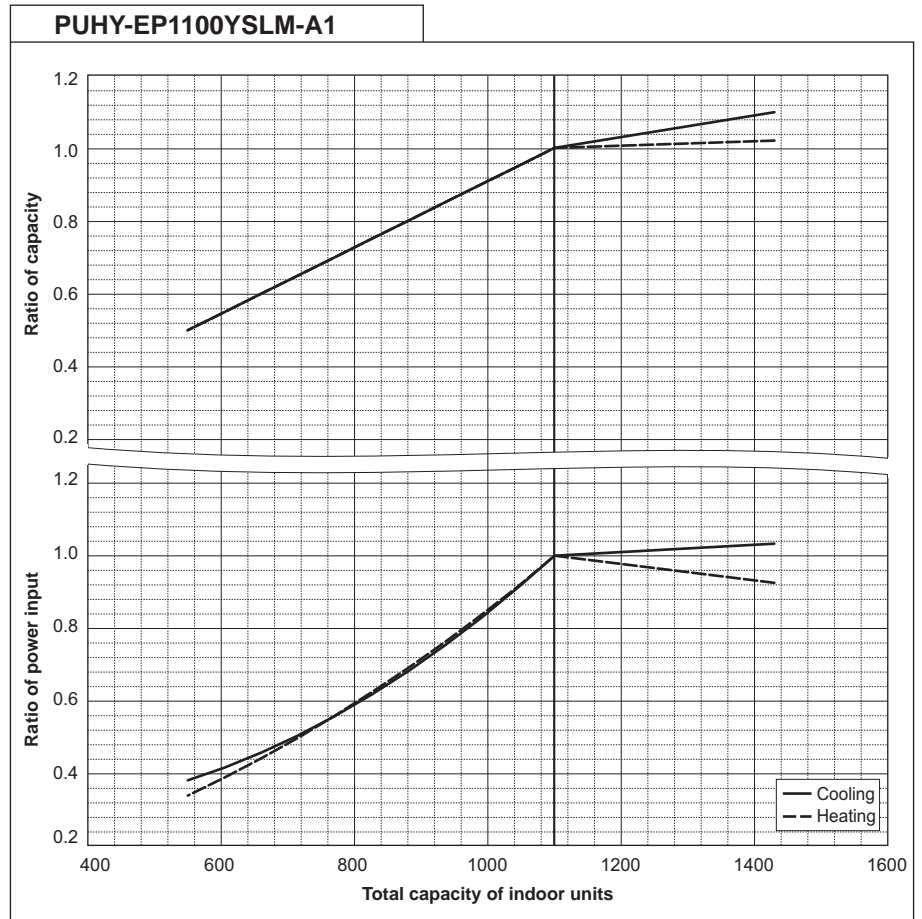

PUHY-EP1150YSLM-A1		
Nominal Cooling Capacity	kW	130.0
	BTU/h	443,600
Input	kW	41.53

PUHY-EP1150YSLM-A1		
Nominal Heating Capacity	kW	145.0
	BTU/h	494,700
Input	kW	44.47

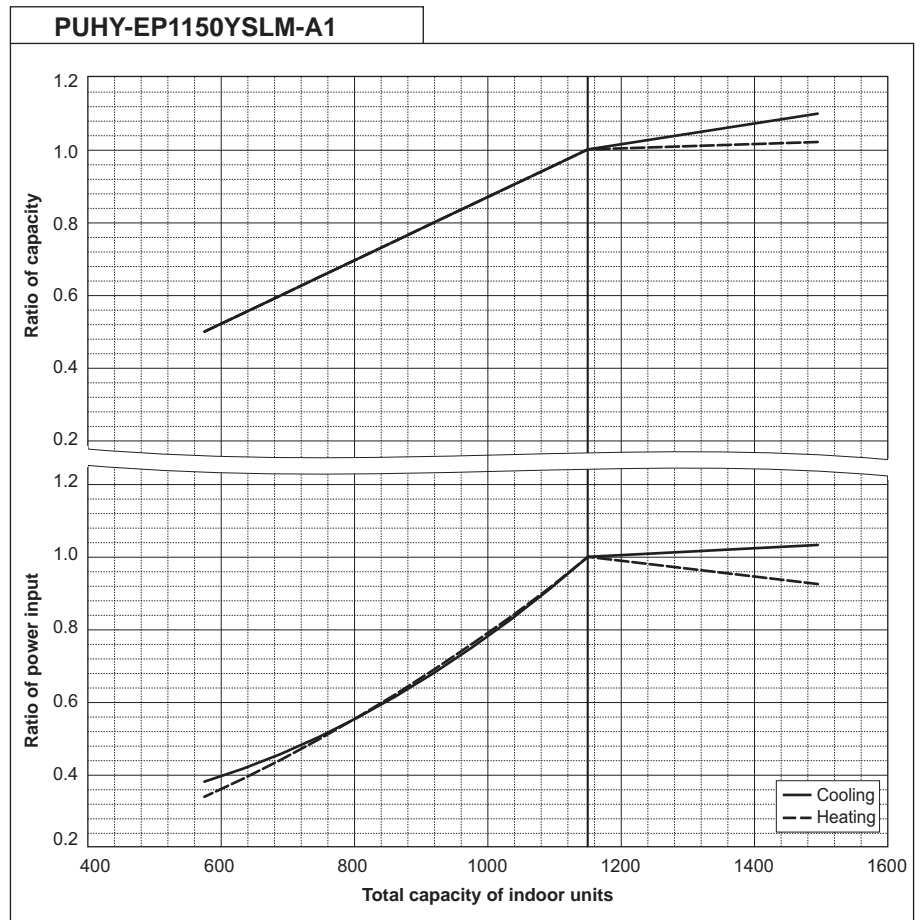


γ (HIGH COP)

Y (HIGH COP)


PUHY-EP1200YSLM-A1		
Nominal Cooling Capacity	kW	136.0
	BTU/h	464,000
Input	kW	42.76

PUHY-EP1200YSLM-A1		
Nominal Heating Capacity	kW	150.0
	BTU/h	511,800
Input	kW	45.45

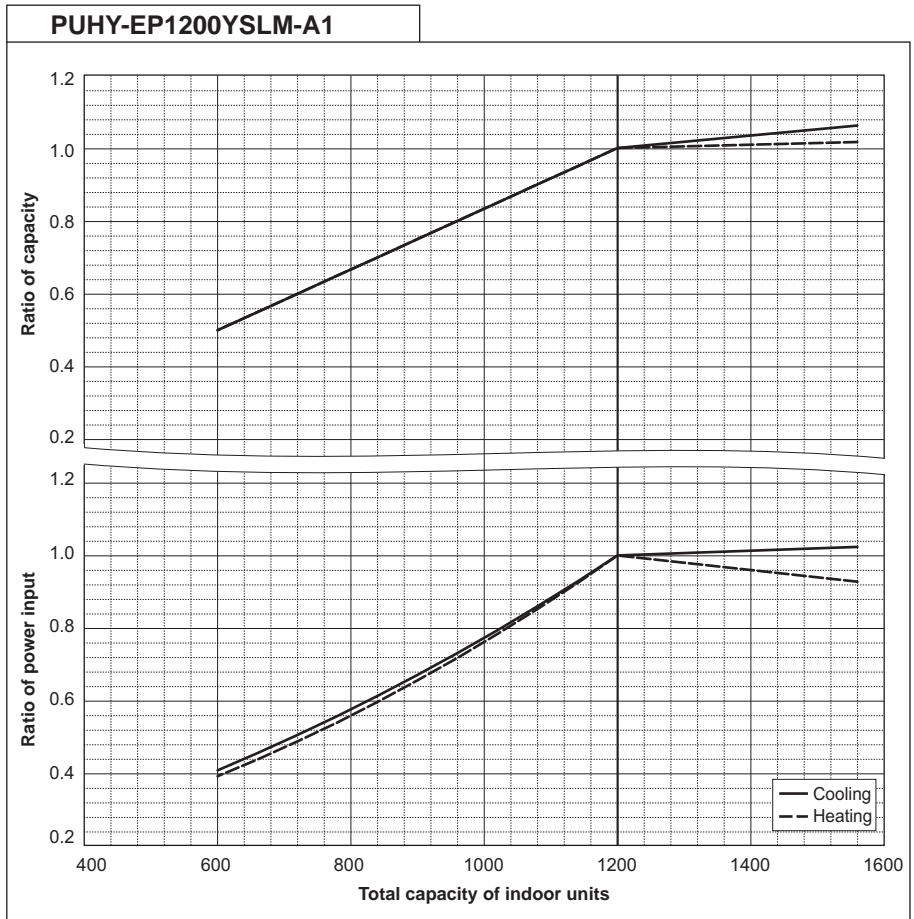


PUHY-EP1250YSLM-A1		
Nominal Cooling Capacity	kW	140.0
	BTU/h	477,700
Input	kW	45.90

PUHY-EP1250YSLM-A1		
Nominal Heating Capacity	kW	156.5
	BTU/h	534,000
Input	kW	49.36

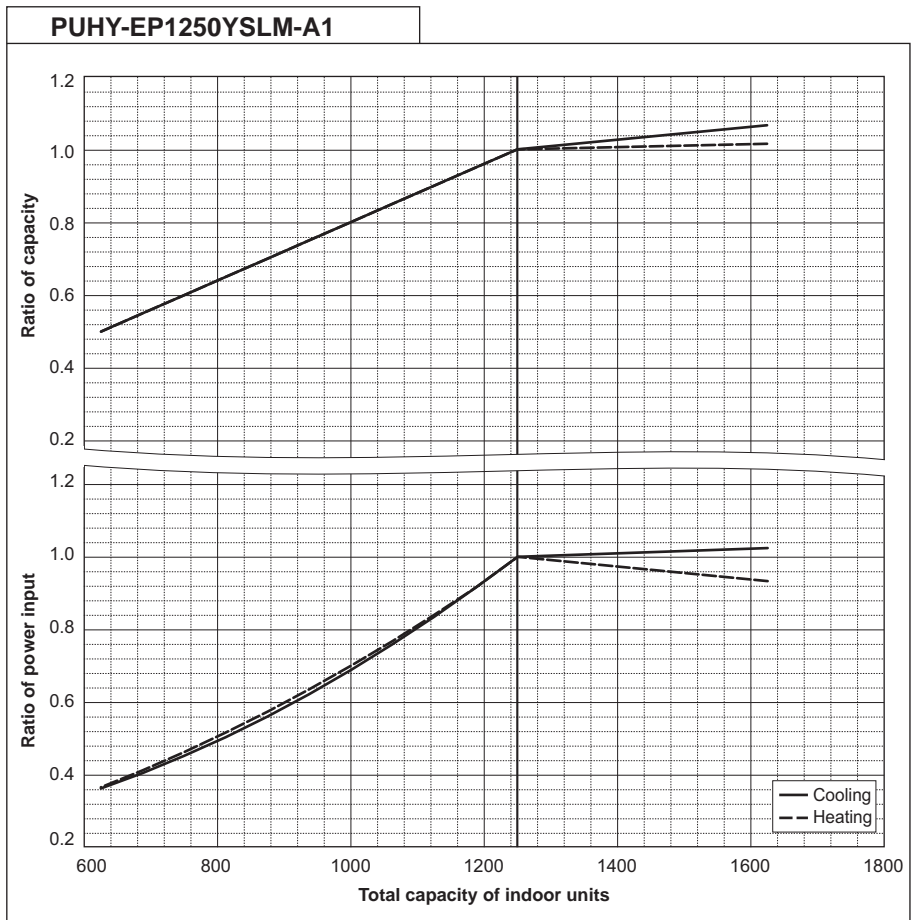


PUHY-EP1300YSLM-A1		
Nominal Cooling Capacity	kW	146.0
	BTU/h	498,200
Input	kW	46.94

PUHY-EP1300YSLM-A1		
Nominal Heating Capacity	kW	163.0
	BTU/h	556,200
Input	kW	50.62

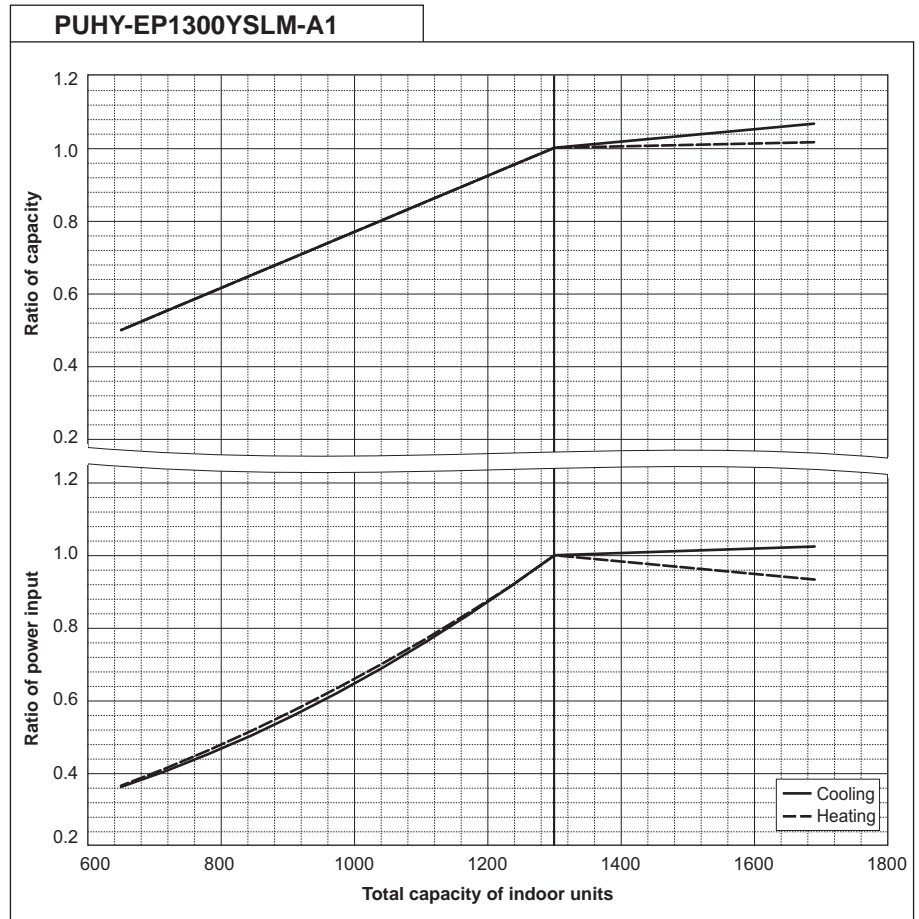

PUHY-EP1350YSLM-A1		
Nominal Cooling Capacity	kW	150.0
	BTU/h	511,800
Input	kW	50.00

PUHY-EP1350YSLM-A1		
Nominal Heating Capacity	kW	168.0
	BTU/h	573,200
Input	kW	54.36

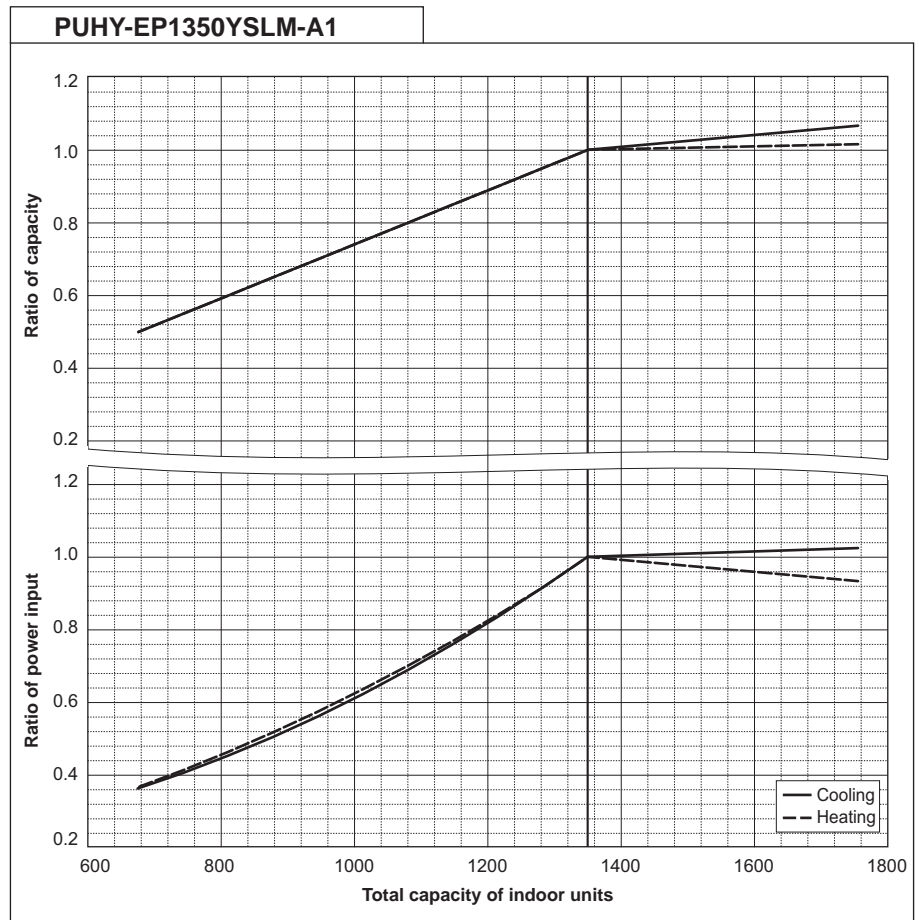


γ (HIGH COP)


8-4. Correction by refrigerant piping length

CITY MULTI system can extend the piping flexibly within its limitation for the actual situation. However, a decrease of cooling/heating capacity could happen correspondently. Using following correction factor according to the equivalent length of the piping shown at 8-4-1 and 8-4-2, the capacity can be observed. 8-4-3 shows how to obtain the equivalent length of piping.

8-4-1. Cooling capacity correction


Y (HIGH COP)

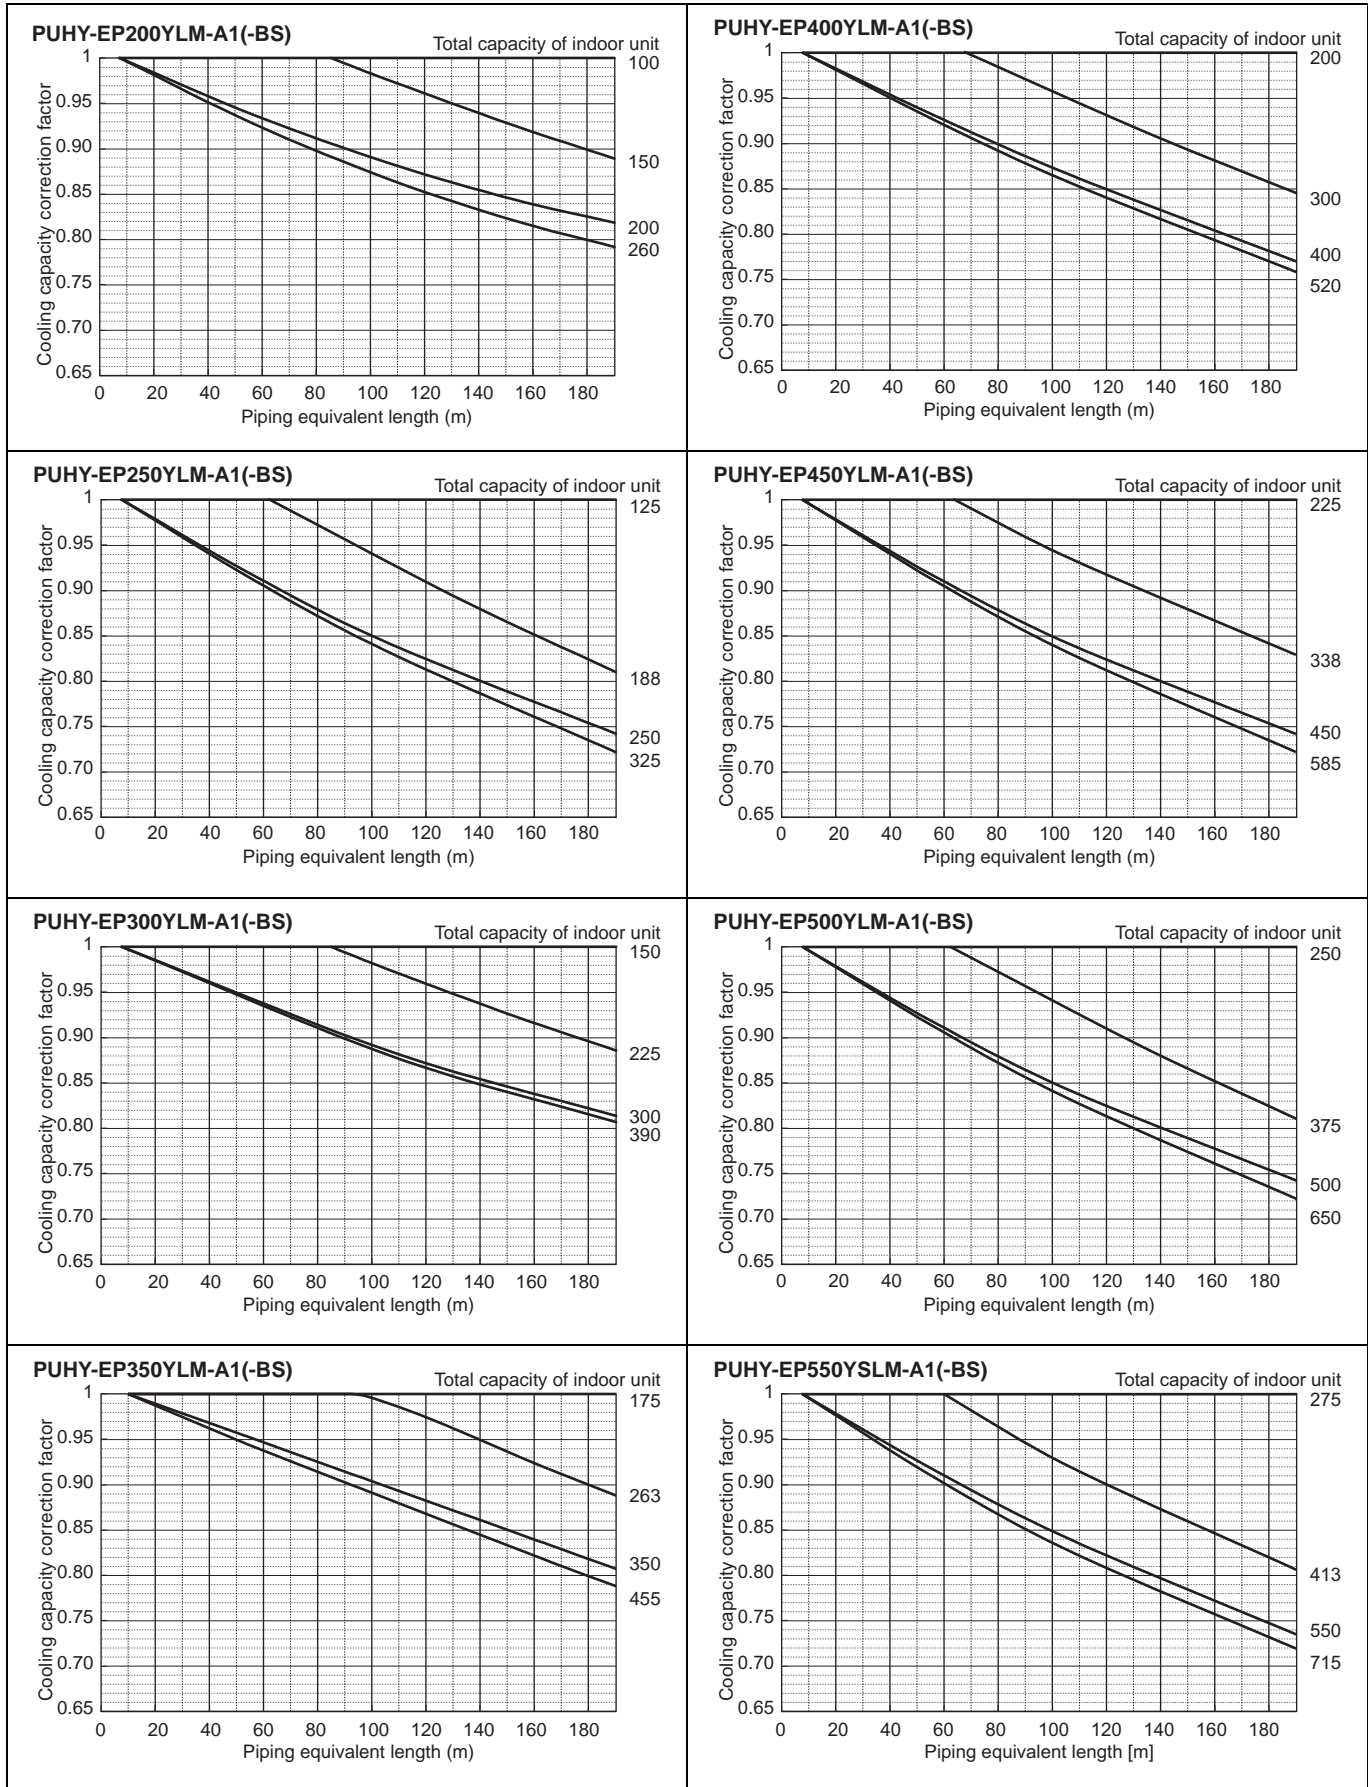

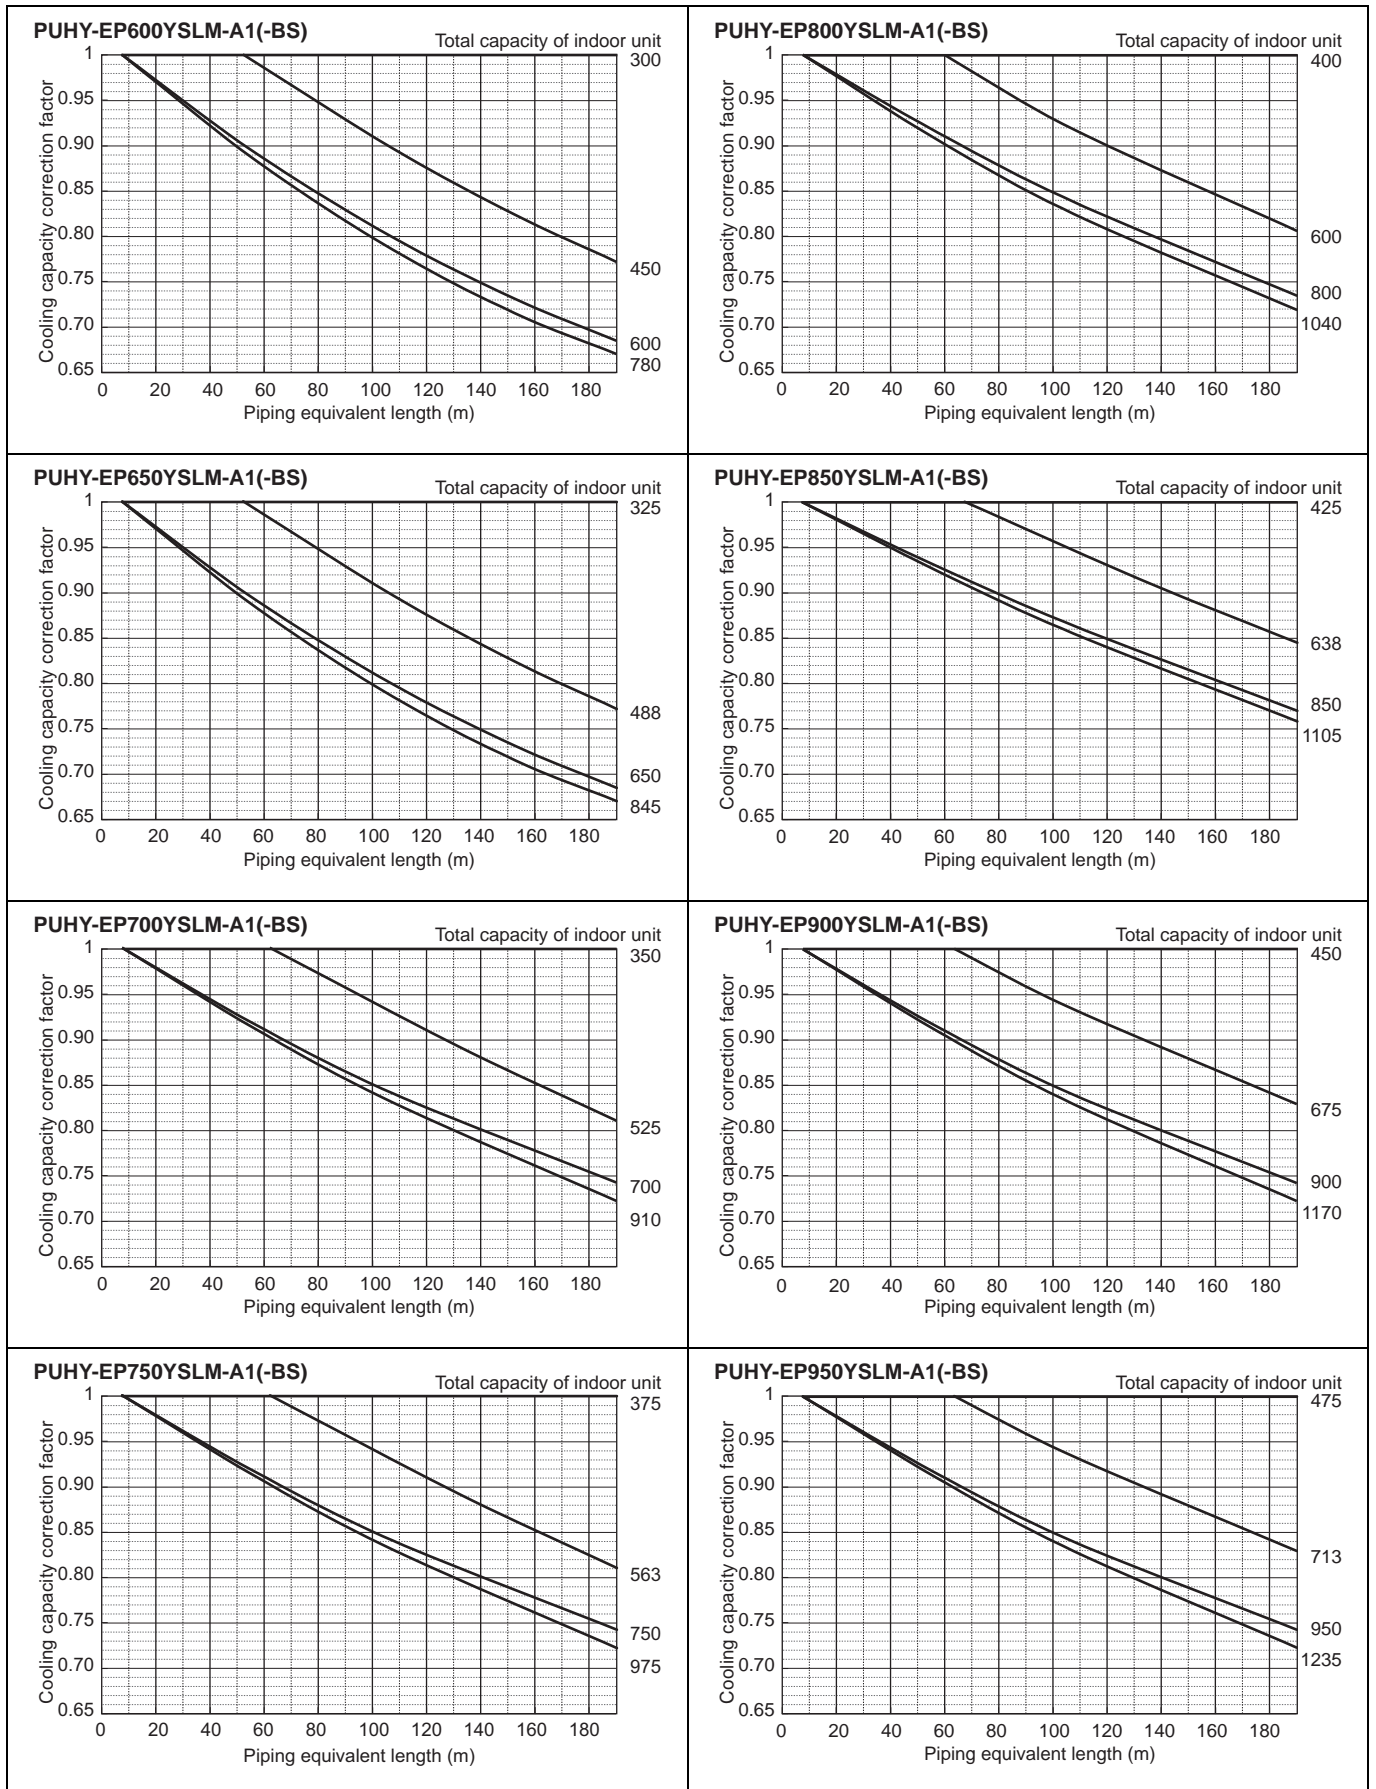


8. CAPACITY TABLES

Y (HIGH COP)

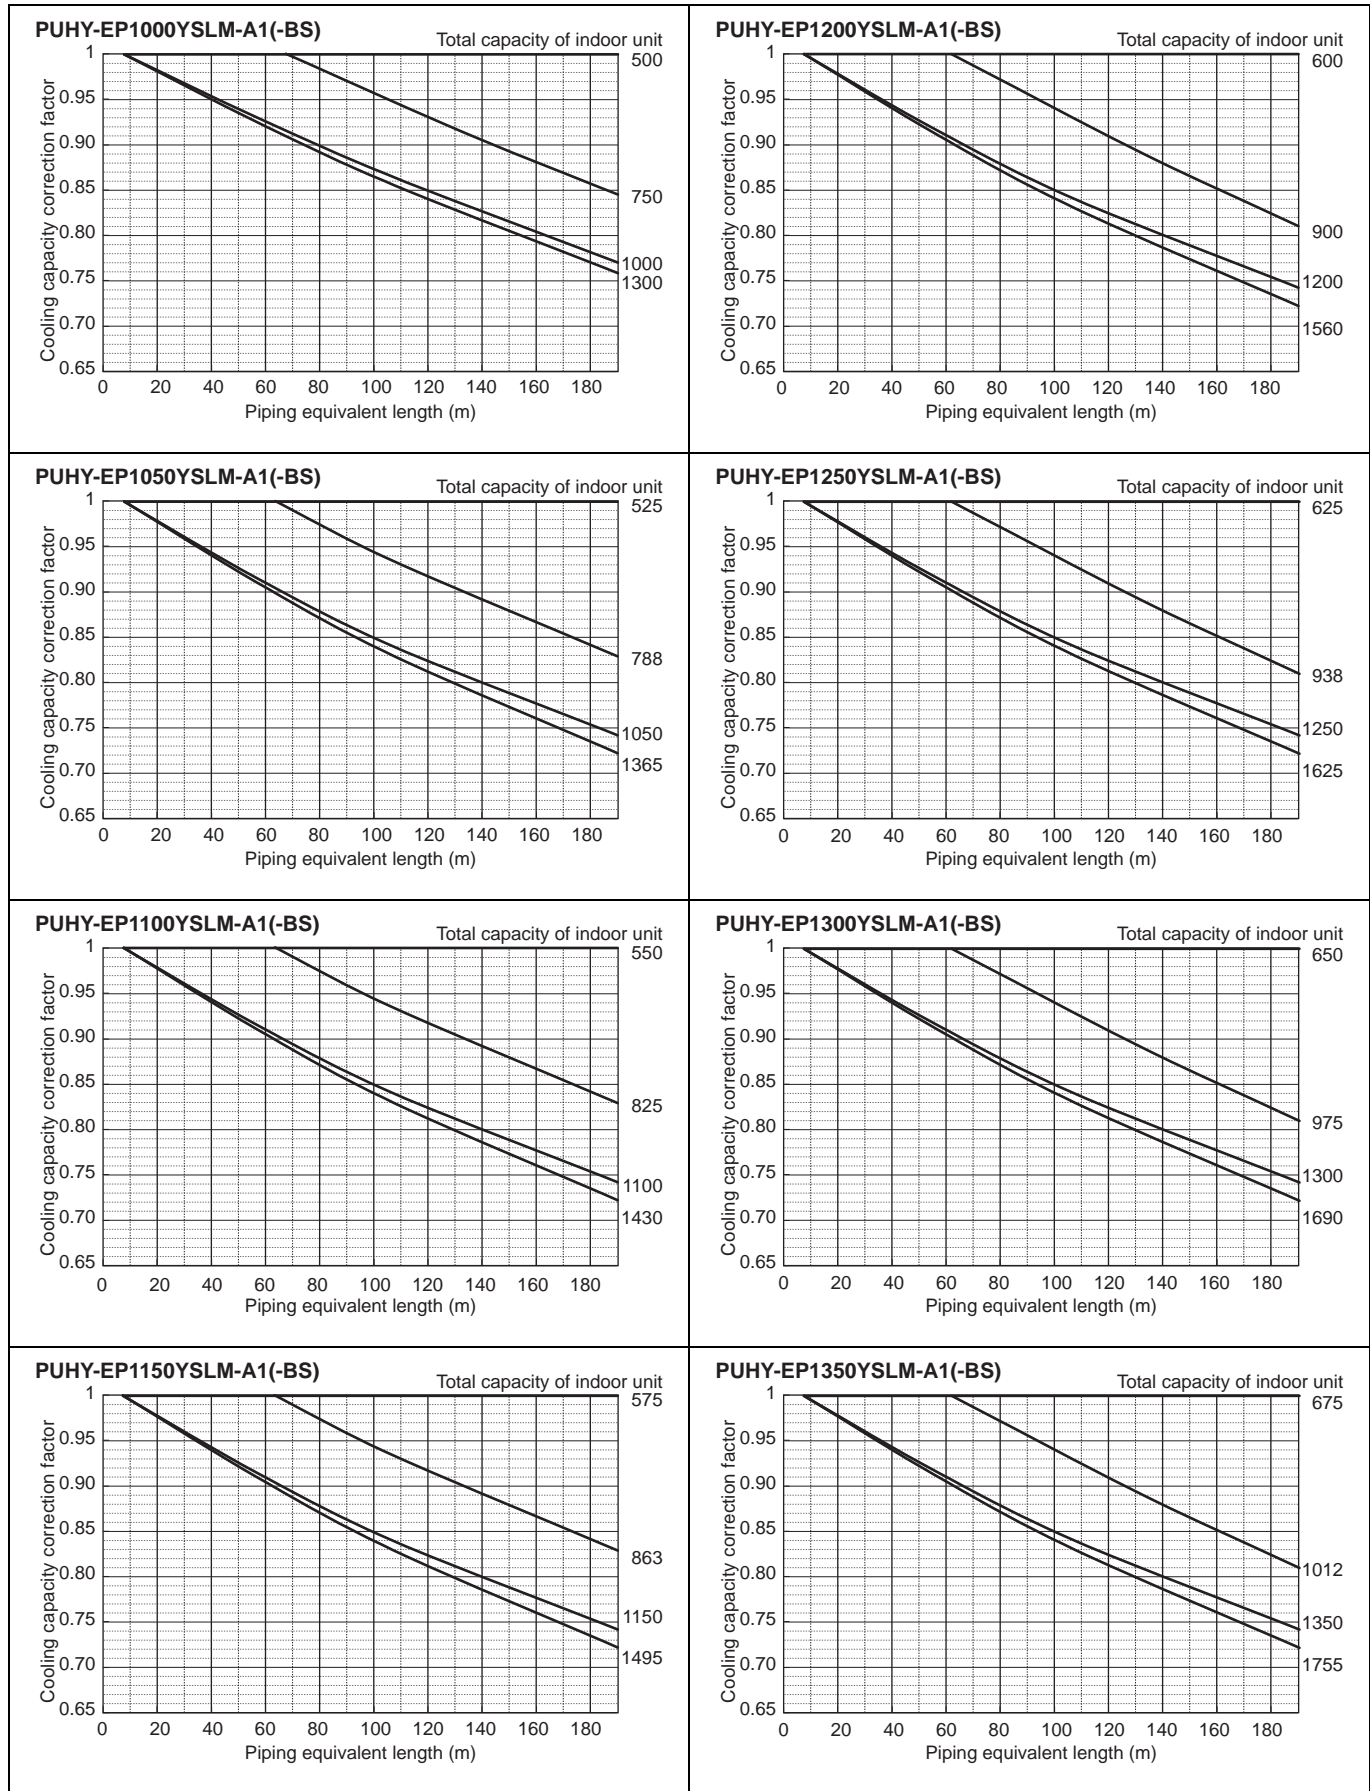

8-4-2. Heating capacity correction

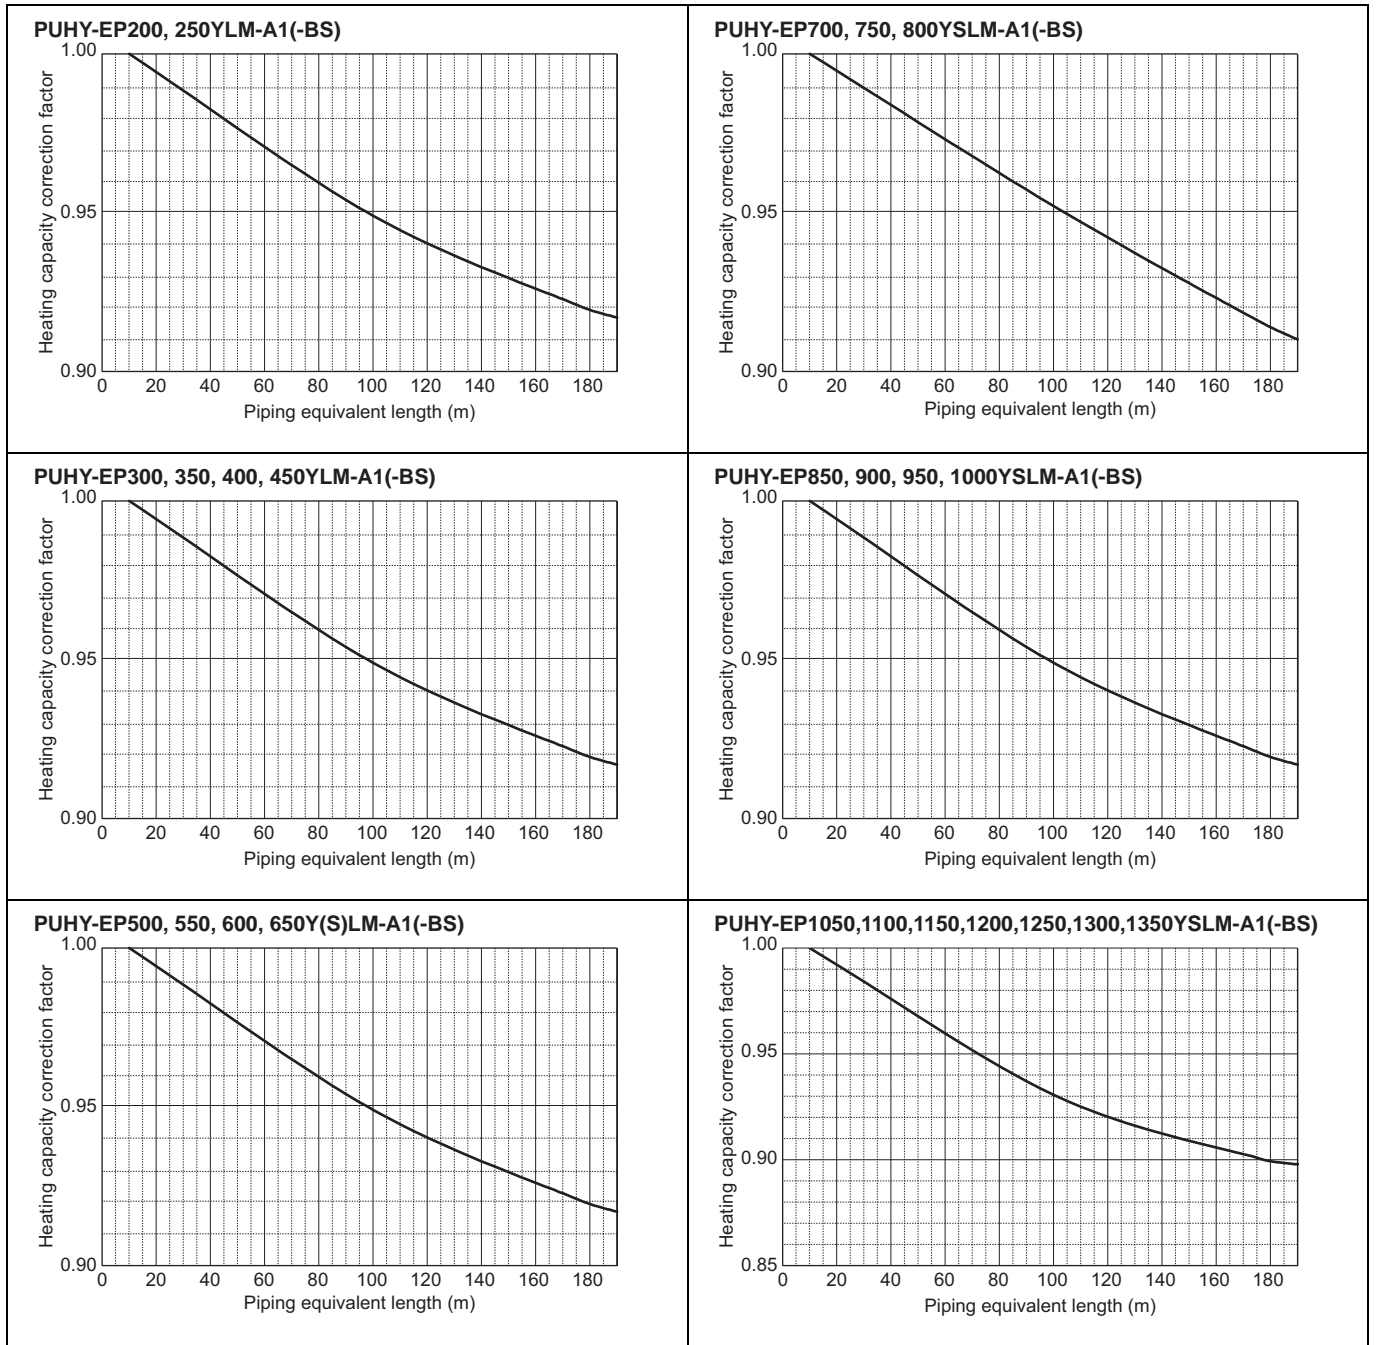

γ (HIGH COP)

8-4-3. How to obtain the equivalent piping length

- 1 **PUHY-EP200YLM-A1(-BS)**
Equivalent length = (Actual piping length to the farthest indoor unit) + (0.42 × number of bends in the piping) m
- 2 **PUHY-EP250YLM-A1(-BS)**
Equivalent length = (Actual piping length to the farthest indoor unit) + (0.42 × number of bends in the piping) m
- 3 **PUHY-EP300YLM-A1(-BS)**
Equivalent length = (Actual piping length to the farthest indoor unit) + (0.47 × number of bends in the piping) m
- 4 **PUHY-EP350YLM-A1(-BS)**
Equivalent length = (Actual piping length to the farthest indoor unit) + (0.47 × number of bends in the piping) m
- 5 **PUHY-EP400, 450, 500, 550, 600, 650Y(S)LM-A1(-BS)**
Equivalent length = (Actual piping length to the farthest indoor unit) + (0.50 × number of bends in the piping) m
- 6 **PUHY-EP700, 750, 800YSLM-A1(-BS)**
Equivalent length = (Actual piping length to the farthest indoor unit) + (0.70 × number of bends in the piping) m
- 7 **PUHY-EP850, 900, 950, 1000, 1050, 1100, 1150, 1200, 1250, 1300, 1350YSLM-A1(-BS)**
Equivalent length = (Actual piping length to the farthest indoor unit) + (0.80 × number of bends in the piping) m

8-5. Correction at frost and defrost

Due to frost at the outdoor heat exchanger and the automatic defrost operation, the heating capacity of the outdoor unit can be calculated by multiplying the correction factor shown in the table below.





Table of correction factor at frost and defrost

Outdoor inlet air temp. °C	6	4	2	1	0	-2	-4	-6	-8	-10	-20
Outdoor inlet air temp. °F	43	39	36	34	32	28	25	21	18	14	-4
PUHY-EP200YLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP250YLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP300YLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP350YLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP400YLM-A1(-BS)	1.00	0.93	0.82	0.80	0.82	0.86	0.90	0.90	0.95	0.95	0.95
PUHY-EP450YLM-A1(-BS)	1.00	0.93	0.82	0.80	0.82	0.86	0.90	0.90	0.95	0.95	0.95
PUHY-EP500YLM-A1(-BS)	1.00	0.93	0.82	0.80	0.82	0.86	0.90	0.90	0.95	0.95	0.95
PUHY-EP550YSLM-A1(-BS)	1.00	0.94	0.87	0.86	0.87	0.88	0.90	0.90	0.93	0.93	0.93
PUHY-EP600YSLM-A1(-BS)	1.00	0.94	0.87	0.86	0.87	0.88	0.90	0.90	0.93	0.93	0.93
PUHY-EP650YSLM-A1(-BS)	1.00	0.94	0.87	0.86	0.87	0.88	0.90	0.90	0.93	0.93	0.93
PUHY-EP700YSLM-A1(-BS)	1.00	0.98	0.89	0.88	0.89	0.90	0.92	0.95	0.95	0.95	0.95
PUHY-EP750YSLM-A1(-BS)	1.00	0.98	0.89	0.88	0.89	0.90	0.92	0.95	0.95	0.95	0.95
PUHY-EP800YSLM-A1(-BS)	1.00	0.98	0.89	0.88	0.89	0.90	0.92	0.95	0.95	0.95	0.95
PUHY-EP850YSLM-A1(-BS)	1.00	0.94	0.87	0.86	0.87	0.88	0.90	0.90	0.93	0.93	0.93
PUHY-EP900YSLM-A1(-BS)	1.00	0.94	0.87	0.86	0.87	0.88	0.90	0.90	0.93	0.93	0.93
PUHY-EP950YSLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP1000YSLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP1050YSLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP1100YSLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP1150YSLM-A1(-BS)	1.00	0.95	0.84	0.825	0.83	0.87	0.90	0.95	0.95	0.95	0.95
PUHY-EP1200YSLM-A1(-BS)	1.00	0.93	0.82	0.80	0.82	0.86	0.90	0.90	0.95	0.95	0.95
PUHY-EP1250YSLM-A1(-BS)	1.00	0.93	0.82	0.80	0.82	0.86	0.90	0.90	0.95	0.95	0.95
PUHY-EP1300YSLM-A1(-BS)	1.00	0.93	0.82	0.80	0.82	0.86	0.90	0.90	0.95	0.95	0.95
PUHY-EP1350YSLM-A1(-BS)	1.00	0.93	0.82	0.80	0.82	0.86	0.90	0.90	0.95	0.95	0.95

Y (HIGH COP)

9-1. JOINT

CITY MULTI units can be easily connected by using Joint sets and Header sets provided by Mitsubishi Electric. Four kinds of Joint sets are available for use. Refer to section 3 in "System Design" or the Installation Manual that comes with the Joint set for how to install the Joint set.

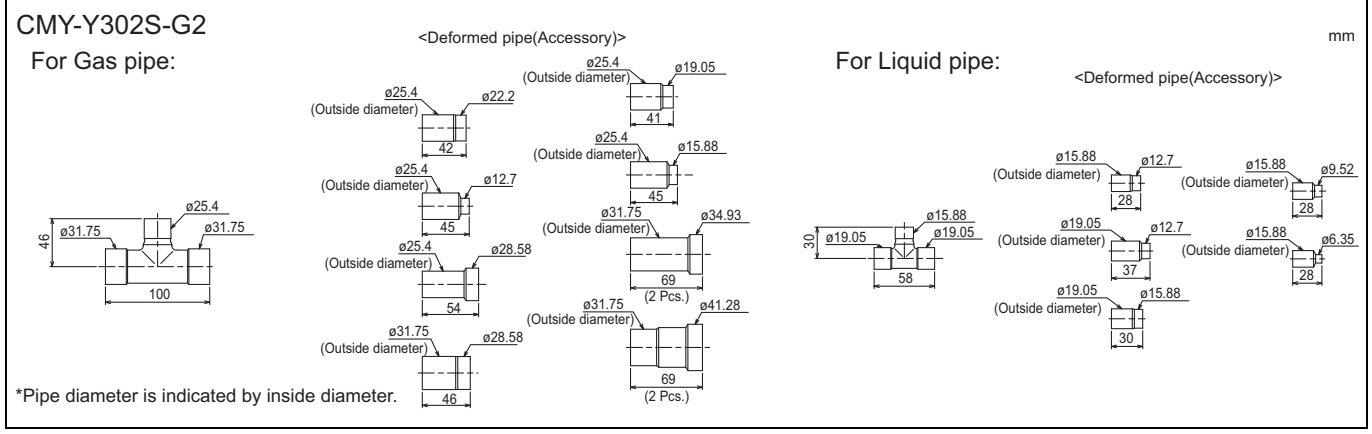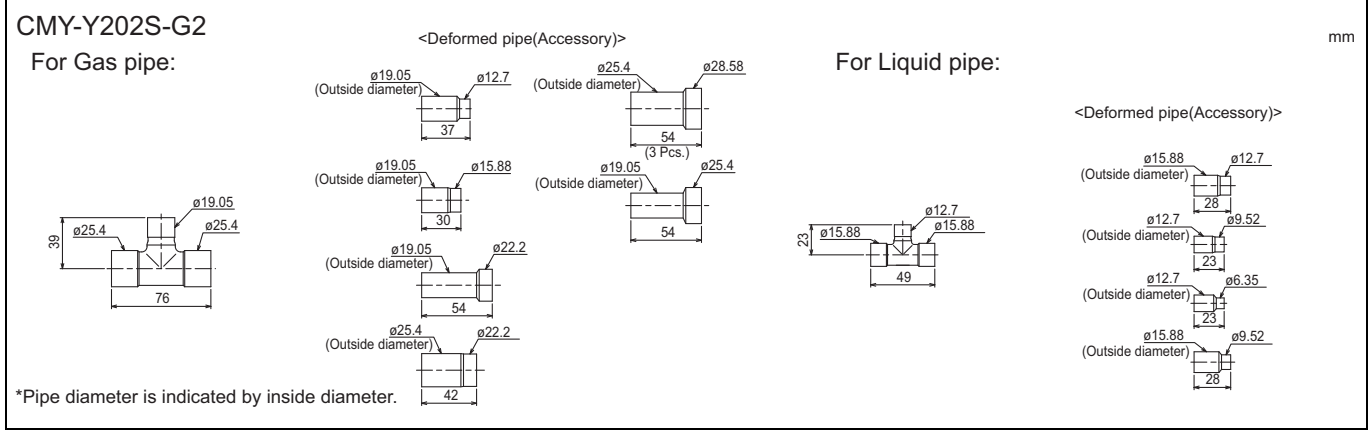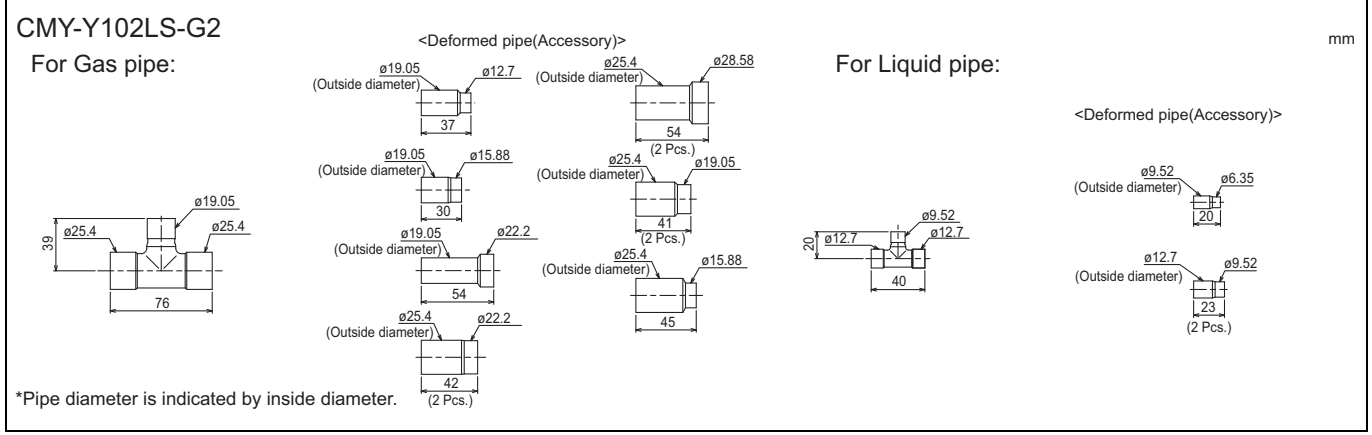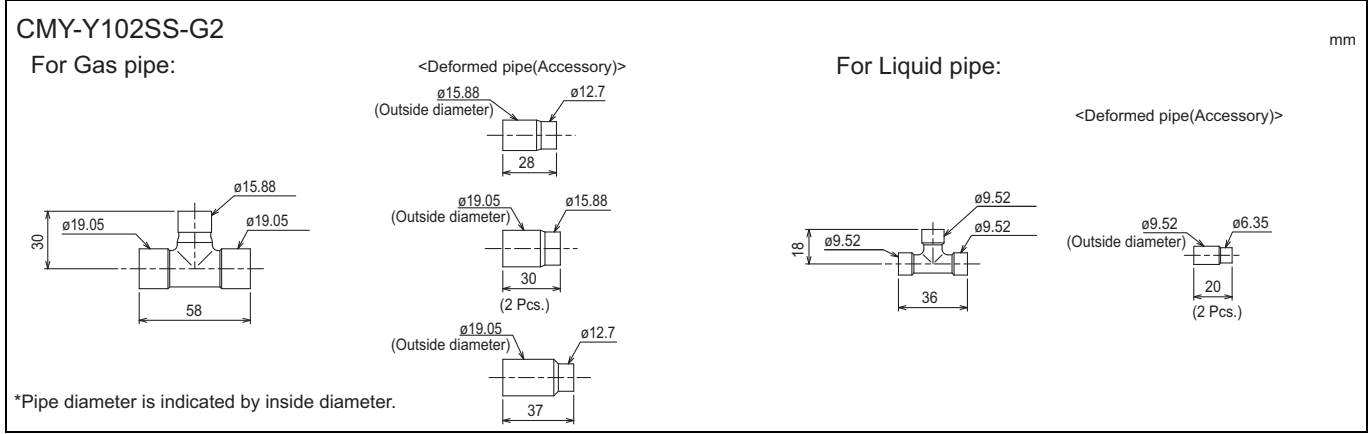

9-2. HEADER

CITY MULTI units can be easily connected by using Joint sets and Header sets provided by Mitsubishi Electric. Three kinds of Header sets are available for use. Refer to section 3 in "System Design" or the Installation Manual that comes with the Header set for how to install the Header set.

Y (HIGH COP)

CMY-Y104-G mm

For Gas pipe:

For Liquid pipe:

Accessories for Gas pipe: <Deformed pipe(Accessory)> (3 Pcs.)

Accessories for Liquid pipe: <Deformed pipe(Accessory)> (3 Pcs.)

ID: Inner Diameter OD: Outer Diameter
 NOTE: Besides above mentioned accessories, caps for pipe of $\phi 6.35$, $\phi 9.52$, $\phi 12.7$, $\phi 15.88$ (each diameter 1 piece) are included in the Header set.

CMY-Y108-G mm

For Gas pipe:

For Liquid pipe:

Accessories for Gas pipe: <Deformed pipe(Accessory)> (5 Pcs.)

Accessories for Liquid pipe: <Deformed pipe(Accessory)> (6 Pcs.)

ID: Inner Diameter OD: Outer Diameter
 NOTE: Besides above mentioned accessories, caps for pipe of $\phi 6.35$, $\phi 9.52$, $\phi 12.7$, $\phi 15.88$ (each diameter 2 pieces) and 1 cap for pipe of $\phi 19.05$ are included in the Header set.

CMY-Y1010-G mm

For Gas pipe:

For Liquid pipe:



Accessories for Gas pipe: <Deformed pipe(Accessory)> (5 Pcs.)

Accessories for Liquid pipe: <Deformed pipe(Accessory)> (5 Pcs.)


ID: Inner Diameter OD: Outer Diameter
 NOTE: Besides above mentioned accessories, caps for pipe of $\phi 6.35$, $\phi 9.52$, $\phi 12.7$, $\phi 15.88$ (each diameter 2 pieces) and 1 cap for pipe of $\phi 19.05$ are included in the Header set.

9-3. OUTDOOR TWINNING KIT

The following optional Outdoor Twinning Kit is needed to use to combine multiple refrigerant pipes. Refer to the chapter entitled System Design Section for the details of selecting a proper twinning kit.

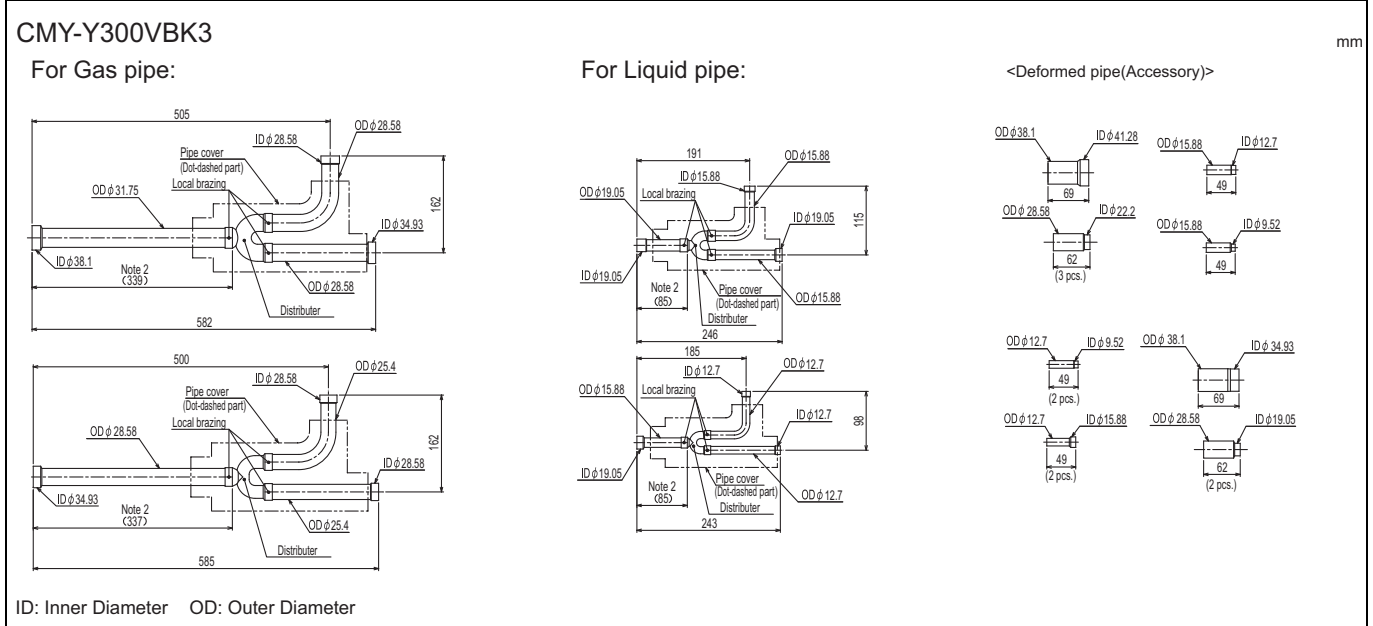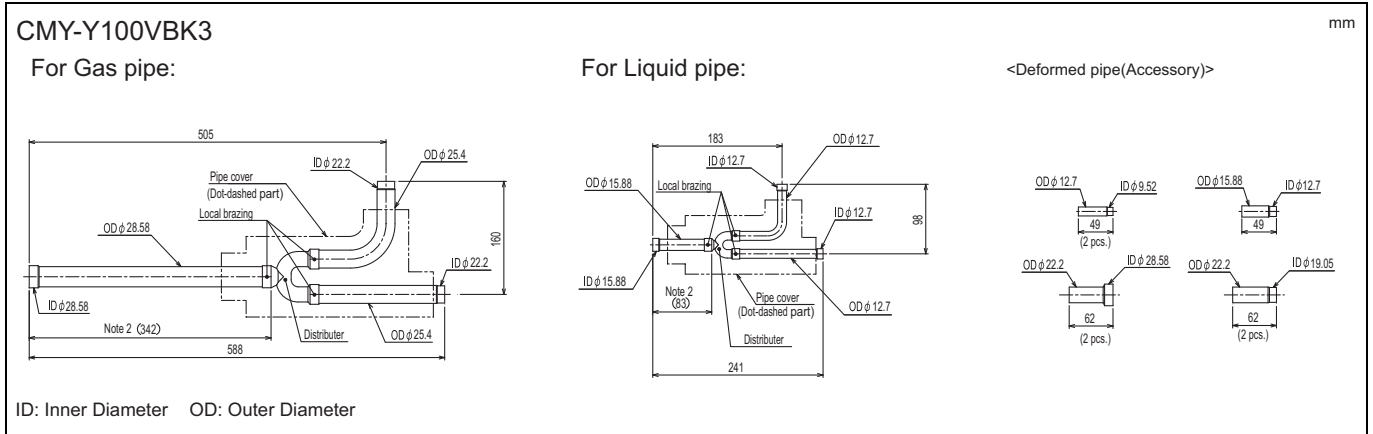

Note 1. Refer to the figure below for the installation position of the twinning pipe.




Slope of the twinning pipes are at an angle within $\pm 15^\circ$ to the horizontal plane.

2. Use the attached pipe to braze the port-opening of the twinning pipe.
3. Pipe diameter is indicated by inside diameter.
4. Only use the twinning pipe by Mitsubishi (optional parts).

9-4. RELAY BOX

If there is a risk that the drain water will freeze inside the outdoor unit, the installation of a base heater is recommended. PAC-BH02KTY-E is a relay box for controlling the electric base heater. For details, refer to the relay box Installation Manual.

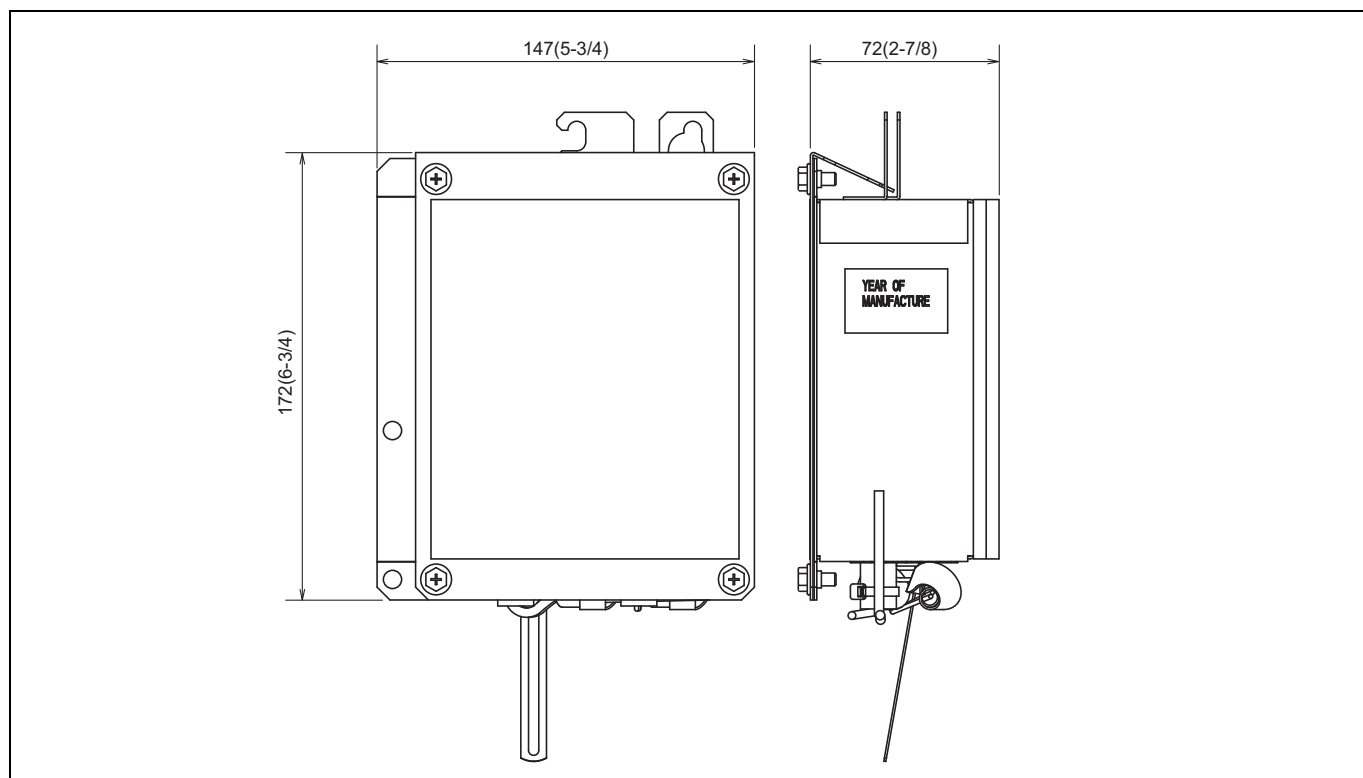


Y (HIGH COP)


9-5. BASE HEATER

If there is a risk that the drain water will freeze inside the outdoor unit, the installation of a base heater is recommended. For details, refer to the base heater Installation Manual.

PAC-BH04EHT-E (for S module)

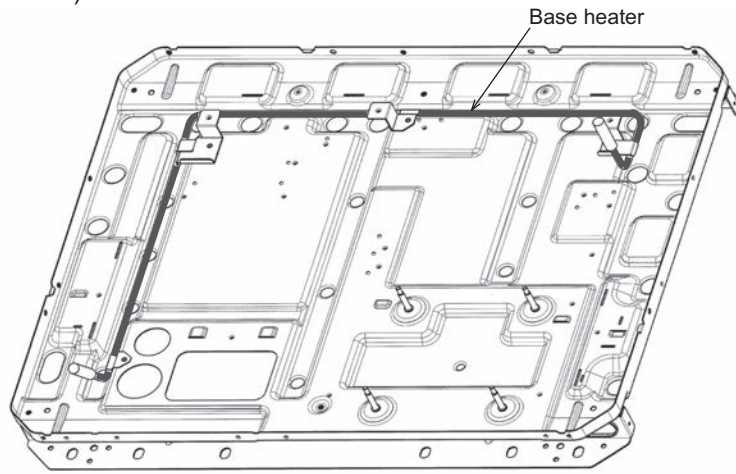

PAC-BH05EHT-E (for L module)

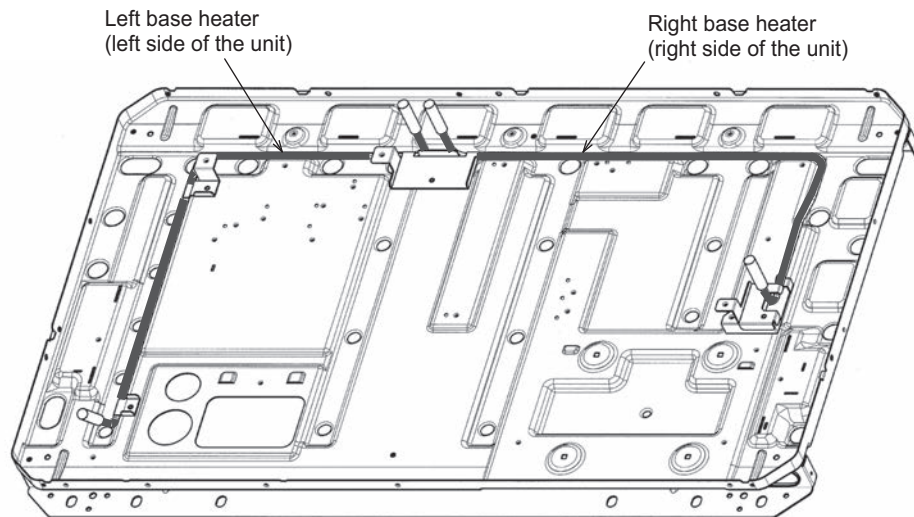

PAC-BH06EHT-E (for XL module)

