## Air Conditioning

#### **Product Information**

PUHY-P1150YSKB-A1 Heat Pump Outdoor Unit Making a World of Difference

CITYMULTI



The City Multi Y Series makes use of a two pipe refrigerant circuit throughout, with branch pipes feeding indoor units, allowing manual changeover from cooling to heating to ensure that a constant indoor climate is maintained.

#### **Key Features**

- Designed from day 1 for seasonal efficiency
- New energy-saving inverter driven compressor with very low start currents
- Reduced standby power by up to 50% using induction heated compressor
- By changing the system evaporating temperature, there are various options for indoor units to offer increased air off temperatures, higher SHF and improved comfort, with the benefit of energy saving
- A choice of standard reverse defrost or a continued supply of heating during the defrost cycle



Air Conditioning | Heating Ventilation | Controls



### **Product Information**


### PUHY-P1150YSKB-A1 Heat Pump Outdoor Unit

Making a World of Difference


# Air Conditioning

PUHY - OUT	DOOR UNIT	PUHY-P1150YSKB-A1
CAPACITY (kW)	Heating (nominal)	145.0
	Cooling (nominal)	130.0
	High Performance Heating (UK)	137.8
	COP Priority Heating (UK)	127.6
	Cooling (UK)	115.4
POWER INPUT (kW)	Heating (nominal)	39.29
, ,	Cooling (nominal)	40.27
	High Performance Heating (UK)	52.45
	COP Priority Heating (UK)	35.75
	Cooling (UK)	24.55
COP / EER (nominal)		3.69 / 3.23
SCOP / SEER (system)		5.33 / 6.44
MAX No. OF CONNECTABLE INDOOR UNITS		50
MAX CONNECTABLE CAPACITY		50-130% OU Capacity
AIRFLOW (m³/min)	High	360 / 210 / 210
PIPE SIZE mm (in)	Gas	41.28 (1-5/8")
	Liquid	19.05 (3/4")
SOUND PRESSURE LEVEL (dBA)		68.5
SOUND POWER LEVEL (dBA)		88.5
WEIGHT (kg)		304 + 251 + 251
DIMENSIONS (mm)	Width	1750 + 1220 + 1220
	Depth	740
(1650mm without leg	s) Height	1710
ELECTRICAL SUPPLY*		380-415v, 50Hz
PHASE*		Three
STARTING CURRENT (A)*		8/8/8
NOMINAL SYSTEM RUNNING CURRENT (A)*		63.0 / 64.5 [37.8+28.2+28.2]
Heating / Cooling [MAX]		
GUARANTEED OPERATING RANGE (°C)		-20~15.5 / -5~52
Heating / Cooling		
FUSE RATING (MCB sizes BS EN 60947-2) - (A)*		1 x 40 / 1 x 32 / 1 x 32
MAINS CABLE No. Cores*		4 + earth

Note: \* A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.





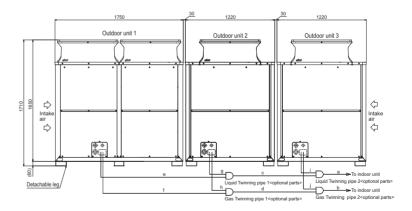



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881 IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland


Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)













Mitsubishi Electric UK's commitment to the environment







