

# Air Conditioning

## Product Information

**Y Series Standard (101-124kW)**  
Heat Pump Outdoor Unit (Heating or Cooling)

Making a  
World of  
Difference

CITY MULTI

**next**  
GENERATION VRF



VRF 2 pipe technology and efficiency providing a simple and flexible solution where there is a demand for a changeover capability between heating and cooling for all indoor units, helping to ensure a constant and comfortable indoor climate.

### Key Features

- Effective, efficient solution meeting all the market needs
- Delivers the highest levels of comfort, both thermally and acoustically
- Cost effective delivery



Cooling | Heating | Ventilation | Controls

# Air Conditioning

## Product Information

### Y Series Standard (101-124kW) Heat Pump Outdoor Unit (Heating or Cooling)

Making a  
World of  
Difference



OUTDOOR UNITS		PUHY-P900YSNW-A	PUHY-P950YSNW-A	PUHY-P1000YSNW-A	PUHY-P1050YSNW-A	PUHY-P1100YSNW-A
CAPACITY (kW)	Heating (nominal)	113	120	127	132	140
	Cooling (nominal)	101	108	113	118	124
	High Performance Heating (UK)	101.7	108.0	114.3	118.8	126.0
	COP Priority Heating (UK)	97.2	103.2	109.2	113.5	120.4
	Cooling (UK)	90.4	96.7	101.1	105.6	111.0
POWER INPUT (kW)	Heating (nominal)	27.9	27.2	30.45	33.3	35.34
	Cooling (nominal)	24.44	26.13	27.74	29.35	31.87
	High Performance Heating (UK)	31.53	30.74	34.41	37.63	39.93
	COP Priority Heating (UK)	27.06	26.38	29.54	32.30	34.28
	Cooling (UK)	15.64	16.72	17.75	18.78	20.40
COP / EER (nominal)		4.04 / 3.97	4.39 / 4.13	4.17 / 4.07	3.96 / 4.02	3.69 / 3.89
SCOP / SEER*		-	-	-	-	-
MAX No. OF CONNECTABLE INDOOR UNITS		50	50	50	50	50
MAX CONNECTABLE CAPACITY		50~130% OU Capacity	50~130% OU Capacity	50~130% OU Capacity	50~130% OU Capacity	50~130% OU Capacity
AIRFLOW (m³/min)	High	305 / 305	185 / 270 / 270	185 / 270 / 300	185 / 300 / 300	270 / 270 / 300
	Low	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")
PIPE SIZE mm (in)	Gas	41.28 (1-5/8")	41.28 (1-5/8")	41.28 (1-5/8")	41.28 (1-5/8")	41.28 (1-5/8")
	Liquid	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")
SOUND PRESSURE LEVEL (dBA)		72.5	68.0	69.5	70.5	70.0
SOUND POWER LEVEL (dBA)		91.5	87.0	88.5	89.5	88.0
WEIGHT (kg)		294 + 294	225 + 278 + 278	225 + 278 + 278	225 + 278 + 278	278 + 278 + 278
DIMENSIONS (mm)	Width	1240 + 1240	920 + 1240 + 1240	920 + 1240 + 1240	920 + 1240 + 1240	1240 + 1240 + 1240
	Depth	740	740	740	740	740
	Height	1858	1858	1858	1858	1858
(1798mm without legs)						
ELECTRICAL SUPPLY*1		380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz
PHASE*1		Three	Three	Three	Three	Three
STARTING CURRENT (A)*1		8	8	8	8	8
NOMINAL SYSTEM RUNNING CURRENT (A)*1 Heating / Cooling [MAX]		43.1 / 39.3 [37.1 + 37.1]	42.0 / 40.3 [17.8 + 26.4 + 26.4]	47.0 / 42.8 [17.8 + 26.4 + 31.9]	51.4 / 45.3 [17.8 + 31.9 + 31.9]	54.6 / 49.2 [26.4 + 26.4 + 31.9]
GUARANTEED OPERATING RANGE (°C) Heating / Cooling		-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52
FUSE RATING (MCB sizes BS EN 60947-2) - (A)*1		1 x 40 / 1 x 40	1 x 20 / 1 x 32 / 1 x 32	1 x 20 / 1 x 32 / 1 x 32	1 x 20 / 1 x 32 / 1 x 32	1 x 32 / 1 x 32 / 1 x 32
MAINS CABLE No. Cores*1		4 + earth / 4 + earth	4 + earth / 4 + earth	4 + earth / 4 + earth / 4 + earth	4 + earth / 4 + earth / 4 + earth	4 + earth / 4 + earth / 4 + earth
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R410A (GWP 2088)		21.6 / 45.1	26.1 / 54.5	26.1 / 54.5	26.1 / 54.5	29.4 / 61.4
MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R410A (GWP 2088)		46.4 / 96.9	45.9 / 95.8	45.9 / 95.8	45.9 / 95.8	45.6 / 95.2

Notes: \*SCOP / SEER available separately in the 'City Multi VRF Seasonal Efficiency' document. Based on Ecodesign Lot 21 / 6 to EN14825 standard.


\*1 A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.

## PRODUCT DIMENSIONS

### PUHY-P900YSNW-A

Side View


Front View



### PUHY-P950/1000/1050YSNW-A

Side View


Front View

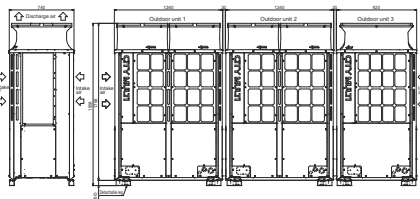

### PUHY-P1100YSNW-A

Side View

Front View

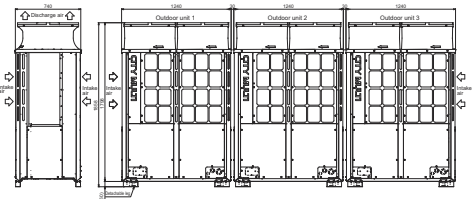

Telephone: 01707 282880

email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)

web: [airconditioning.mitsubishielectric.co.uk](http://airconditioning.mitsubishielectric.co.uk)

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland

Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2017. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows: R410A (GWP:1975), R32 (GWP: 550), R407C (GWP:1650) or R134a (GWP:1300).



[www.greengateway.mitsubishielectric.co.uk](http://www.greengateway.mitsubishielectric.co.uk)

Mitsubishi Electric UK's commitment to the environment

Follow us @meuk\_jes  
Follow us @green\_gateway

Mitsubishi Electric  
Living Environmental Systems UK

mitsubishielectric2

thehub.mitsubishielectric.co.uk

Effective as of November 2017