

Space heating and domestic hot water hydrobox for use with Ecodan split air source heat pumps

The split hydrobox offers a highly adaptable heating solution for retrofit or new build.

Designed specifically by Mitsubishi Electric to integrate with the Ecodan split air source heat pump range and a third party cylinder. The split hydrobox provides hydraulic components with an advanced simplified graphical user interface and controls. Fast commissioning via an SD card and energy monitoring functions are now included.

Key Features

- Simple graphical control
- 2-zone energy efficient space heating control
- Sleek modern design
- Compatible with Mitsubishi Electric wireless room controllers
- Pre-plumbed and wired for faster installation
- Hybrid function, for use with conventional boilers
- SD card commissioning
- Cascade function for multiple unit control
- Energy monitoring as standard



Air Conditioning | Heating
Ventilation | Controls



Heating

Product Information

EHS(D)(C)-MEC

FTC5 Hydroboxes for Ecodan Split Units

Making a
World of
Difference



ADVANCED CONTROLLER – WITH ENERGY MONITORING



Mitsubishi Electric's fifth generation controller (FTC5) includes intelligent room temperature control as standard. This together with advanced weather compensation ensures the system delivers efficient, comfortable heating regardless of the season. FTC5 now also includes energy monitoring showing consumed and produced energy.

HYDROBOX		EHSD-MEC	EHSC-MEC
HEAT PUMP SPACE HEATER - 55°C	ErP Rating	A++	A++ / A++
HEAT PUMP SPACE HEATER - 35°C	ErP Rating	A++	A++ / A++
OPERATING AMBIENT TEMPERATURE (°C DB)		0 ~ +35°C (RH<80%)	0 ~ +35°C (RH<80%)
APPLICABLE OUTDOOR UNITS		PUHZ-SW50VKA(-BS)	PUHZ-SW75VHA(-BS) / PUHZ-SW120VHA(-BS)
SOUND PRESSURE LEVEL AT 1M (dBA)		28	28
WATER DATA	Flow Rate (l/min)	11.8 (SW50)	22.9 (SW75) / 45.9 (SW120)
	Pump	Grundfos UPM2 15 70 - 130	Grundfos UPM2 15 70 - 130
	Connection Size (mm)	28	28
	Primary Expansion Vessel (Litres)	10	10
	Charge Pressure (MPa (Bar))	0.1 (1)	0.1 (1)
WATER SAFETY DEVICES	Control Thermistor (°C)	1 - 80	1 - 80
	Pressure Relief Valve (MPa (Bar))	0.3 (3)	0.3 (3)
	Flow Switch	Supplied	Supplied
DIMENSIONS (mm)	Width	530	530
	Depth	360	360
	Height	800	800
	Weight Empty / Full (kg)	38 / 44	42 / 49
REFRIGERANT	Type	R410A	R410A
	Connection Size - Gas/Liquid (mm (in))	12.7 (1/2") / 6.35 (1/4")	15.88 (5/8") / 9.52 (3/8")
	Connection Type	Flared	Flared
	Electrical Supply	220-240v, 50Hz	220-240v, 50Hz
ELECTRICAL DATA	Control Board - optionally powered by outdoor unit	Phase	Single
		Fuse Rating - MCB Sizes (A)*1	10


OPTIONAL SIMPLIFIED WIRELESS ROOM THERMOSTAT AND WIRELESS RECEIVER

PAR-WT50-E Controller and PAR-WR51-E Receiver

Hydrobox includes: Flow Temperature Controller (FTC5) with Main Controller and Temperature Sensors, Water Circulation Pump, Flow Sensor and Expansion Vessel.

*1 MCB Sizes BS EN60898-2 & BS EN60947-2

DIMENSIONS

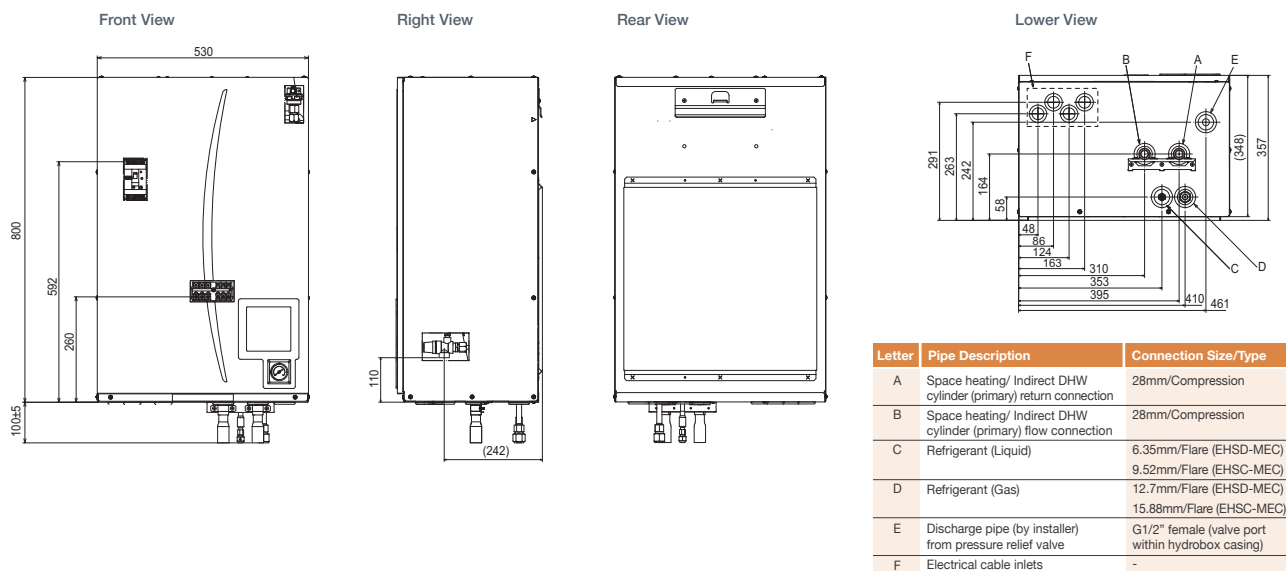

Telephone: 01707 282880

email: heating@meuk.mee.com web: heating.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2015. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.



Printed in August 2015 SAP No. 282699



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment to the environment

Follow us @meuk_ies
Follow us @green_gateway

Mitsubishi Electric
Living Environmental Systems UK

YouTube
youtube.com/mitsubishielectric2