

Air Conditioning

Product Information

PFFY-WP20VLRMM-E
Floor Standing Concealed
Indoor Unit (H-VRF)

Making a
World of
Difference

CITY MULTI



A compact concealed unit providing simple, effective air conditioning in perimeter zones. The unit is easy to install and at only 220mm deep offers an unobtrusive method of delivering highly efficient air-conditioning performance.

Key Features

- Reduced noise levels
- 3 static pressure settings - 20/40/60Pa ideal for ducting in the perimeter zone
- Concealed unit for hidden installation. The unit can be hidden behind a wardrobe in a hotel, then ducted above and below the wardrobe doors - this offers lower noise, less disruption and a low visual impact



Air Conditioning | Heating
Ventilation | Controls

Air Conditioning


Product Information

PFFY-WP20VLRMM-E Floor Standing Concealed Indoor Unit (H-VRF)

Making a
World of
Difference

PFFY - INDOOR UNIT		PFFY-WP20VLRMM-E
CAPACITY (kW)	Heating (nominal)	2.5
	Cooling (nominal)	2.2
	UK Heating	2.5
	UK Total Cooling - Hi (Sensible)	2.00 (1.50)
	UK Total Cooling - Mi1	1.96
	UK Total Cooling - Lo	1.83
POWER INPUT (kW)	Heating (nominal)	0.04
	Cooling (nominal)	0.04
AIRFLOW (l/s)	Lo-Mi-Hi	75-83-100
EXTERNAL STATIC PRESSURE (Pa)		20-40-60
SOUND PRESSURE LEVEL (dBA) Lo-Mi1-Hi		31-33-38
WEIGHT (kg)		22
	DIMENSIONS (mm)	
	Width	886
	Depth	220
	Height	639
ELECTRICAL SUPPLY		220-240v, 50Hz
PHASE		Single
RUNNING CURRENT (A)	Heating / Cooling	0.35 / 0.35
FUSE RATING (BS88) - HRC (A)		6
MAINS CABLE No. Cores		3


Notes:
H-VRF indoor units can only be configured with the CMB-WP HBC (H-VRF) and PURY-(E)P YLM-A or PQRY-P YLM outdoor units. Indoor unit water connections 3/4" BSP screw.

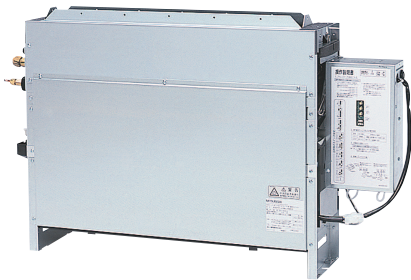

Dimensions

Model	A	B	C	D	E	F	G	① Water pipe (To HBC unit)	② Water pipe (From HBC unit)
PFFY-WP20VLRMM-E	886	640	572	610	360	4	660	Rc3/4 screw	
PFFY-WP25VLRMM-E	1006	760	692	730	480	5	780		
PFFY-WP32VLRMM-E	1126	880	812	850	560	6	900		
PFFY-WP40VLRMM-E	1246	1000	932	970	640	7	1020		

DIMENSIONS

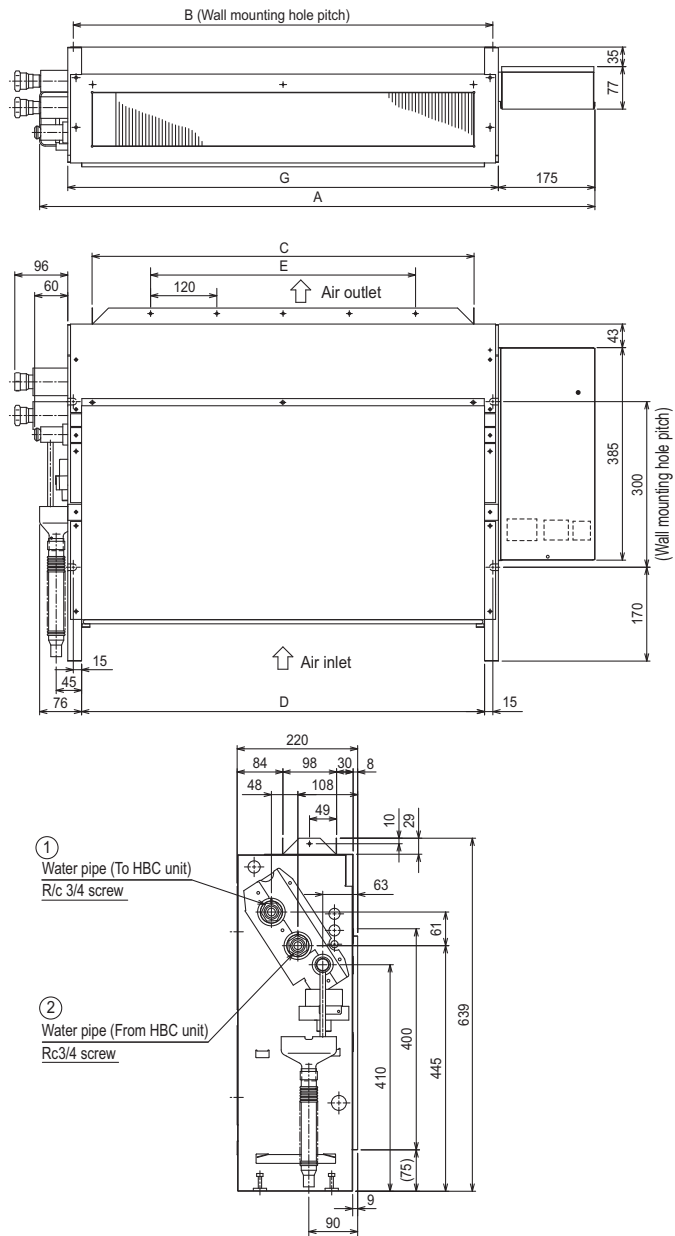

Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2016. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.



Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning and heat pump systems contain fluorinated greenhouse gases R410A, R407C and R134a.



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment to the environment

Follow us @meuk_Jes
Follow us @green_gateway

Mitsubishi Electric
Living Environmental Systems UK

YouTube
mitsubishielectric2

Effective as of February 2016