

# Air Conditioning

## Product Information

### R410A HVRF R2 Series High Efficiency (22.4-56kW)

Simultaneous Heating and Cooling  
with Heat Recovery Outdoor Unit

Making a  
World of  
Difference

CITY MULTI



Throughout the year, many buildings require cooling in some areas and heating in others - even in adjacent rooms. The outstanding City Multi R2 system meets these requirements by distributing surplus heat from cooling operations (and vice versa) to rooms where it is needed. This efficiency can result in energy savings up to 30% over conventional systems.

#### Key Features

- Highest specification, highest efficiency heat recovery system available
- Delivers the highest levels of comfort, both thermally and acoustically
- Flexible design, installation and maintenance



Cooling | Heating | Ventilation | Controls

# Air Conditioning

## Product Information

**R410A HVRF R2 Series**  
**High Efficiency (22.4-56kW)**  
 Simultaneous Heating and Cooling  
 with Heat Recovery Outdoor Unit

Making a  
 World of  
 Difference




OUTDOOR UNITS		PURY-EP200YNW-A	PURY-EP250YNW-A	PURY-EP300YNW-A	PURY-EP350YNW-A X 2HBC	PURY-EP350YNW-A	PURY-EP350YNW-A X 2HBC	PURY-EP400YNW-A	PURY-EP450YNW-A	PURY-EP500YNW-A
CAPACITY (kW)	Heating (nominal)	25.0	31.5	37.5	37.5	45.0	45.0	50.0	56.0	58.0
	Cooling (nominal)	22.4	28.0	33.5	33.5	40.0	40.0	45.0	50.0	56.0
	High Performance Heating (UK)	25.0	31.5	35.6	35.6	42.8	42.8	47.5	50.4	52.2
	COP Priority Heating (UK)	22.8	28.7	32.3	32.3	38.7	38.7	43.0	49.3	51.0
	Cooling (UK)	20.1	25.1	30.0	30.0	35.8	35.8	40.3	44.8	50.1
POWER INPUT (kW)	Heating (nominal)	6.92	9.84	11.71	11.12	15.38	14.28	14.12	16.86	21.67
	Cooling (nominal)	6.27	8.77	12.05	10.24	17.16	13.98	13.88	16.83	21.22
	High Performance Heating (UK)	8.72	12.40	15.57	14.79	20.46	18.99	18.78	19.22	24.70
	COP Priority Heating (UK)	6.92	9.84	11.36	10.79	14.92	13.85	13.70	15.51	19.94
	Cooling (UK)	3.64	5.09	7.71	6.55	10.98	8.95	8.88	10.43	13.16
COP / EER (nominal)	3.61 / 3.57	3.20 / 3.19	3.2 / 2.78	3.37 / 3.27	2.92 / 2.33	3.15 / 2.86	3.54 / 3.24	3.32 / 2.97	2.9 / 2.63	-
SCOP / SEER*	-	-	-	-	-	-	-	-	-	-
MAX No. OF CONNECTABLE INDOOR UNITS		20	25	30	30	35	35	40	45	50
MAX CONNECTABLE CAPACITY		50-150% OU Capacity	50-150% OU Capacity	50-150% OU Capacity	50-150% OU Capacity	50-150% OU Capacity	50-150% OU Capacity	50-150% OU Capacity	50-150% OU Capacity	50-150% OU Capacity
AIRFLOW (m³/min)	High	170	185	240	240	250	250	315	315	295
	Gas	19.05 (3/4")	22.2 (7/8")	22.2 (7/8")	22.2 (7/8")	28.58 (1-1/8")	28.58 (1-1/8")	28.58 (1-1/8")	28.58 (1-1/8")	28.58 (1-1/8")
PIPE SIZE mm (in)	Liquid	15.88 (5/8")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	19.05 (3/4")	22.2 (7/8")	22.2 (7/8")	22.2 (7/8")
	SOUND PRESSURE LEVEL (dBA)	59.0	61.0	67.0	67.0	64.0	64.0	69.0	70.0	64.5
SOUND POWER LEVEL (dBA)	78.0	80.0	86.5	86.5	83.0	83.0	88.0	89.0	84.0	
WEIGHT (kg)		234	234	236	236	279	279	282	306	345
DIMENSIONS (mm)	Width	920	920	920	920	1240	1240	1240	1240	1750
	Depth	740	740	740	740	740	740	740	740	740
	Height	1858	1858	1858	1858	1858	1858	1858	1858	1858
ELECTRICAL SUPPLY <sup>1)</sup>		380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz	380-415v, 50Hz
PHASE <sup>1)</sup>		Three	Three	Three	Three	Three	Three	Three	Three	Three
STARTING CURRENT (A) <sup>1)</sup>		8	8	8	8	8	8	8	8	8
NOMINAL SYSTEM RUNNING CURRENT (A) <sup>1)</sup> Heating/Cooling [MAX]		10.6 / 9.6 [16.1]	15.2 / 13.5 [17.0]	18.1 / 18.6 [20.3]	17.1 / 15.8 [20.3]	23.7 / 26.5 [24.4]	22.0 / 21.6 [24.4]	21.8 / 21.4 [30.7]	26 / 26 [34.6]	33.4 / 32.8 [40.3]
GUARANTEED OPERATING RANGE (°C) Heating / Cooling		-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52	-20~-15.5 / -5~-52
FUSE RATING (MCB sizes BS EN 60947-2) - (A) <sup>1)</sup>		1 x 20	1 x 20	1 x 25	1 x 25	1 x 25	1 x 25	1 x 32	1 x 40	1 x 50
MAINS CABLE No. Cores <sup>1)</sup>		4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth	4 + earth
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R410A (GWP 2088)		5.2 / 10.9	5.2 / 10.9	5.2 / 10.9	5.2 / 10.9	8 / 16.7	8 / 16.7	8 / 16.7	10.8 / 22.5	10.8 / 22.6
MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) R410A (GWP 2088)		28.3 / 59.1	34.3 / 71.6	34.3 / 71.6	34.3 / 71.6	39 / 81.4	39 / 81.4	39 / 81.4	44.7 / 93.3	45.2 / 94.4


Notes: \*SEER/SCOP available separately in the 'City Multi VRF Seasonal Efficiency' document. Based on Ecodesign Lot 21/6 to EN14825 standard.  
<sup>1)</sup> A separate power supply is required for each module. Where more than one figure is quoted there are multiple modules.

### PRODUCT DIMENSIONS


#### PURY-EP200/250/300YNW-A



#### PURY-EP350/400/450YNW-A



#### PURY-EP500YNW-A

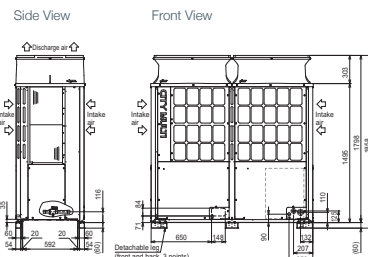

Telephone: 01707 282880  
 email: air.conditioning@meuk.mee.com  
 web: les.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division  
 Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881  
 IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland  
 Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2018. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows: R410A (GWP:1975), R32 (GWP: 550), R407C (GWP:1650) or R134a (GWP:1300).



www.greengateway.mitsubishielectric.co.uk  
 Mitsubishi Electric UK's commitment  
 to the environment

- Follow us @meuk\_Jes  
 Follow us @green\_gateway
- Mitsubishi Electric  
 Living Environmental Systems UK
- mitsubishielectric2
- thehub.mitsubishielectric.co.uk



Effective as of April 2018