



Weather-proof Lossnay housings

A range of weather-proof housings have been designed to enable outdoor installation of the entire Mitsubishi Electric Lossnay mechanical heat recovery ventilation range to be installed either on the roof or at ground level.

Mitsubishi Electric's Lossnay allows the extraction of stale air and efficient recovery of heating or cooling energy to treat incoming fresh air. Whatever your environment it's simple to improve it with Lossnay. The weather-proof Lossnay housing is ideal for any application where indoor space is limited or restrictive.


Key Features

- High quality galvanised steel construction
- Epoxy painted
- Custom paint finishes available on request
- Simple to construct in situ



Weather-proof Lossnay housings

Weather-proof Lossnay Housings are manufactured from high quality powder coated galvanised steel. The housings are supplied flat-packed.

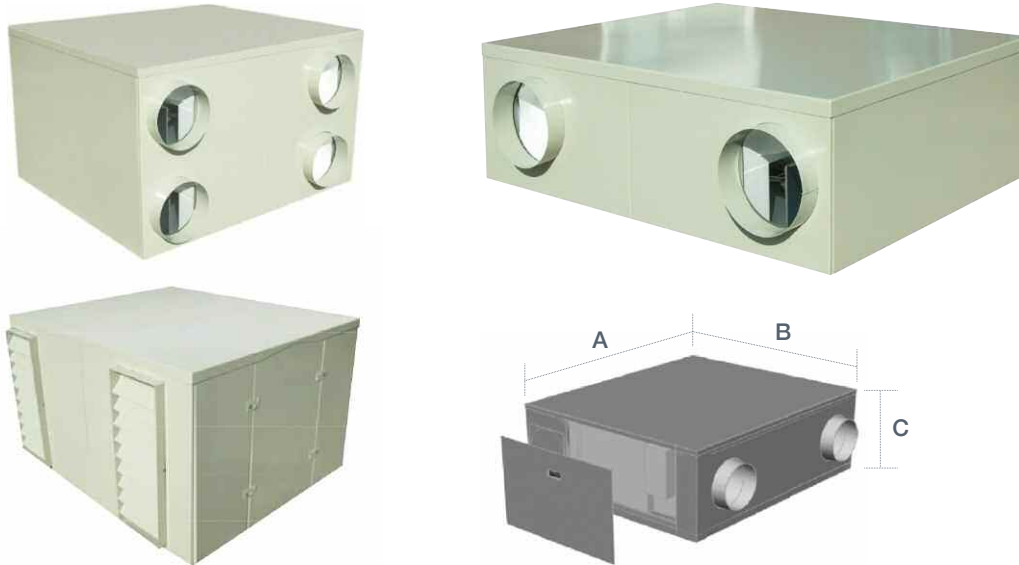

Model	Lossnay Unit	A (mm)	B (mm)	C (mm)	weight (kg)
KS4-KWH25RVX	LGH-25RVX-E	879	798	342	23.5
KS4-KWH35RVX	LGH-35RVX-E	1012	910	383	23.5
KS4-KWH50RVX	LGH-50RVX-E	1160	910	367	24.5
KS4-KWH65RVX	LGH-65RVX-E	1094	926	455	28.5
KS4-KWH80RVX	LGH-80RVX-E	1150	1164	454	35.5
KS4-KWH100RVX	LGH-100RVX-E	1371	1163	454	41.88
KS4-KWH150RVX	LGH-150RVX-E	1150	1164	857	52
KS4-KWH200RVX	LGH-200RVX-E	1371	1164	857	57




Telephone: 01707 282880
email: air.conditioning@meuk.mee.com
web: airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)



www.greengateway.mitsubishielectric.co.uk
Mitsubishi Electric UK's commitment
to the environment



Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2017. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP: 550), R407C (GWP:1650) or R134a (GWP:1300).

