

Air Conditioning

Product Information

VL-100U5-E : LOSSNAY

Residential Model



Particularly suitable for small offices with high insulation which require ventilation to remove stale air without major heat loss.

FEATURES




LOSSNAY

Airflow (m ³ /h) - Lo-Hi	61-106
Sound Pressure Level (dBA) - Lo-Hi	27-38
Electrical Supply	220-240V, 50HZ
Fuse Rating (BS88) - HRC (A)	6
Power Input (W) - Lo-Hi	17-34
Temperature Exchange Efficiency (%) - Lo-Hi	79-72
Dimensions (mm) - W-D-H	620-200-265
Weight (kg)	7.5
Duct Size (mm)	2X75

DIMENSIONS

VL-100U5-E

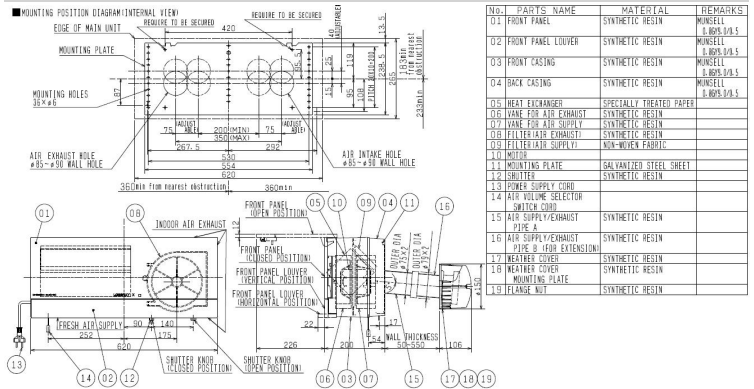

NO.	PARTS NAME	MATERIAL	REMARKS
01	FRONT PANEL	SYNTHETIC RESIN	MUNSELL J.BPS/D/S
02	FRONT PANEL LLOUVER	SYNTHETIC RESIN	MUNSELL J.BPS/D/S
03	FRONT CASING	SYNTHETIC RESIN	MUNSELL J.BPS/D/S
04	BACK CASING	SYNTHETIC RESIN	MUNSELL J.BPS/D/S
05	HEAT EXCHANGER	SPECIALLY TREATED PAPER	
06	VALVE FOR AIR EXHAUST	SYNTHETIC RESIN	
07	VALVE FOR AIR SUPPLY	SYNTHETIC RESIN	
08	FILTER (AIR EXHAUST)	SYNTHETIC RESIN	
09	FILTER (AIR SUPPLY)	NON-WOVEN FABRIC	
10	WIPER		
11	MOUNTING PLATE	SALVAGED STEEL SHEET	
12	SHUTTER	SYNTHETIC RESIN	
13	POWER SUPPLY CORD		
14	AIR SUPPLY SELECTOR SWITCH KNOB		
15	AIR SUPPLY/EXHAUST PIPE A	SYNTHETIC RESIN	
16	AIR SUPPLY/EXHAUST PIPE B LEAD EXTENSION	SYNTHETIC RESIN	
17	WEATHER COVER	SYNTHETIC RESIN	
18	WEATHER COVER	SYNTHETIC RESIN	
19	MOUNTING PLATE	SYNTHETIC RESIN	