



PCA-RP50GA2

Power Inverter Heat Pump

R410A Ceiling Suspended System

Advanced inverter technology makes the Mr Slim Power Inverter the number one choice for improving comfort. They provide energy savings of up to 70% annually when compared to a previous non-inverter model. Operating noise has also been reduced thanks to improvements in fan design, while existing pipe work is reusable for easier maintenance and installation.

- Indoor unit designed for direct ceiling suspension
- Flush to wall installation for concealment of service connections
- Electronic control includes learning defrost, fault finding diagnostics, low ambiet fan speed control and antiphase/single phase protection







Pictures not to scale

Product Details

PUHZ-RP50VHA3 Outdoor Unit

Noise (dBA) (Heating /Cooling)

Fuse Rating (BS88) - HRC (A)

SystemPower Input (kW) - Heating (Nominal)

SystemPower Input (kW) - Cooling (Nominal)

SystemRunning Current (A) - Heating / Cooling

SystemPower Input (kW) - Heating (UK)

SystemPower Input (kW) - Cooling (UK)

Width - mm

Depth - mm

Height - mm

Weight - kg

Phase

Electrical Supply

Starting Current (A)

Mains Cable No. Cores

Max Height Difference (m)

Max Pipe Length (m)


Charge (kg) - 30m

PCA-RP50GA2 Indoor Unit	
Capacity (kW):	
Heating (Nominal) (Low - High)	6.00 (2.50 - 7.30)
Cooling (Nominal) (Low - High)	5.00 (2.30 - 5.60)
Heating (UK) (Low - High)	5.10 (2.15 - 6.20)
Cooling (UK) (Low - High)	4.50 (2.05 - 5.05)
SHF R410A (Nominal)	0.88
COP / EER (Nominal)	3.41 / 3.01
Energy Label Heating / Cooling	B/B
Width - mm	1310
Depth - mm	680
Height - mm	210
Weight - kg	34
Airflow (m3/min) - Lo-Mi1-Mi2-Hi	14-15-16-18
Noise (dBA) - Lo-Mi1-Mi2-Hi	37-39-41-43
Pipe Size Gas mm (in)	12.7 (1/2)
Pipe Size Liquid mm (in)	6.35 (1/4)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4
Remote Controller Ref	PAR-21MAA


Dimensions

PCA-RP50GA2

Front View >

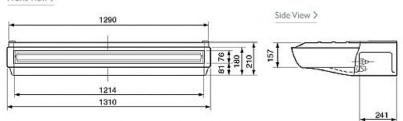

Lower View >

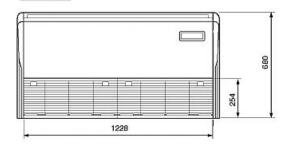

PUHZ-RP50VHA3

800

600

42

46/44

Single

16

1.76

1.66

1.57

1.41

7/6.69

5


3

50


30 2.5

220-240v, 50Hz

300 + 23

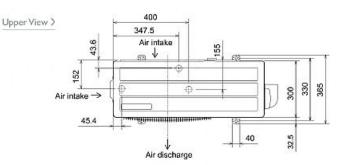

Side View >

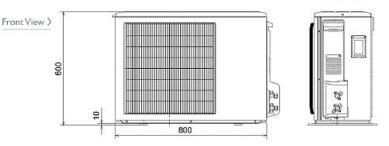



Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



Tel: Fax: