



PEAD-RP125JAQ

Standard Inverter Heat Pump

R410A Ceiling Concealed Ducted System

The new Standard Inverter range provides inverter solutions for customers who want all the benefits that inverters offer, but do not have the budget available for the more expensive Power Inverter range.



Pictures not to scale

Product Details

PEAD-RP125JAQ Indoor Unit

Capacity (kW):	
Heating (Nominal) (Low - High)	14.00 (5.00 - 16.00)
Cooling (Nominal) (Low - High)	12.30 (5.50 - 14.00)
Heating (UK) (Low - High)	11.90 (4.25 - 13.60)
Cooling (UK) (Low - High)	11.30 (5.05 - 12.90)
SHF R410A (Nominal)	0.85
COP / EER (Nominal)	3.62 / 2.91
Energy Label Heating / Cooling	A / C
Width - mm	1400
Depth - mm	732
Height - mm	250
Weight - kg	43
Airflow (m ³ /min) - Lo-Mi-Hi	29.5-33.5-42
External Static Pressure Pa - Lo-Mid-Hi	35-70-150
Noise (dBA) - Lo-Mi-Hi	33-36-40
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4


PUHZ-P125YHA Outdoor Unit

Width - mm	950
Depth - mm	330+30
Height - mm	1350
Weight - kg	101
Noise (dBA) (Heating /Cooling)	55 /48-51
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	16
SystemPower Input (kW) - Heating (Nominal)	3.87
SystemPower Input (kW) - Cooling (Nominal)	4.22
SystemPower Input (kW) - Heating (UK)	3.44
SystemPower Input (kW) - Cooling (UK)	3.59
Starting Current (A)	4
SystemRunning Current (A) - Heating / Cooling	6.29 / 6.85
Mains Cable No. Cores	5
Max Pipe Length (m)	50
Max Height Difference (m)	30
Charge (kg) - 30m	4.5


Dimensions

PEAD-RP125JAQ


Front View >

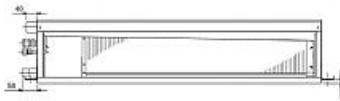


Rear View >



Upper View >




Side View >

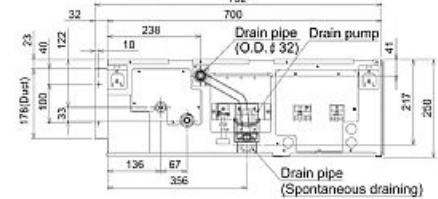


PUHZ-P125YHA

Upper View >

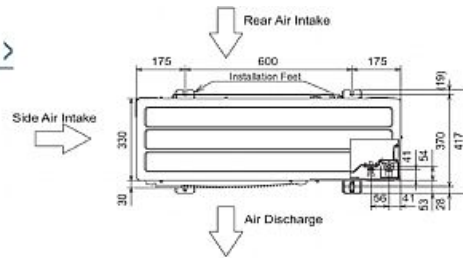

	A
PUHZ-P125/140YHA3	1076
PUHZ-P125/140YHA	994

Front View >

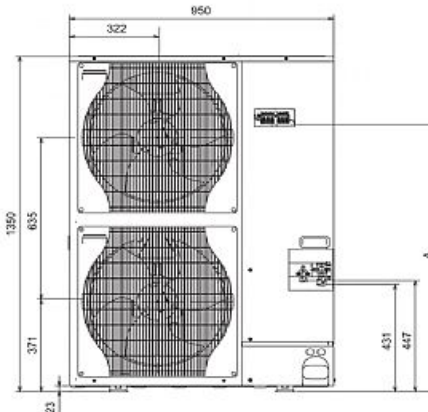

Side View >



Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Tel:
Fax:



Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.