



PEH-P400MYA

Heat Pump

R407c Large Capacity Ceiling Concealed Ducted System

- Twin, triple or quadruple configurations, utilising Mr Slim indoor units
- Static pressure of up to 150Pa
- Two PUH-P200MYA outdoor units are required



Pictures not to scale

Product Details

PEH-P400MYA Indoor Unit


Capacity (kW):	
Heating (Nominal)	47.4
Cooling (Nominal)	41.8
Heating (UK)	40.3
Cooling (UK)	37.6
SHF R407c (Nominal)	0.81
Width - mm	1690
Depth - mm	865
Height - mm	706
Weight - kg	180
External Static Pressure Pa	150
Noise (dBA)	55
Pipe Size Gas mm (in)	28.58 (1 1/8)
Pipe Size Liquid mm (in)	12.7 (1/2)
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	10
Power Input (kW) - Heating (Nominal)	2.3
Power Input (kW) - Cooling (Nominal)	2.3
Power Input (kW) - Heating (UK)	2.05
Power Input (kW) - Cooling (UK)	2.05
Starting Current (A)	10
Running Current (A) - Heating / Cooling	4.1 / 4.1
Interconnecting Cable No. Cores	3
Mains Cable No. Cores	5
Remote Controller Ref	PAR-21MAA

PUH-P200MYA Outdoor Unit


Width - mm	990
Depth - mm	840
Height - mm	1715
Weight - kg	215
Noise (dBA)	56
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	32
Power Input (kW) - Heating (Nominal)	7.17
Power Input (kW) - Cooling (Nominal)	7.27
Power Input (kW) - Heating (UK)	6.38
Power Input (kW) - Cooling (UK)	6.18
Starting Current (A)	109
Running Current (A) - Heating / Cooling	12.8 / 13
Mains Cable No. Cores	5
Max Pipe Length (m)	50
Max Height Difference (m)	40
Charge (kg)	6

Dimensions

PEH-P400MYA

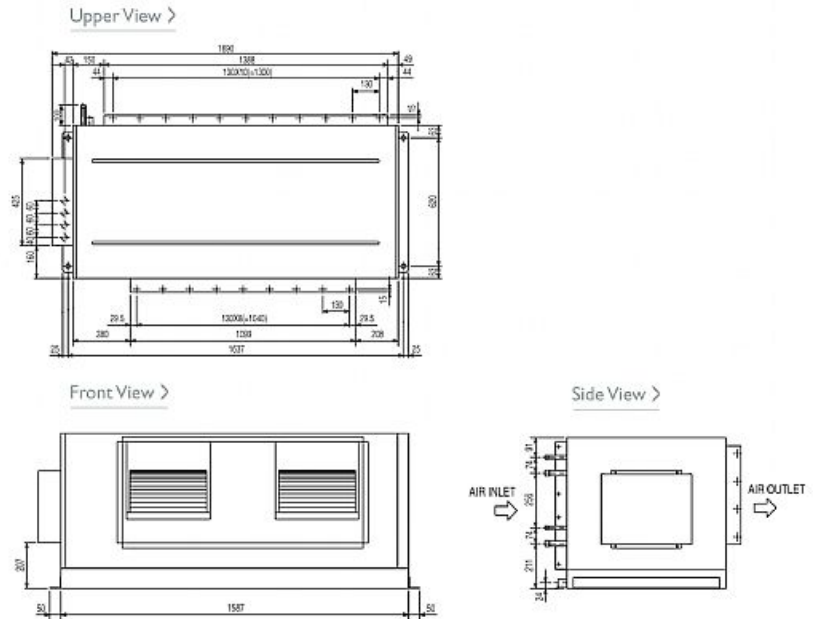

PUH-P200MYA

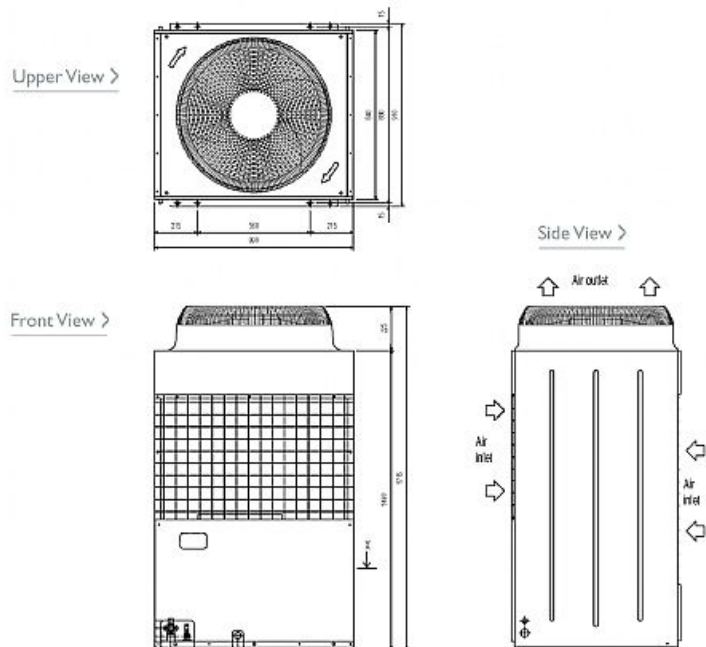

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

