

Air Conditioning

Product Information

PKA-M R32 Power Inverter Heat Pump
Wall Mounted System
(Three Phase)

Making a
World of
Difference

Mr.SLIM™



The PKA-M Power Inverter range is a wall mounted system that blends a host of outstanding features with a sophisticated streamlined design. Offering high seasonal efficiency, advanced control options and extended pipe runs, this range is extremely flexible and utilises low GWP R32 refrigerant.

Key Features

- Flat panel, compact design
- Improved airflow control, including adjustable louvres for uniform air distribution
- Internal pipe connection to wall mounted unit for easy and neat installation
- Highly energy efficient operation, utilising low GWP R32 refrigerant
- Quiet operation with industry leading low noise levels
- CN22 connector as standard for connection to PAR-33MAA hard wired controller
- Full heating capacity down to -3°C
- 100m pipe run
- Replace Technology available



Air Conditioning | Heating
Ventilation | Controls

Air Conditioning

Product Information

PKA-M R32 Power Inverter Heat Pump Wall Mounted System (Three Phase)

Making a
World of
Difference




PKA-M - INDOOR UNITS		PKA-M100KA
CAPACITY (kW)	Heating (nominal) Cooling (nominal) Heating (UK) Cooling (UK)	11.2 (4.5-14.0) 9.5 (4.9-11.4) 9.5 (3.85-11.9) 9.2 (4.5-10.5)
SHF (nominal)		0.73
COP / EER (nominal)		3.61 / 3.95
SCOP / SEER (BS EN14825)		4.4 / 6.4
ERP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+ / A++
AIRFLOW (l/s)	Lo-Mi-Hi	333-383-433
PIPE SIZE MM (in)	Gas Liquid	15.88 (5/8") 9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)	Lo-Mi-Hi	41-45-49
SOUND POWER LEVEL (dBA)		65
DIMENSIONS (mm)	Width x Depth x Height	1170 x 295 x 365
WEIGHT (kg)		21
ELECTRICAL SUPPLY		Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6
INTERCONNECTING CABLE NO. CORES		4
WIRED REMOTE CONTROLLER REFERENCE		PAR-33MAA

PUZ-ZM - OUTDOOR UNITS		PUZ-ZM100YKA (Three Phase)
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	51 / 49
SOUND POWER LEVEL (dBA)	Cooling	69
WEIGHT (kg)		123
DIMENSIONS (mm)	Width x Depth x Height	1050 x 330 + 40 x 1338
ELECTRICAL SUPPLY		380-415v, 50Hz
PHASE		Three
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal) Heating/Cooling (UK)	3.102 / 2.405 2.47 / 2.06
STARTING CURRENT (A)		6.0
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	4.49 / 5.45 [8.6]
FUSE RATING (BS88) - HRC (A)		16
MAINS CABLE NO. CORES		5
MAX PIPE LENGTH (m)		100
MAX HEIGHT DIFFERENCE (m)		30
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t)	R32 (GWP 675) - 30m	4.00 / 2.70
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t)	R32 (GWP 675)	2.80 / 1.89


PRODUCT DIMENSIONS

PKA-M100KA


Upper View

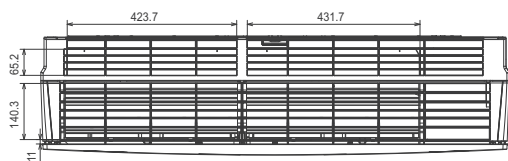

Front View

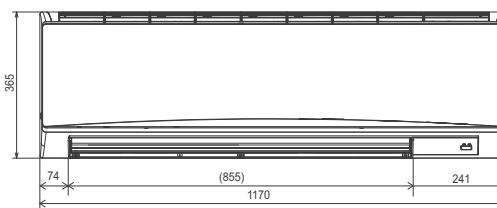

Side View



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com

web: airconditioning.mitsubishielectric.co.uk microsite: timeforR32.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland

Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2017. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). *These GWP values are based on Regulation(EU) No 517/2014 from IPCC 4th edition. In case of Regulation(EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP: 550), R407C (GWP:1650) or R134a (GWP:1300).



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment to the environment

Follow us @meuk_Jes
Follow us @green_gateway

Mitsubishi Electric
Living Environmental Systems UK

mitsubishielectric2

Effective as of May 2017

