



PLA-RP100BA

Heat Pump

R410A 4-Way Blow Ceiling Cassette System

- Optional 'I See Sensor' for energy saving and smooth temperature control throughout the room
- Airflow controllable for ceiling heights up to 4.2m, with automatic adjustment of fan speed
- Reduced draft air distribution, with independent vane control
- Filter lowering operation down to 4m (optional PLP-6BAJ grille required)



Pictures not to scale

Product Details	
Product Name	Advanced Analytics Dashboard
Version	2.1.0
Release Date	2023-10-27
Category	Business Intelligence
License	Commercial License
Support	24/7 Email & Chat Support
Documentation	Comprehensive User Guide & API Docs
Integration	Seamless integration with major CRM & ERP systems
Customization	Highly customizable themes & reports
Security	Enterprise-grade security & data encryption
Performance	Optimized for high-speed data processing
Scalability	Scalable architecture for growing businesses
Compliance	GDPR & SOC 2 compliant
Training	Free onboarding & training sessions
Updates	Regular updates & bug fixes
Feedback	User feedback loop for continuous improvement
Partners	Authorized resellers & partners available
Testimonials	See what our customers have to say
FAQ	Frequently Asked Questions
Contact Us	Get in touch with our sales team

PLA-RP100BA Indoor Unit





Capacity (kW):	
Heating (Nominal)	11.50
Cooling (Nominal)	10.00
Heating (UK)	9.80
Cooling (UK)	9.00
SHF R410A (Nominal)	0.74
Width (grille) - mm	840 (950)
Depth (grille) - mm	840 (950)
Height (grille) - mm	298 (35)
Weight (grille) - kg	25 (6)
Airflow (m3/min) - Lo-Mi1-Mi2-Hi	20-23-26-30
Noise (dBA) - Lo-Mi1-Mi2-Hi	32-34-37-40
Pipe Size Gas mm (in)	15.88 (5/8)
Pipe Size Liquid mm (in)	9.52 (3/8)
Electrical Supply	Fed by Outdoor Unit
Phase	Single
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4
Grille Ref	PLP-6BA GRILLE
Remote Controller Ref	PAR-21MAA

PUH-P100YHA Outdoor Unit



Width - mm	943
Depth - mm	330+30
Height - mm	950
Weight - kg	94
Noise (dBA) (Heating /Cooling)	52 /50
Electrical Supply	380-415v, 50Hz
Phase	3
Fuse Rating (BS88) - HRC (A)	20
SystemPower Input (kW) - Heating (Nominal)	3.4
SystemPower Input (kW) - Cooling (Nominal)	3.53
SystemPower Input (kW) - Heating (UK)	3.03
SystemPower Input (kW) - Cooling (UK)	3
Starting Current (A)	45
SystemRunning Current (A) - Heating / Cooling	6.1 / 6.31
Mains Cable No. Cores	5
Max Pipe Length (m)	50
Max Height Difference (m)	50
Charge (kg) - 30m	4.4

Dimensions

PLA-RP100BA

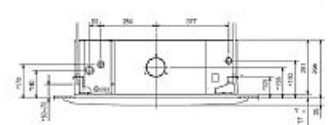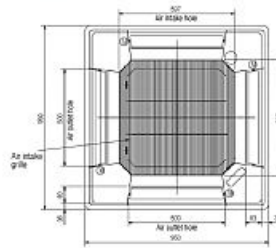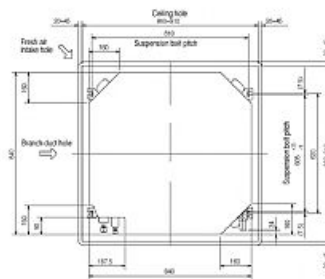

PUH-P100YHA

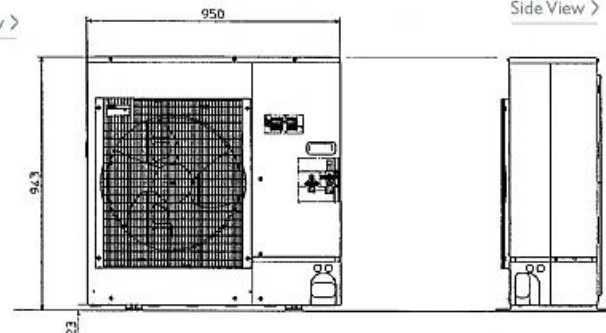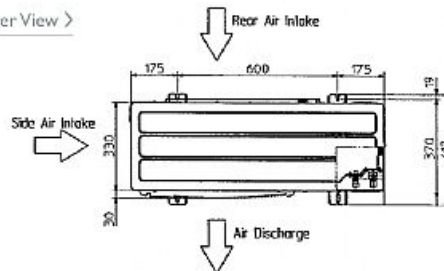

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



Tel:
Fax: