







PLA-RP50BA

Power Inverter Heat Pump

R410A 4-Way Blow Ceiling Cassette System

Advanced inverter technology makes the Mr Slim Power Inverter the number one choice for improving comfort. They provide energy savings of up to 70% annually when compared to a previous non-inverter model. Operating noise has also been reduced thanks to improvements in fan design, while existing pipe work is reusable for easier maintenance and installation.

- Airflow controllable for ceiling heights up to 4.2m, with automatic adjustment of fan speed
- Reduced draft air distribution, with independent vane control
- Filter lowering operation down to 4m (optional PLP-6BAJ grille required)
- Optional 'I See Sensor' for energy saving and smooth temperature control throughout the room







Pictures not to scale


Product Details

| PLA-RP50BA Indoor Unit | |
|----------------------------------|---------------------|
| Capacity (kW): | |
| Heating (Nominal) (Low - High) | 6.00 (2.50 - 7.30) |
| Cooling (Nominal) (Low - High) | 5.00 (2.30 - 5.60) |
| Heating (UK) (Low - High) | 5.10 (2.15 - 6.20) |
| Cooling (UK) (Low - High) | 4.60 (2.15 - 5.15) |
| SHF R410A (Nominal) | 0.81 |
| COP / EER (Nominal) | 3.61 / 3.23 |
| Energy Label Heating / Cooling | A/A |
| Width - mm | 840 (950) |
| Depth - mm | 840 (950) |
| Height - mm | 258 (35) |
| Weight - kg | 22 (6) |
| Airflow (m3/min) - Lo-Mi1-Mi2-Hi | 12-14-16-18 |
| Noise (dBA) - Lo-Mi1-Mi2-Hi | 28-29-31-32 |
| Electrical Supply | Fed by Outdoor unit |
| Phase | Single |
| Fuse Rating (BS88) - HRC (A) | 6 |
| Interconnecting Cable No. Cores | 4 |


| PUHZ-RP50VHA4 Outdoor Unit | |
|---|----------------|
| Width - mm | 800 |
| Depth - mm | 300 + 23 |
| Height - mm | 600 |
| Weight - kg | 42 |
| Noise (dBA) (Heating /Cooling) - Lo-Hi | 41-46 /41-44 |
| Electrical Supply | 220-240v, 50Hz |
| Phase | Single |
| Fuse Rating (BS88) - HRC (A) | 16 |
| SystemPower Input (kW) - Heating (Nominal) | 1.66 |
| SystemPower Input (kW) - Cooling (Nominal) | 1.55 |
| SystemPower Input (kW) - Heating (UK) | 1.48 |
| SystemPower Input (kW) - Cooling (UK) | 1.32 |
| SystemRunning Current (A) - Heating / Cooling | 7.62 / 7.08 |
| Mains Cable No. Cores | 3 |
| Max Pipe Length (m) | 50 |
| Charge (kg) - 30m | 2.5 |

Dimensions

PLA-RP50BA

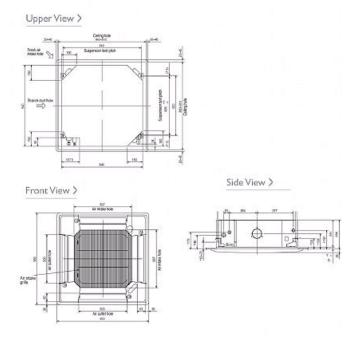

PUHZ-RP50VHA4

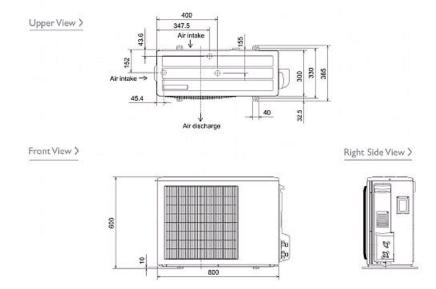



Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel: Fax:



