

Air Conditioning


Product Information

PLA-RP125BA : Standard Inverter Heat Pump
R410A 4-Way Blow Ceiling Cassette System



Our standard inverter range offers customers all the features and benefits of inverter technology whilst being cost effective.

FEATURES

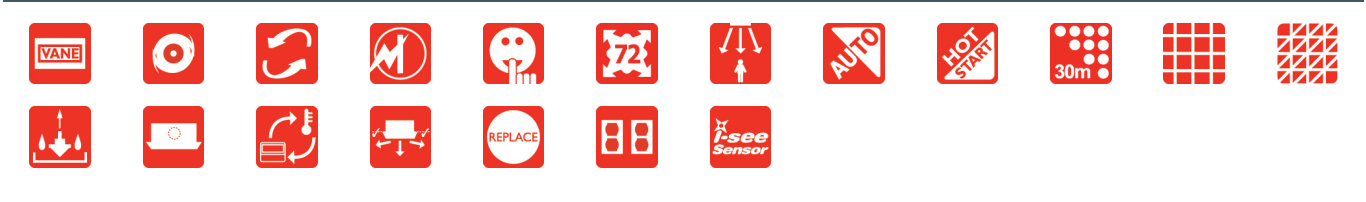

INDOOR

Heating Capacity (kW) (nominal)	14.0 (5 - 16)
Cooling Capacity (kW) (nominal)	12.3 (5.5 - 14)
Heating Capacity (kW) (UK)	11.9 (4.25 - 13.6)
Cooling Capacity (kW) (UK)	11.3 (5.05 - 12.9)
SHF (nominal and UK)	0.71
COP / EER (nominal)	3.41 / 3.01
SCOP / SEER	3.7 / 3.6
Energy Efficiency Class - Heating / Cooling	N/A / N/A
Pipe Size Gas (mm [in])	15.88 (5/8")
Pipe Size Liquid (mm [in])	9.52 (3/8")
Airflow (m³/min) Lo-Mi-Mi2-Hi	22 - 25 - 28 - 31
Sound Pressure Level (dBA) Lo-Mi-Mi2-Hi	34 - 36 - 39-41
Sound Power Level (dBA) Cooling	63

Weight (kg) Unit / grille	25 / 6
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4


OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	55 / 51
Sound Power Level (dBA) Cooling	71
Weight (kg)	101
Dimensions (mm) Width x Depth x Height	950 x (330+30) x 1350
Electrical Supply	380-415V,50HZ
Phase	THREE
System Power Input (kW) - Heating / Cooling (nominal)	4.11 / 4.09
System Power Input (kW) - Heating / Cooling (UK)	3.66 / 3.48
Starting Current (A)	5
System Running Current (A) [MAX] - Heating / Cooling	7.03 / 7.18 [14.0]
Fuse Rating (BS88) - HRC (A)	16
Mains Cable No. Cores	5
Max Pipe Length (m)	50
Max Height Difference (m)	30
Charge R410A (kg) - Pre charged length (m)	3 - 30


DIMENSIONS

PLA-RP125BA


Upper View >



Front View >




Side View >



DIMENSIONS

PUHZ-P125YHA

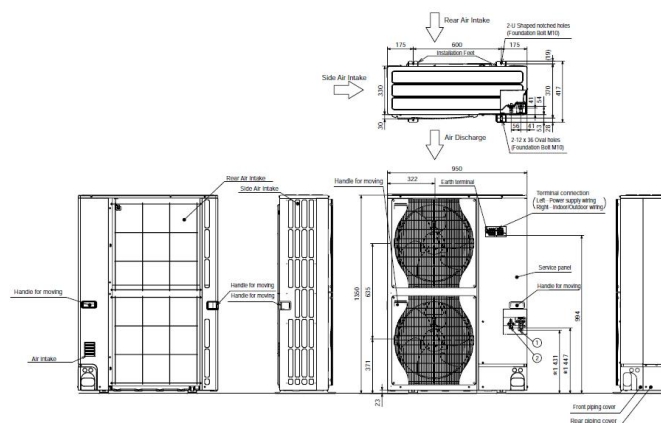

Telephone: 01707 282880 Fax: 01707 278881

Email: airconditioning@meuk.mee.com Website: <http://www.airconditioning.mitsubishielectric.co.uk>

Country of origin: United Kingdom – Japan – Thailand – Malaysia. © Mitsubishi Electric Europe 2013. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any technical, technical description to the equipment described to be withdrawn or replace product without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.