

Air Conditioning

Product Information

PLA-ZRP125BA (Three Phase)
Zubadan Inverter Heat Pump
4-Way Blow Ceiling Cassette System

Making a
World of
Difference

Mr.SLIM™



The Mr Slim Zubadan Inverter heat pumps achieve an excellent heating performance even when the outdoor air temperature is as low as -25°C.

Key Features

- **Stable heating performance** - Full heating capacity at -15°C, a 30% capacity improvement over the next size up Power Inverter
- **Expanded heating operation** - Will work effectively even when the outdoor ambient air temperature is -25°C
- **Stable operation** - Utilising a Flash Injection Circuit, the Zubadan models have reduced defrost times and can provide continuous heating for up to 150 mins
- **Quick start-up** - At -20°C, max heating capacity is achieved in about 20 mins, improving comfort levels

ZUBADAN



Air Conditioning | Heating
Ventilation | Controls

Air Conditioning

Product Information




PLA-ZRP125BA (Three Phase) Zubadan Inverter Heat Pump 4-Way Blow Ceiling Cassette System

Making a
World of
Difference

PLA-RP - INDOOR UNITS		PLA-ZRP125BA
CAPACITY (kW)	Heating (nominal)	14.0 (5.0-16.0)
	Cooling (nominal)	12.5 (5.5-14.0)
	Heating (UK)	11.9 (4.25-13.6)
	Cooling (UK)	11.5 (5.05-12.9)
SHF (nominal & UK)		0.74
COP / EER (nominal)		3.61 / 2.81
SCOP / SEER (BS EN14825)		3.5 / 5.1
EP ENERGY EFFICIENCY CLASS Heating/Cooling		A / A
AIRFLOW (l/s)		Lo-Mi-Mi2-Hi 367-417-467-517
PIPE SIZE mm (in)		Gas/Liquid 15.88 (5/8") / 9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)		Lo-Mi-Mi2-Hi 34-36-39-41
SOUND POWER LEVEL (dBA)		66
DIMENSIONS (mm)		Width x Depth x Height (Grille) 840 (950) x 840 (950) x 298 (35)
WEIGHT (kg)		Unit / Panel 27 / 6
ELECTRICAL SUPPLY		Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6
INTERCONNECTING CABLE No. Cores		4
GRILLE REFERENCE		PLP-6BA
WIRED REMOTE CONTROLLER REFERENCE		PAR-31MAA

PUHZ-SHW - OUTDOOR UNITS		PUHZ-SHW140YHA
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	52 / 51
SOUND POWER LEVEL (dBA)	Cooling	69
WEIGHT (kg)		134
DIMENSIONS (mm)	Width x Depth x Height	950 x 330 + 30 x 1350
ELECTRICAL SUPPLY		380-415, 50Hz
PHASE		Three
SYSTEM POWER	Heating/Cooling (nominal)	3.88 / 4.45
INPUT (kW)	Heating/Cooling (UK)	3.45 / 3.78
STARTING CURRENT (A)		3
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	5.62 / 5.72 [14.1]
FUSE RATING (BS88) - HRC (A)		16
MAINS CABLE No. Cores		5
MAX PIPE LENGTH (m)		75
MAX HEIGHT DIFFERENCE (m)		30
CHARGE R410A (kg) - 30m		5.5

DIMENSIONS

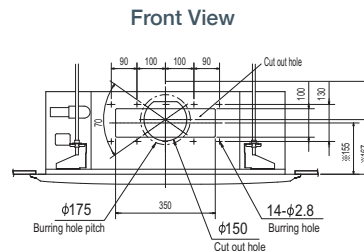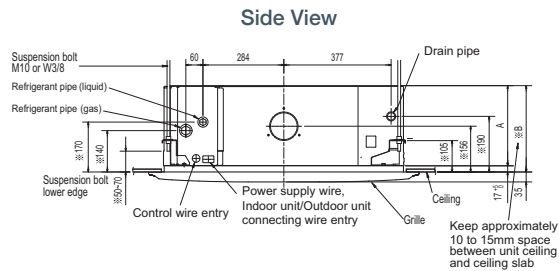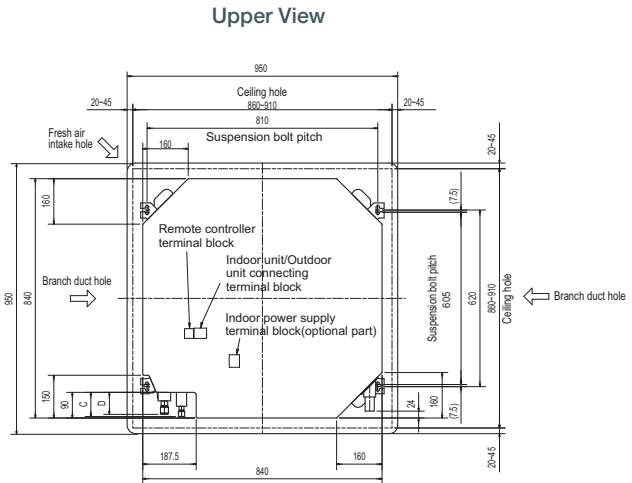

Model	A	B	C	D	E
PLA-ZRP125BA	281	298	85	77	440



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2015. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.



Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning and heat pump systems contain fluorinated greenhouse gases R410A, R407C and R134a.



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric UK's commitment to the environment



Follow us @meuk_Jes
Follow us @green_gateway



Mitsubishi Electric
Living Environmental Systems UK



mitsubishielectric2

Effective as of April 2015