

Air Conditioning

Product Information

PSA-RP140KA : Power Inverter Heat Pump

R410A Floor Mounted System

Mr.SLIM™



The PSA Floor Standing System compliments the Mitsubishi Electric range of indoor units. The sleek, modern design of this unit is ideal for numerous applications including bars and restaurants.

FEATURES



INDOOR


Heating Capacity (kW) (nominal)	16.0 (5.7 - 18)
Cooling Capacity (kW) (nominal)	13.4 (6.2 - 15)
Heating Capacity (kW) (UK)	13.6 (4.84 - 15.3)
Cooling Capacity (kW) (UK)	12.3 (5.7 - 13.8)
SHF (nominal and UK)	0.71
COP / EER (nominal)	3.34 / 3.30
SCOP / SEER	4.4 / 5.3
Energy Efficiency Class - Heating / Cooling	N/A / N/A
Pipe Size Gas (mm [in])	15.88 (5/8")
Pipe Size Liquid (mm [in])	9.52 (3/8")
Airflow (m ³ /min) Lo-Hi	25 - 28 - 31
Sound Pressure Level (dBA) Lo-Mi-Hi	45 - 49 - 51
Sound Power Level (dBA) Cooling	66
Dimensions (mm) Width x Depth x Height	600 x 360 x 1900
Weight (kg)	48
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	52 / 50
Sound Power Level (dBA) Cooling	70
Weight (kg)	132
Dimensions (mm) Width x Depth x Height	1050 x (330+30) x 1338
Electrical Supply	380-415V, 50HZ
Phase	THREE
System Power Input (kW) - Heating / Cooling (nominal)	4.79 / 4.06
System Power Input (kW) - Heating / Cooling (UK)	4.26 / 3.45
Starting Current (A)	4
System Running Current (A) [MAX] - Heating / Cooling	7.87 / 7.34 [11.7]
Fuse Rating (BS88) - HRC (A)	16
Mains Cable No. Cores	5
Max Pipe Length (m)	75
Max Height Difference (m)	30
Charge R410A (kg) - pre charged length (m)	5 - 30

DIMENSIONS

PSA-RP140KA

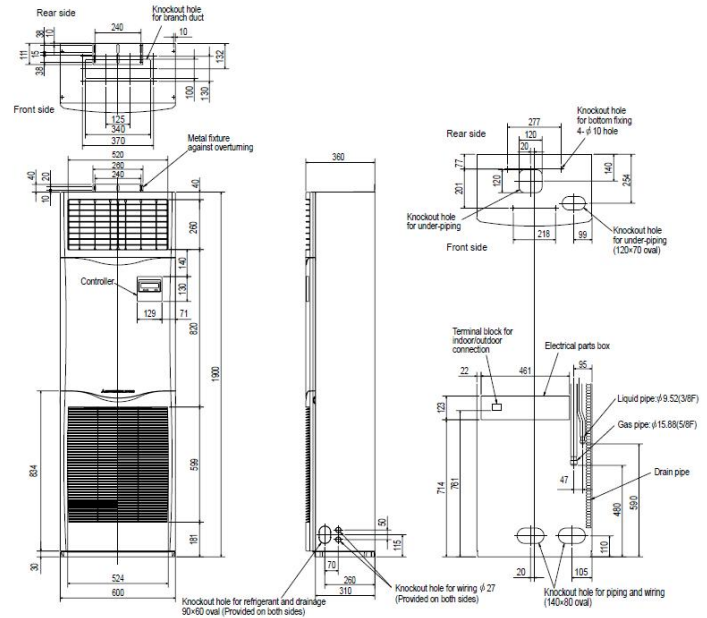

DIMENSIONS

PUHZ-ZRP140YKA

