Air Conditioning

Product Information

PSA-RP140KA (Three Phase) **Power Inverter Heat Pump** Floor Standing System

Making a World of Difference

mr.slm.



Our wide range of Power Inverters offer customers high seasonal efficiency, advanced control options and quiet operation, whilst providing greater flexibility and ease of installation.

Key Features

- Built in controller
- Space saving
- Quick and easy installation
- Compact body/minimal space





Air Conditioning | Heating Ventilation | Controls



Product Information

PSA-RP140KA (Three Phase) **Power Inverter Heat Pump** Floor Standing System

Making a World of Difference

PSA-RP - INDOOR UNITS		PSA-RP140KA
CAPACITY (kW)	Heating (nominal)	16.0 (5.7-18.0)
	Cooling (nominal)	13.4 (6.2-15.0)
	Heating (UK)	13.6 (4.84-15.3)
	Cooling (UK)	12.3 (5.7-13.8)
SHF (nominal & UK)		0.71
COP / EER (nominal)		3.34 / 3.30
SCOP / SEER (BS EN14825)		4.4 / 5.3
ErP ENERGY EFFICIENCY CLASS Heating/Cooling		N/A
AIRFLOW (I/s)	Lo-Mi-Hi	417-467-517
PIPE SIZE mm (in)	Gas/Liquid	15.88 (5/8") / 9.52 (3/8")
SOUND PRESSURE LEVEL (dBA)	Lo-Mi-Hi	45-49-51
SOUND POWER LEVEL (dBA)		66
DIMENSIONS (mm)	Width x Depth x Height (Grille)	600 x 360 x 1900
WEIGHT (kg)	Unit / Panel	48
ELECTRICAL SUPPLY		Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6
INTERCONNECTING CABLE No. Cores		4

PUHZ-ZRP - OUTDOOR UNITS

SOUND PRESSURE LEVEL (dBA) Heating/Cooling

SYSTEM RUNNING CURRENT (A) Heating/Cooling [MAX]

Width x Depth x Height

Heating/Cooling (nominal)

Heating/Cooling (UK)

SOUND POWER LEVEL (dBA) Cooling

WEIGHT (kg)

PHASE

DIMENSIONS (mm)

ELECTRICAL SUPPLY

SYSTEM POWER INPUT (kW)

STARTING CURRENT (A)

MAINS CABLE No. Cores

MAX PIPE LENGTH (m)

FUSE RATING (BS88) - HRC (A)

MAX HEIGHT DIFFERENCE (m)

CHARGE R410A (kg) - 30m

PUHZ-ZRP140YKA2

52 / 50

131

1050 x 330 + 40 x 1338

380-415y 50Hz

Three

4.79 / 4.06

4.26 / 3.45

4.0

7.87 / 7.34 [13.7]

16

3

75


30

5.0

Air Conditioning


DIMENSIONS

Upper View



Front View

Side View

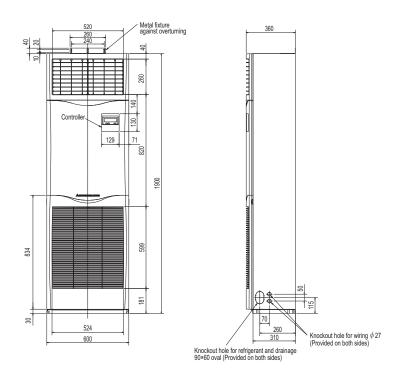

Note: When used with a Mr Slim Multi-Split system PSA-RP cannot be connected with indoor units of different types



Telephone: 01707 282880

email: air.conditioning@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division

Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881 IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thaland – Malaysia. (Mitsubishi Electric Europe 2015. Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior molfication or public amouncement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sea, a coxy of which is available on request. Third-party roduct and brand nemes may be trademarks or registred trademarks of their respective owners.



www.greengateway.mitsubishielectric.co.uk Mitsubishi Electric UK's commitment to the environment



mitsubishielectric2

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electriciar/electrical engineer to select the correct cable size and fuse rating based on current regulation and sile specific conditions. Misubish Electrics air conditioning and heat pump systems contain fluorinated greenhouse gases R410A, R407C and R134a.

Effective as of April 2015