

# Air Conditioning

## Product Information

### SEZ-KD35VAQ : Inverter Heat Pump

R410A Ceiling Concealed Ducted System



Designed for homes, offices, restaurants or shops, the SEZ series operates at low noise levels and is virtually invisible when installed within a suspended ceiling. Its low unit height and lightweight design also helps to make installation easier and more convenient.

## FEATURES



### INDOOR


Heating Capacity (kW) (nominal)	4.2 (1.7 - 5)
Cooling Capacity (kW) (nominal)	3.5 (1.4 - 3.9)
Heating Capacity (kW) (UK)	3.6 (1.45 - 4.25)
Cooling Capacity (kW) (UK)	3.22 (1.29 - 3.59)
SHF (nominal and UK)	0.78
COP / EER (nominal)	3.72 / 3.47
SCOP / SEER	4 / 5.6
Energy Efficiency Class - Heating / Cooling	A+ / A+
Airflow (m <sup>3</sup> /min) Lo-Mi-Hi	7 - 9 - 11
Pipe Size Gas (mm [in])	9.52 (3/8")
Pipe Size Liquid (mm [in])	6.35 (1/4")
External Static Pressure (Pa)	5-15-35-50
Sound Pressure Level (dBA) Lo-Mi-Hi	23 - 28 - 33
Sound Power Level (dBA) Cooling	53
Dimensions (mm) Width x Depth x Height	990 x 700 x 200
Weight (kg)	21
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

### OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	50 / 49
Sound Power Level (dBA) Cooling	62
Weight (kg)	35
Dimensions (mm) Width x Depth x Height	800 x 285 x 550
Electrical Supply	220-240V, 50HZ
Phase	SINGLE
System Power Input (kW) - Heating / Cooling (nominal)	1.13 / 1.01
System Power Input (kW) - Heating / Cooling (UK)	1.01 / 0.86
Starting Current (A)	5.2
System Running Current (A) [MAX] - Heating / Cooling	4.80 / 5.20 [8.7]
Fuse Rating (BS88) - HRC (A)	10
Mains Cable No. Cores	3
Max Pipe Length (m)	20
Max Height Difference (m)	12
Charge R410A (kg) - Pre charged length (m)	1.15 - 7

### DIMENSIONS

SEZ-KD35VAQ

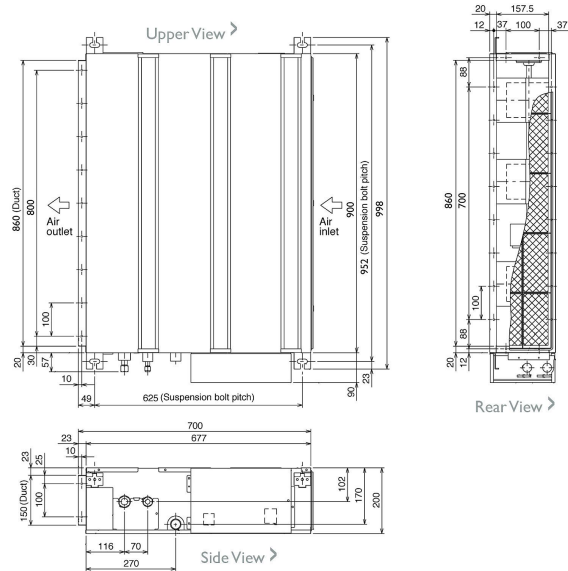

### DIMENSIONS

SUZ-KA35VA4

