



PMFY-P32VBM-E

Indoor Unit

1-Way Blow Ceiling Cassette



Utilising a compact and lightweight body, the unit is perfect for applications where ceiling space is limited. A total body weight of 14kg makes it one of the lightest available, latest fan technology also makes it one of the quietest.

- **Compact size for handy installation and easy maintenance**
- **Newly developed airflow control technology reduces noise levels**
- **Drain lift pump mechanism allows the drain to be positioned anywhere up to 600mm from the ceiling's surface**
- **Only 230mm high**
- **Fresh air duct facility**




Pictures not to scale

Product Details

| PMFY-P32VBM-E | |
|----------------------------------------------|----------------|
| Capacity (kW): | |
| Heating (Nominal) | 4.0 |
| Cooling (Nominal) | 3.6 |
| R410A Heating (UK) | 3.7 |
| R407c Heating (UK) | 3.7 |
| R410A Cooling (UK) | 3.4 |
| R407c Cooling (UK) | 3.4 |
| R410A High Sensible Cooling (UK) | 2.6 |
| SHF R410A (UK) | 0.71 |
| SHF R407c (UK) | 0.76 |
| SHF High Sensible R410A (UK) | 0.77 |
| Power Input (kW) Heating (Nominal) | 0.044 |
| Power Input (kW) Cooling (Nominal) | 0.044 |
| Airflow(m ³ /min) - Lo-Mi1-Mi2-Hi | 7.3-8-8.6-9.3 |
| Noise (dBA) - Lo-Mi1-Mi2-Hi | 32-34-36-37 |
| Width (grille) - mm | 812 (1000) |
| Depth (grille) - mm | 395 (470) |
| Height (grille) - mm | 230 (30) |
| Weight (grille) - kg | 14 (3) |
| Electrical Supply | 220-240v, 50Hz |
| Phase | Single |
| Mains Cable No. Cores | 3 |
| Running Current (A) - Heating | 0.21 |
| Running Current (A) - Cooling | 0.21 |
| Fuse Rating (BS88) - HRC (A) | 6 |
| Grille Ref | PMP-40BM |

Dimensions

PMFY-P32VBM-E

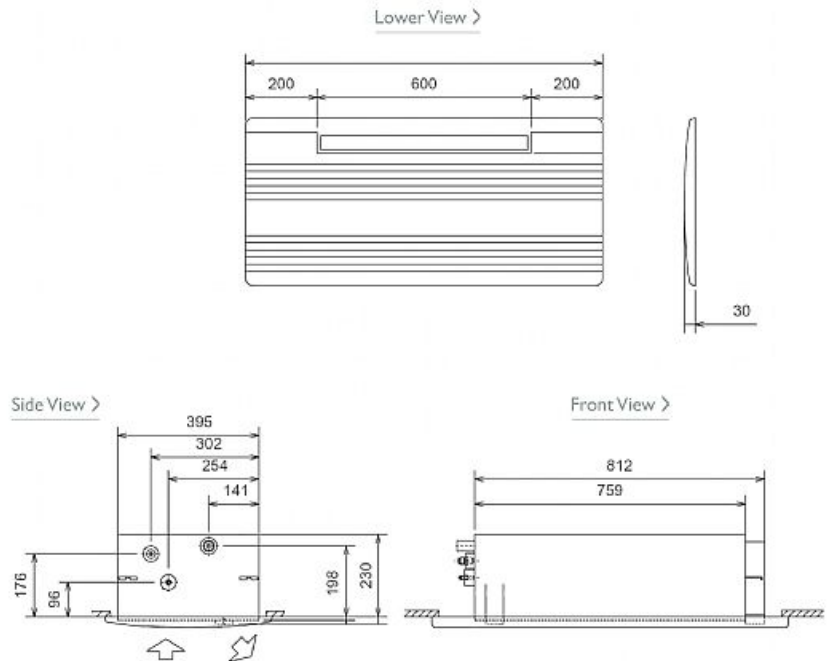

Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:
Fax:

