



GUF-50RD3

Lossnay Outdoor Air Processing Unit



- A combination of Lossnay and City Multi indoor in a single unit
- Air temperature in any room can be adjusted to the desired temperature via this unit which is used as an indoor unit of the City Multi air conditioning system
- The ventilating and air conditioning functions are integrated in a single unit, saving space and installation costs
- Heat recovery helps to save energy, a benefit that's not only good for the environment, but also great for cutting energy costs
- Free cooling is also available should outdoor conditions be suitable






Pictures not to scale

Product Details

GUF-50RD3	
Capacity (kW):	
Heating (Nominal)	6.42 (2.25)
Cooling (Nominal)	5.29 (1.66)
R410A Heating (UK)	5.93 (2.08)
R407c Heating (UK)	5.93 (2.08)
R410A Cooling (UK)	5.03 (1.58)
R407c Cooling (UK)	5.03 (1.58)
Power Input (kW) Heating (Nominal)	0.265
Power Input (kW) Cooling (Nominal)	0.265
Airflow (m3/hour) - Lo-Hi	400-500
Noise (dBA) - Lo-Hi	29.5-34.5
Width - mm	1016
Depth - mm	1288
Height - mm	317
Weight - kg	54
Electrical Supply	220-240v, 50Hz
Phase	Single
Mains Cable No. Cores	3
Running Current (A) - Lo-Hi	0.7-1.15
Fuse Rating (BS88) - HRC (A)	6

Dimension

GUF-50RD3

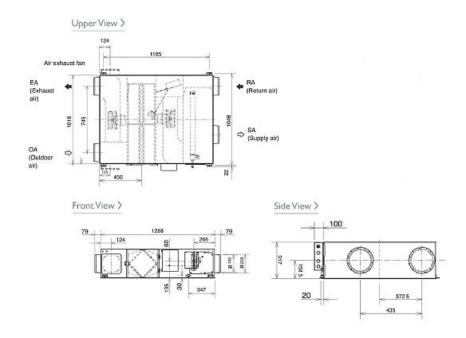



Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.





