

# PQHY-P700YSHM-A

WY Series 28hp Water Cooled Condensing Unit R410A Heat Pump





Pictures not to scale

### **Product Details**


PQHY-P700YSHM-A	
Capacity (kW):	
Heating (Nominal)	88.0
Cooling (Nominal)	80.0
Power Input (kW) Heating (Nominal)	16.51
Power Input (kW) Cooling (Nominal)	15.58
Max No. of Connectable Indoor Units	50
Noise (dBA)	53.5
Width - mm	880 + 880 + 880
Depth - mm	550
Height - mm	1160
Weight - kg	195 + 195 + 195
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	25.5
Running Current (A) - Cooling	24
Fuse Rating (BS88) - HRC (A)	20

Piping Restrictions	
Total Piping Length (m)	500
Furthest Piping Length (m)	165
Furthest Piping Length after 1st Branch (m)	40
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

#### Dimension

## PQHY-P700YSHM-A



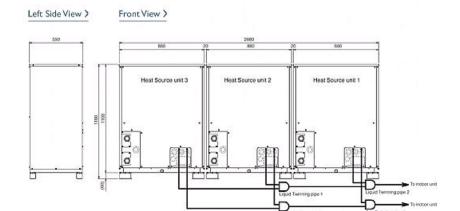



# Telephone: 01707 282880

Email: air.conditioning@meuk.mee.com Website: http://www.mitsubishielectric.co.uk/aircon

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.



Tel:

Fax:



