




# PQHY-P800YSHM-A

WY Series 32hp Water Cooled Condensing Unit

R410A Heat Pump



Pictures not to scale

## Product Details

PQHY-P800YSHM-A	
Capacity (kW):	
Heating (Nominal)	100.0
Cooling (Nominal)	90.0
Power Input (kW) Heating (Nominal)	20.74
Power Input (kW) Cooling (Nominal)	19.18
Max No. of Connectable Indoor Units	50
Noise (dBA)	54
Width - mm	880 + 880 + 880
Depth - mm	550
Height - mm	1160
Weight - kg	195 + 195 + 195
Electrical Supply	380-415v, 50Hz
Phase	3
Mains Cable No. Cores	4 + earth
Starting Current (A)	8
Running Current (A) - Heating	32
Running Current (A) - Cooling	29.6
Fuse Rating (BS88) - HRC (A)	20

### Piping Restrictions

Total Piping Length (m)	500
Furthest Piping Length (m)	165
Furthest Piping Length after 1st Branch (m)	40
Between Indoor and Outdoor Units - Height (m)	50
Between Indoor and Indoor Units - Height (m)	15

## Dimensions


PQHY-P800YSHM-A

[Upper View >](#)



[Left Side View >](#)

[Front View >](#)

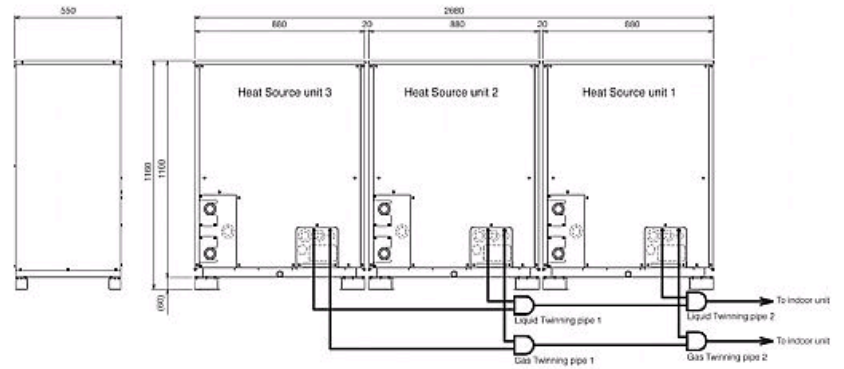

Telephone: 01707 282880

Email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com) Website: <http://www.mitsubishielectric.co.uk/aircon>

Mitsubishi Electric reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement.

Tel:  
Fax:

