



AIR CONDITIONERS CITY MULTI

Models **PQRY-P200YMF-B, P250YMF-B**
CMB-P104, P105, P106, P108, P1010, P1013, P1016V-E

Service Handbook

CITY MULTI

1 PRECAUTIONS FOR DEVICES THAT USE R407C REFRIGERANT



Caution

Do not use the existing refrigerant piping.

- The old refrigerant and refrigerator oil in the existing piping contains a large amount of chlorine which may cause the refrigerator oil of the new unit to deteriorate.

Use refrigerant piping made of **C1220T phosphorus deoxidized copper as specified in the *JIS H3300 "Copper and copper alloy seamless pipes and tubes". In addition, be sure that the inner and outer surfaces of the pipes are clean and free of hazardous sulphur, oxides, dust/dirt, shaving particles, oils, moisture, or any other contaminant.

- Contaminants on the inside of the refrigerant piping may cause the refrigerant residual oil to deteriorate.

*JIS: Japanese Industrial Standard

** : Comparable to CU-DHP (CUPROCLIMA), Cu-bI (AFNOR), C12200 (ASTN), SF-Cu (DIN)

Store the piping to be used during installation indoors and keep both ends of the piping sealed until just before brazing. (Store elbows and other joints in a plastic bag.)

- If dust, dirt, or water enters the refrigerant cycle, deterioration of the oil and compressor trouble may result.

Use ester oil, ether oil or alkylbenzene (small amount) as the refrigerator oil to coat flares and flange connections.

- The refrigerator oil will degrade if it is mixed with a large amount of mineral oil.

Use liquid refrigerant to seal the system.

- If gas refrigerant is used to seal the system, the composition of the refrigerant in the cylinder will change and performance may drop.

Do not use a refrigerant other than R407C.

- If another refrigerant (R22, etc.) is used, the chlorine in the refrigerant may cause the refrigerator oil to deteriorate.

Use a vacuum pump with a reverse flow check valve.

- The vacuum pump oil may flow back into the refrigerant cycle and cause the refrigerator oil to deteriorate.

Do not use the following tools that have been used with conventional refrigerants.

(Gauge manifold, charge hose, gas leak detector, reverse flow check valve, refrigerant charge base, vacuum gauge, refrigerant recovery equipment.)

- If the conventional refrigerant and refrigerator oil are mixed in the R407C, the refrigerant may deteriorate.
- If water is mixed in the R407C, the refrigerator oil may deteriorate.
- Since R407C does not contain any chlorine, gas leak detectors for conventional refrigerants will not react to it.

Do not use a charging cylinder.

- Using a charging cylinder may cause the refrigerant to deteriorate.

Be especially careful when managing the tools.



- If dust, dirt, or water gets in the refrigerant cycle, the refrigerant may deteriorate.

If the refrigerant leaks, recover the refrigerant in the refrigerant cycle, then recharge the cycle with the specified amount of the liquid refrigerant indicated on the air conditioner.

- Since R407C is a nonazeotropic refrigerant, if additionally charged when the refrigerant leaked, the composition of the refrigerant in the refrigerant cycle will change and result in a drop in performance or abnormal stopping.



[1] Storage of Piping Material

(1) Storage location

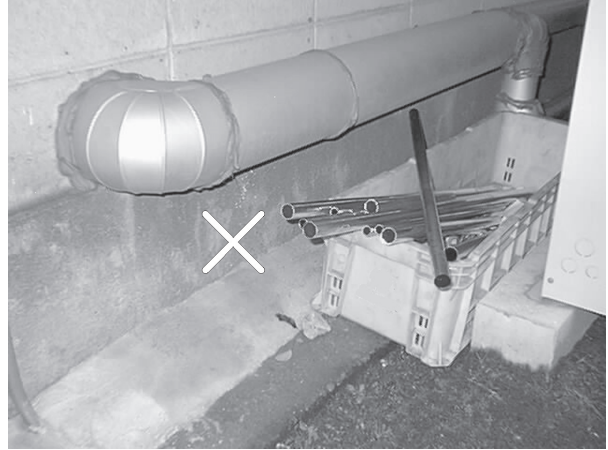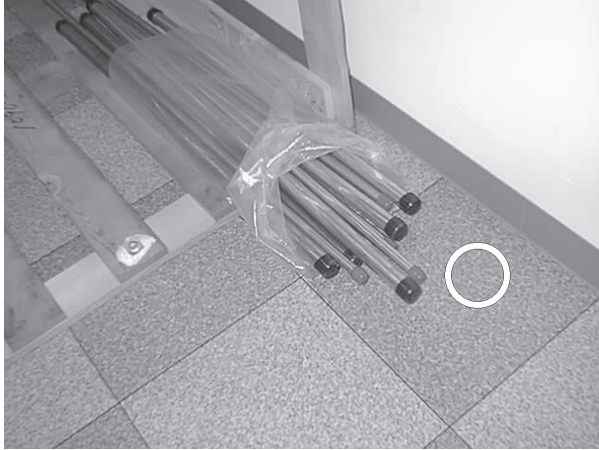

Store the pipes to be used indoors. (Warehouse at site or owner's warehouse)
Storing them outdoors may cause dirt, waste, or water to infiltrate.

(2) Pipe sealing before storage

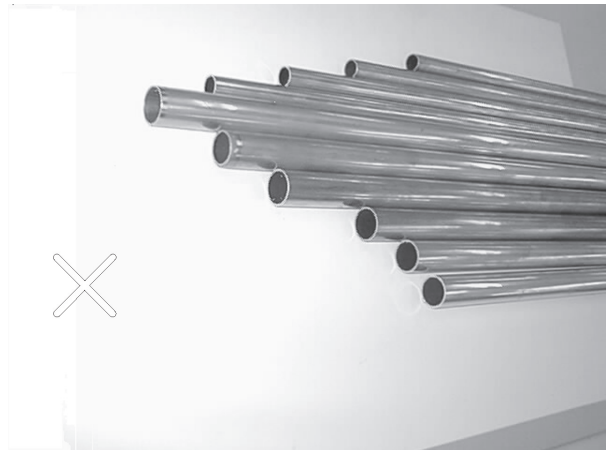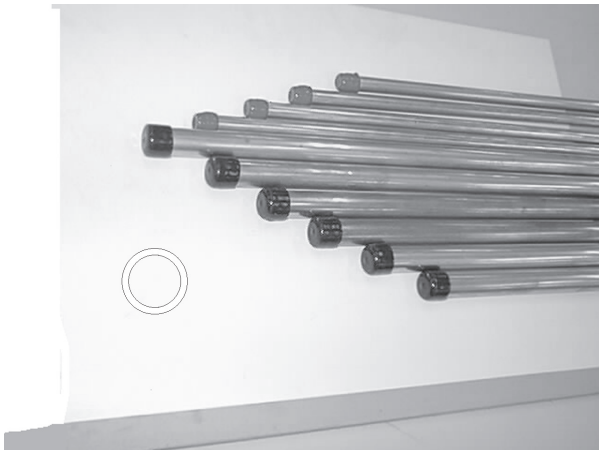


Both ends of the pipes should be sealed until immediately before brazing.
Wrap elbows and T's in plastic bags for storage.

* The new refrigerator oil is 10 times more hygroscopic than the conventional refrigerator oil (such as Suniso). Water infiltration in the refrigerant circuit may deteriorate the oil or cause a compressor failure. Piping materials must be stored with more care than with the conventional refrigerant pipes.

[2] Piping Machining

Use ester oil, ether oil or alkylbenzene (small amount) as the refrigerator oil to coat flares and flange connections.

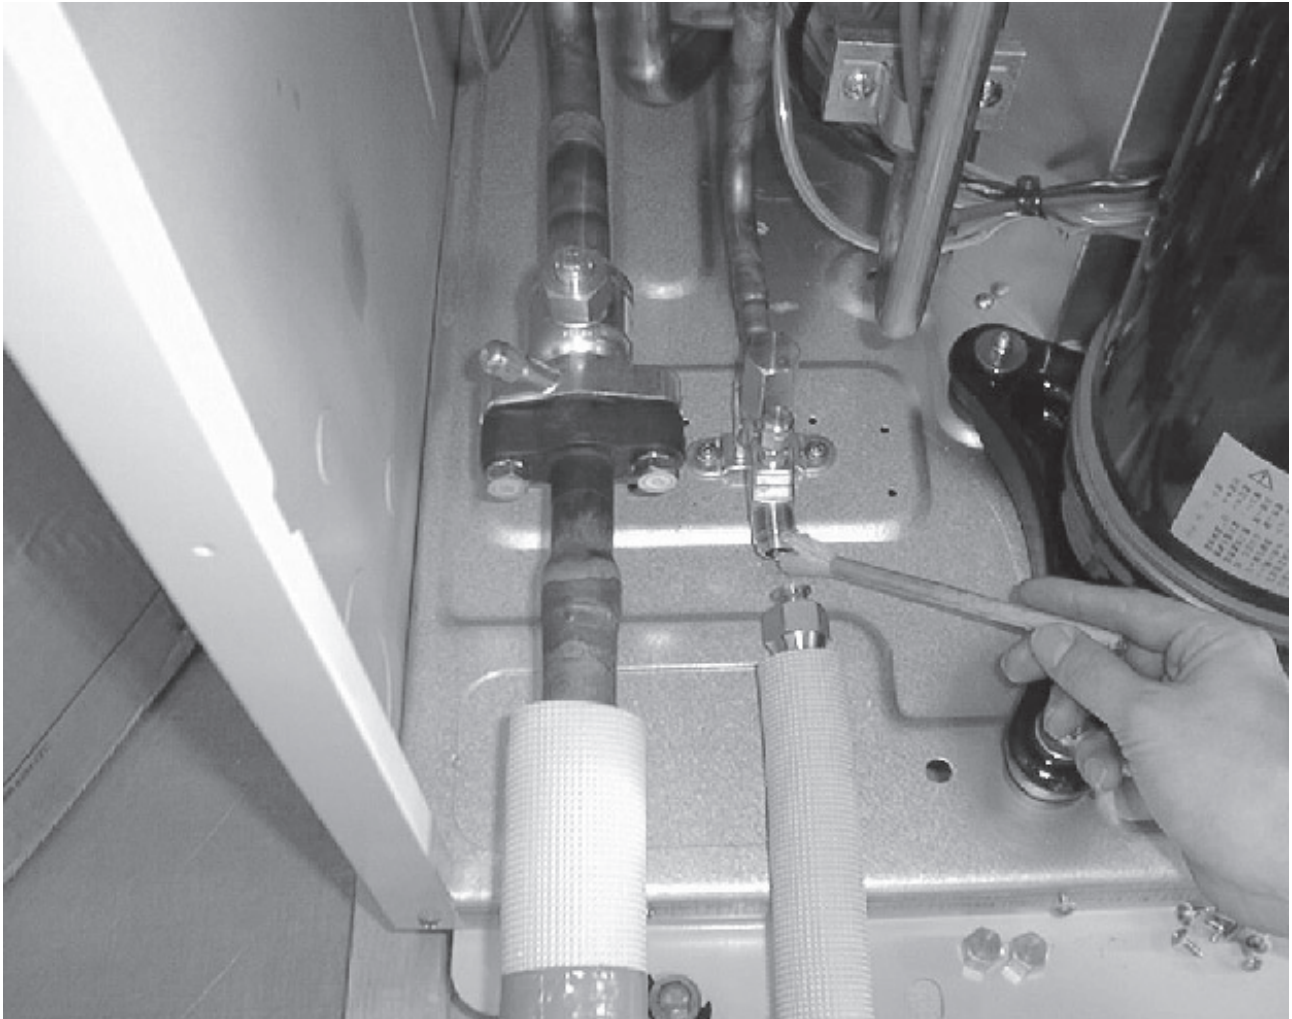

Use only the necessary minimum quantity of oil !

Reason :

1. The refrigerator oil used for the equipment is highly hygroscopic and may introduce water inside.

Notes :

- Introducing a great quantity of mineral oil into the refrigerant circuit may also cause a compressor failure.
- Do not use oils other than ester oil, ether oil or alkylbenzene.

[3] Necessary Apparatus and Materials and Notes on Their Handling

The following tools should be marked as dedicated tools for R407C.

<<Comparison of apparatus and materials used for R407C and for R22>>

Apparatus Used	Use	R22	R407C
Gauge manifold	Evacuating, refrigerant filling	Current product	⊙
Charging hose	Operation check	Current product	⊙
Charging cylinder	Refrigerant charging	Current product	⊙ Do not use.
Gas leakage detector	Gas leakage check	Current product	⊙ Shared with R134a
Refrigerant collector	Refrigerant collection	R22	⊙ For R407C use only
Refrigerant cylinder	Refrigerant filling	R22	⊙ Identification of dedicated use for R407C : Record refrigerant name and put brown belt on upper part of cylinder.
Vacuum pump	Vacuum drying	Current product	△ Can be used by attaching an adapter with a check valve.
Vacuum pump with a check valve		Current product	△
Flare tool	Flaring of pipes	Current product	△
Bender	Bending of pipes	Current product	△
Application oil	Applied to flared parts	Current product	⊙ Ester oil or Ether oil or Alkybenzene (Small amount)
Torque wrench	Tightening of flare nuts	Current product	△
Pipe cutter	Cutting of pipes	Current product	△
Welder and nitrogen cylinder	Welding of pipes	Current product	△
Refrigerant charging meter	Refrigerant charging	Current product	△
Vacuum gauge	Checking the vacuum degree	Current product	△

Symbols : ⊙ To be used for R407C only.

△ Can also be used for conventional refrigerants.


Tools for R407C must be handled with more care than those for conventional refrigerants. They must not come into contact with any water or dirt.

[4] Brazing


No changes from the conventional method, but special care is required so that foreign matter (ie. oxide scale, water, dirt, etc.) does not enter the refrigerant circuit.

Example : Inner state of brazed section

When non-oxide brazing was not used

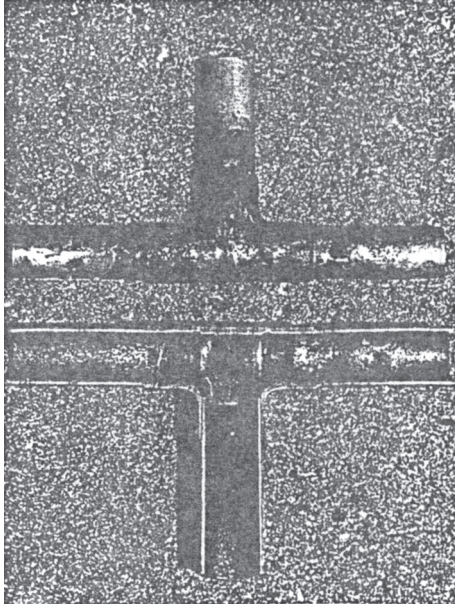

When non-oxide brazing was used

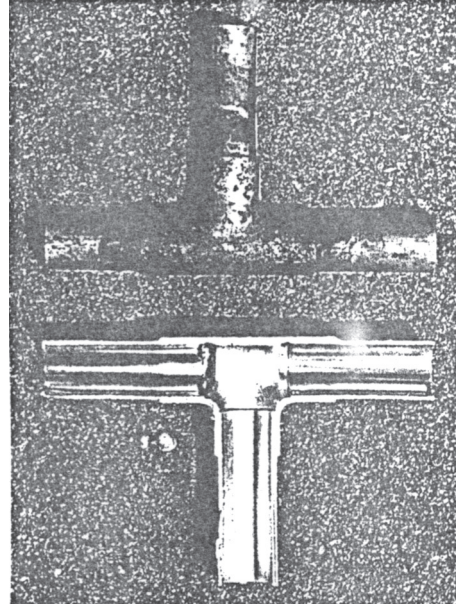

Items to be strictly observed :

1. Do not conduct refrigerant piping work outdoors on a rainy day.
2. Apply non-oxide brazing.
3. Use a brazing material (Bcup-3) which requires no flux when brazing between copper pipes or between a copper pipe and copper coupling.
4. If installed refrigerant pipes are not immediately connected to the equipment, then braze and seal both ends of them.

Reasons :


1. The new refrigerant oil is 10 times more hygroscopic than the conventional oil. The probability of a machine failure if water infiltrates is higher than with conventional refrigerant oil.
2. A flux generally contains chlorine. A residual flux in the refrigerant circuit may generate sludge.

Note :


- Commercially available antioxidants may have adverse effects on the equipment due to its residue, etc. When applying non-oxide brazing, use nitrogen.

[5] Airtightness Test

No changes from the conventional method. Note that a refrigerant leakage detector for R22 cannot detect R407C leakage.

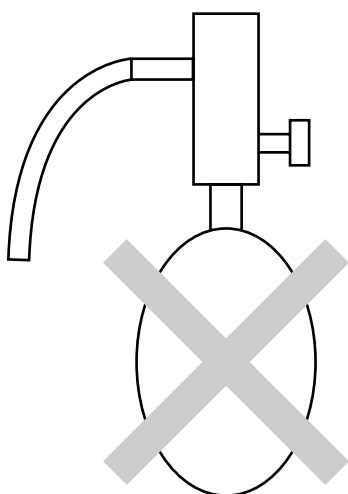

Halide torch

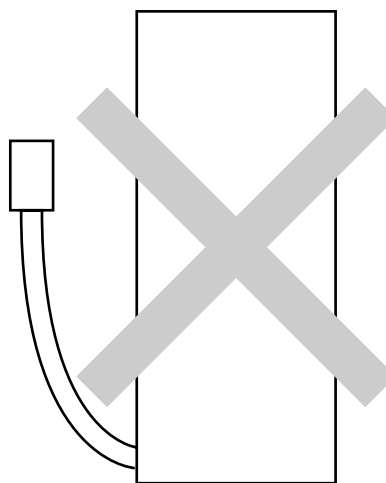

R22 leakage detector

Items to be strictly observed :

1. Pressurize the equipment with nitrogen up to the design pressure and then judge the equipment's airtightness, taking temperature variations into account.
2. When investigating leakage locations using a refrigerant, be sure to use R407C.
3. Ensure that R407C is in a liquid state when charging.

Reasons :

1. Use of oxygen as the pressurized gas may cause an explosion.
2. Charging with R407C gas will lead the composition of the remaining refrigerant in the cylinder to change and this refrigerant can then not be used.

Note :

- A leakage detector for R407C is sold commercially and it should be purchased.

[6] Vacuuming

1. Vacuum pump with check valve

A vacuum pump with a check valve is required to prevent the vacuum pump oil from flowing back into the refrigerant circuit when the vacuum pump power is turned off (power failure).

It is also possible to attach a check valve to the actual vacuum pump afterwards.

2. Standard degree of vacuum for the vacuum pump

Use a pump which reaches 0.5 Torr (500 MICRON) or below after 5 minutes of operation.

In addition, be sure to use a vacuum pump that has been properly maintained and oiled using the specified oil. If the vacuum pump is not properly maintained, the degree of vacuum may be too low.

3. Required accuracy of the vacuum gauge

Use a vacuum gauge that can measure up to 5 Torr. Do not use a general gauge manifold since it cannot measure a vacuum of 5 Torr.

4. Evacuating time

- Evacuate the equipment for 1 hour after -755 mmHg (5 Torr) has been reached.
- After envacuating, leave the equipment for 1 hour and make sure the that vacuum is not lost.

5. Operating procedure when the vacuum pump is stopped


In order to prevent a backflow of the vacuum pump oil, open the relief valve on the vacuum pump side or loosen the charge hose to drawn in air before stopping operation.

The same operating procedure should be used when using a vacuum pump with a check valve.

[7] Charging of Refrigerant

R407C must be in a liquid state when charging, because it is a non-azeotropic refrigerant.


For a cylinder with a syphon attached

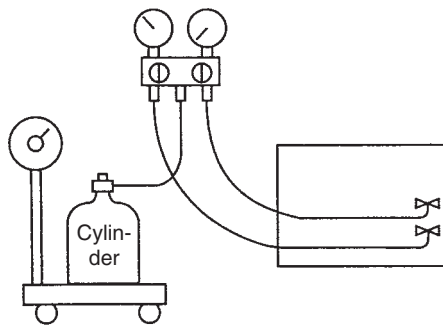



Cylinder color identification

R407C-brown

For a cylinder without a syphon attached

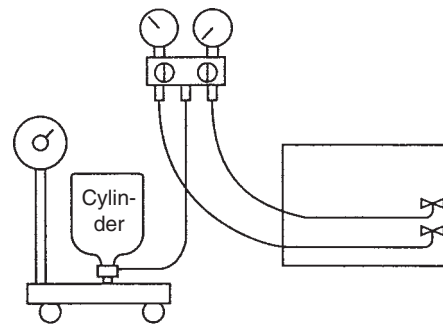

Charged with liquid refrigerant



Reasons :

1. R407C is a mixture of 3 refrigerants, each with a different evaporation temperature. Therefore, if the equipment is charged with R407C gas, then the refrigerant whose evaporation temperature is closest to the outside temperature is charged first while the rest of refrigerants remain in the cylinder.

Note :

- In the case of a cylinder with a syphon, liquid R407C is charged without turning the cylinder up side down. Check the type of cylinder before charging.

[8] Dryer

1. Replace the dryer when the refrigerant circuit is opened (Ex. Change the compressor, full gas leakage). Be sure to replace the dryer with a CITY MULTI Series WR2 (PQRY) (For use with R407C).


If any other product is used, the unit will be damaged.

2. Opening the refrigerant circuit after changing to a new dryer is less than 1 hour. The replacement of the dryer should be the last operation performed.

2 COMPONENT OF EQUIPMENT


[1] Appearance of Components

Heat source unit

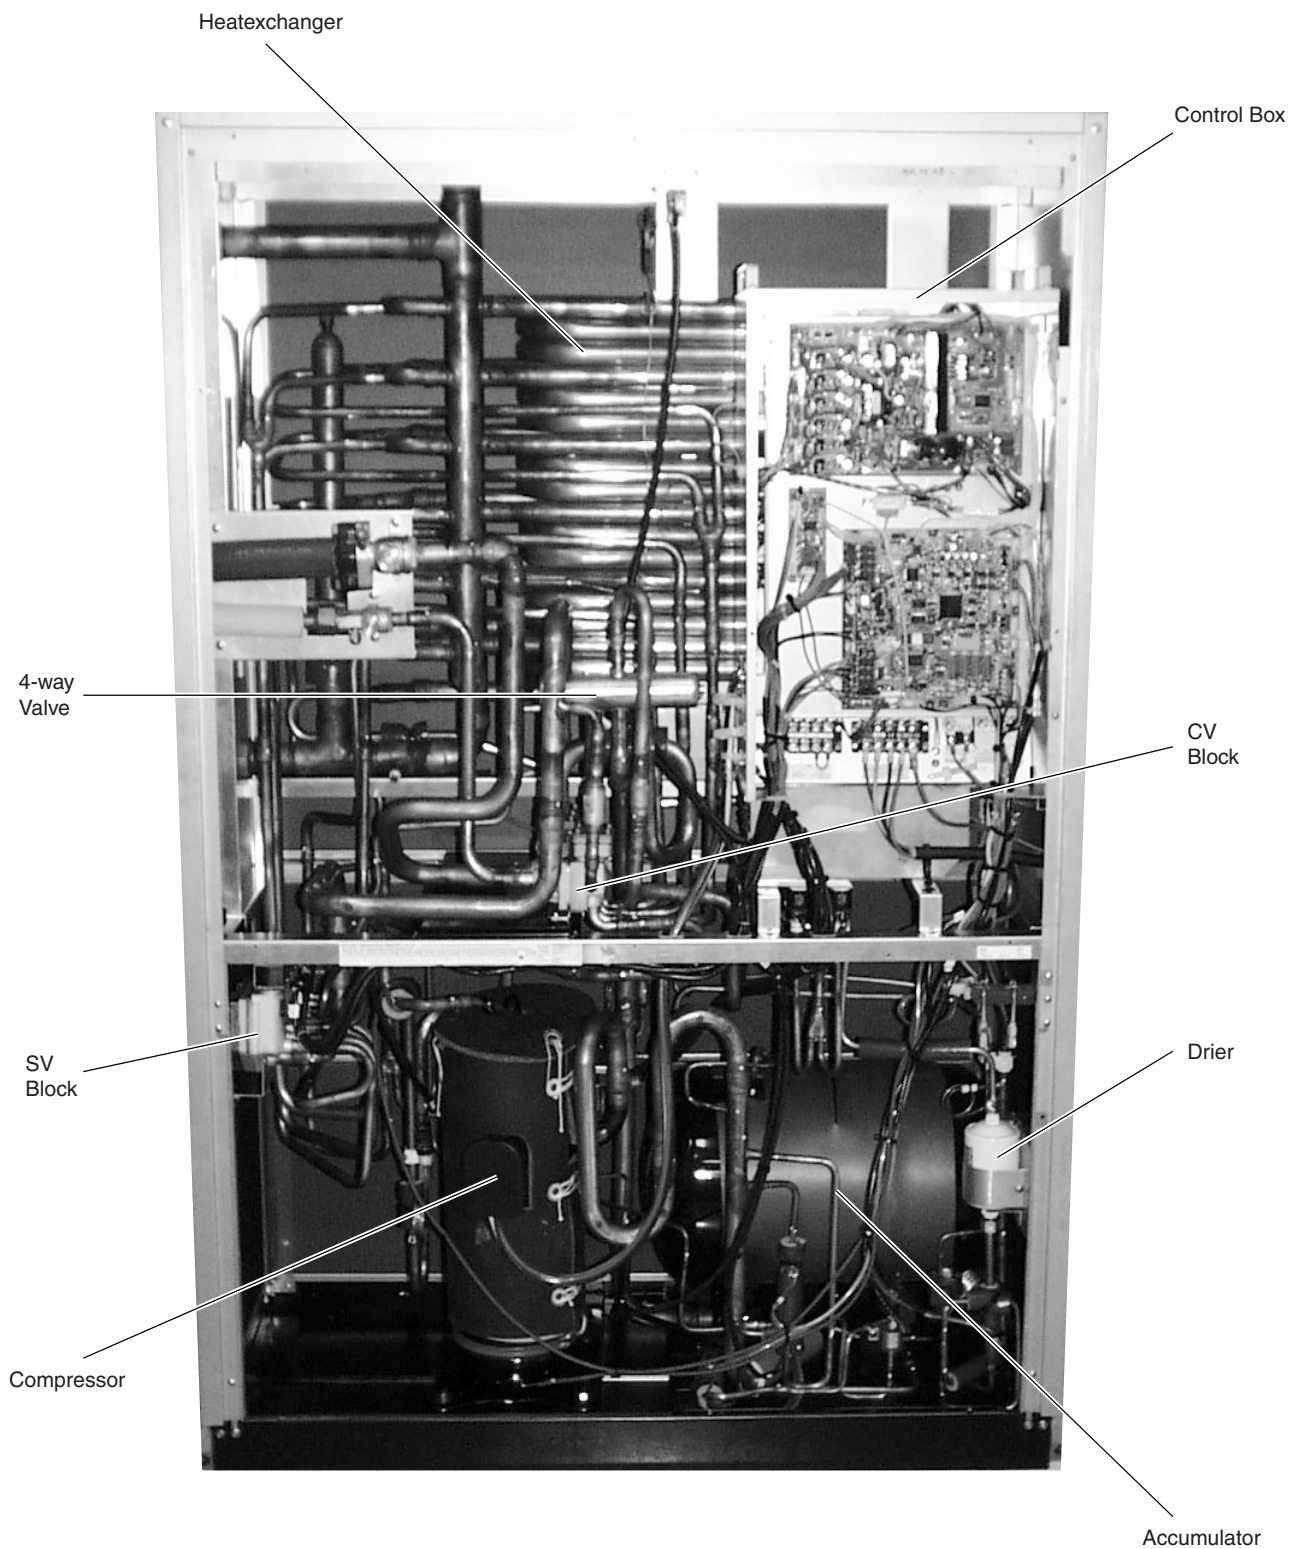


Control Box


Front View

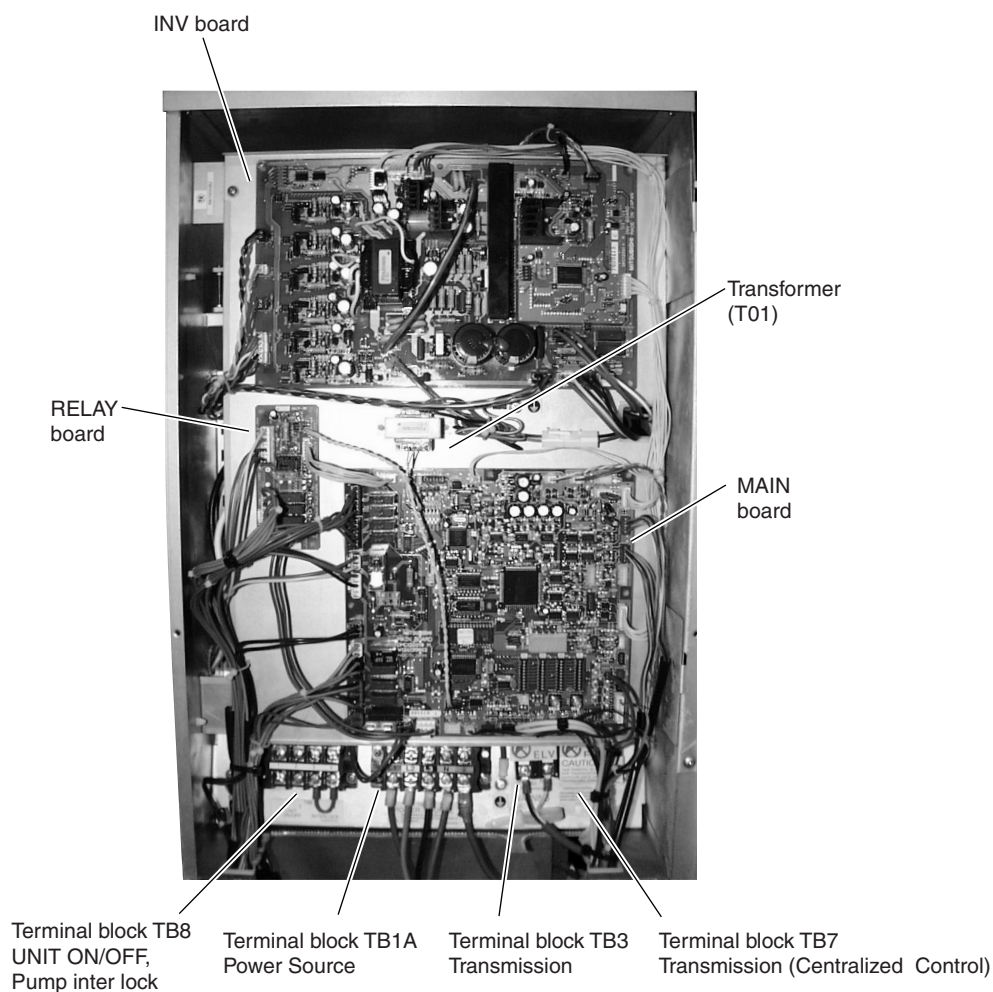


Inner View

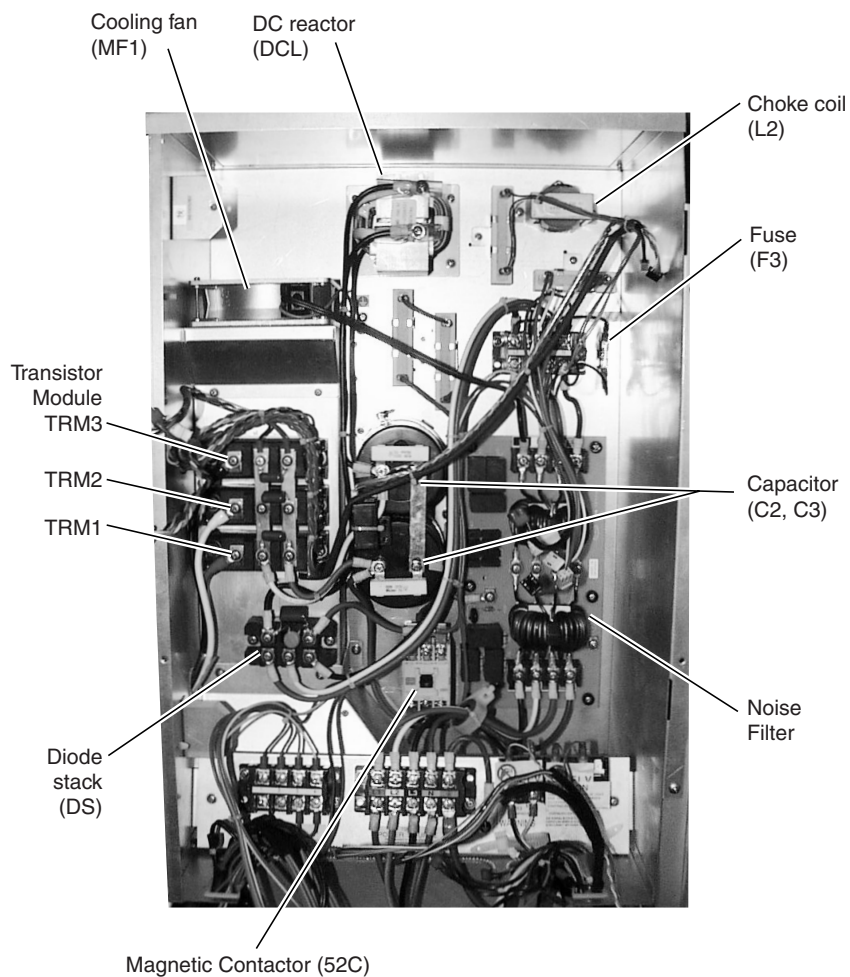


MAIN board

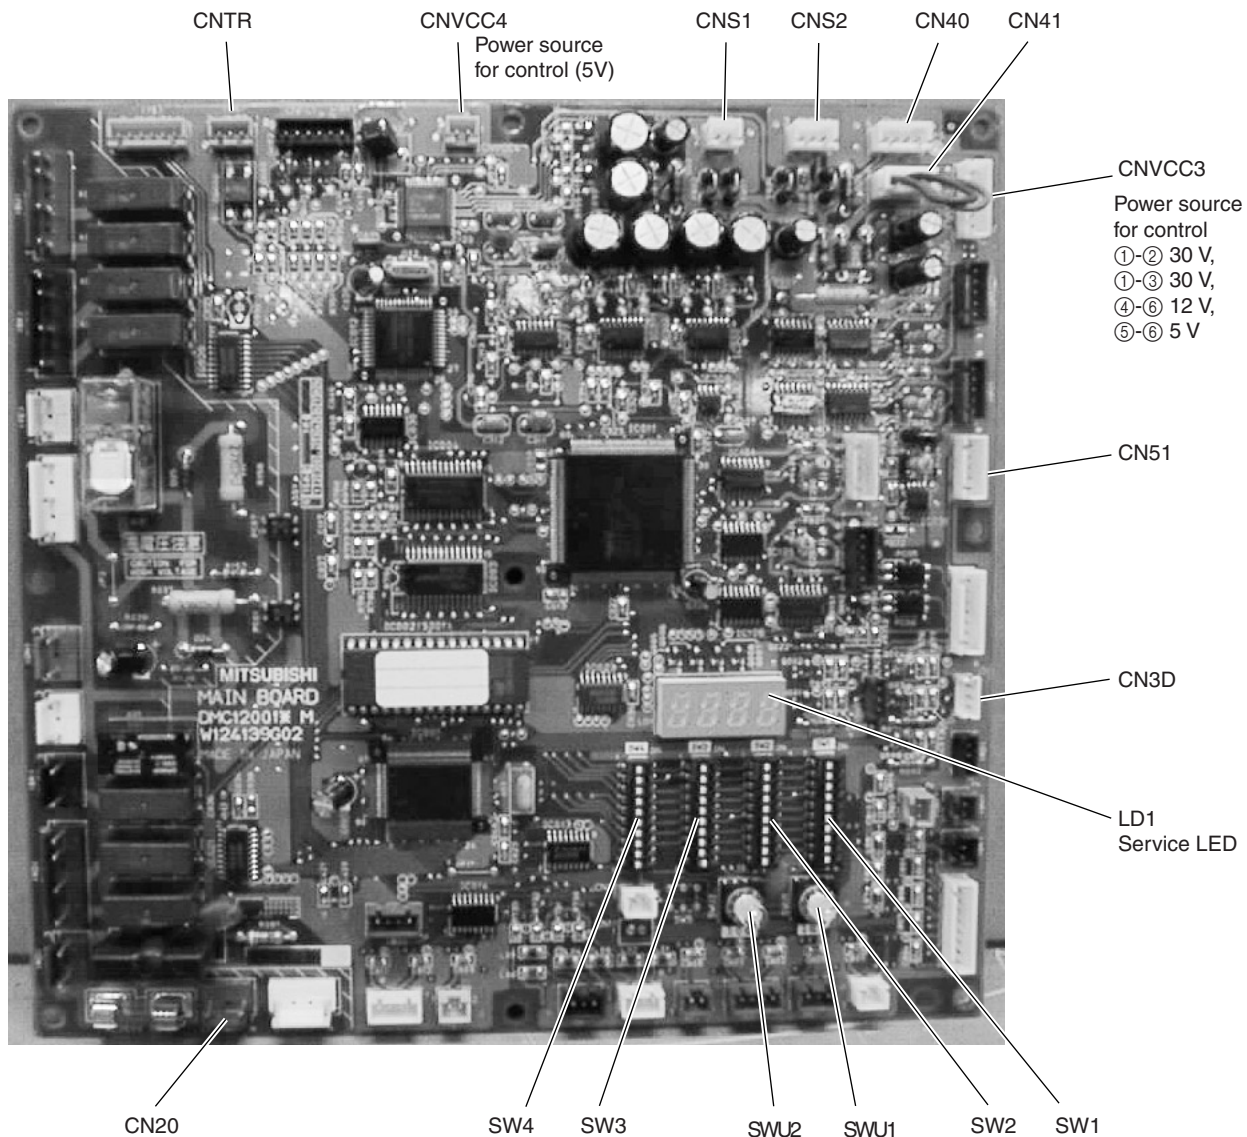

INV board

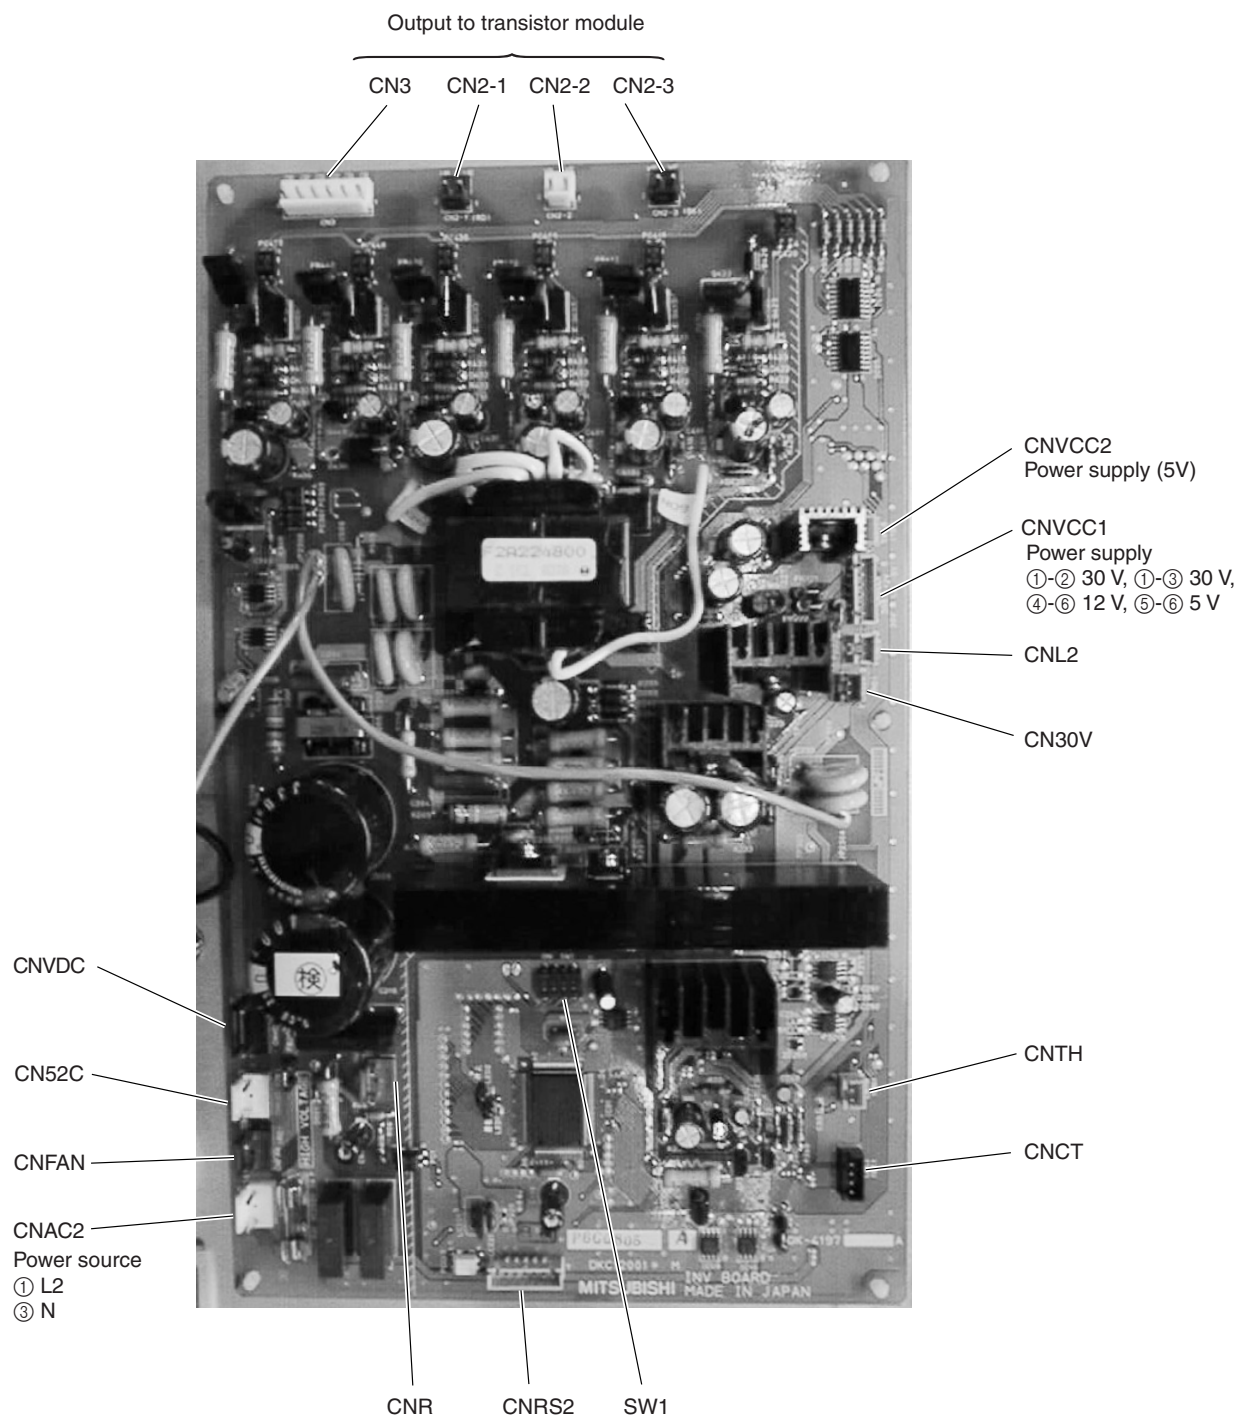


RELAY board

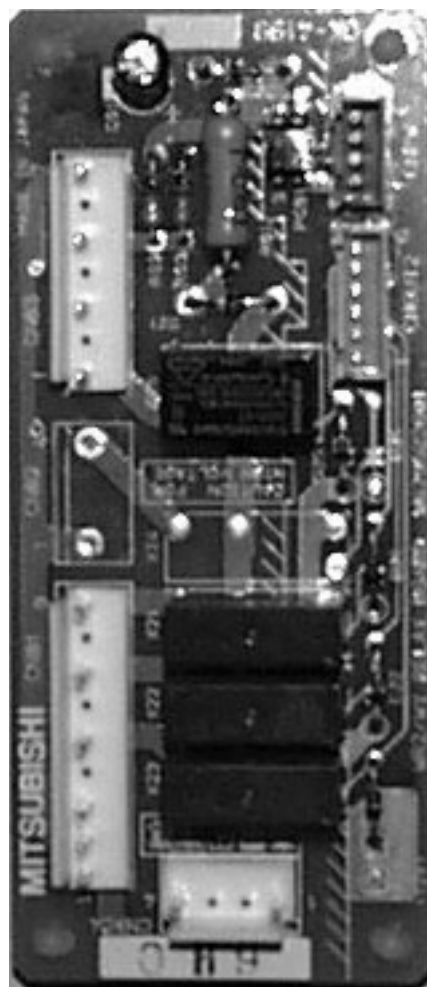


BC controller


BC board

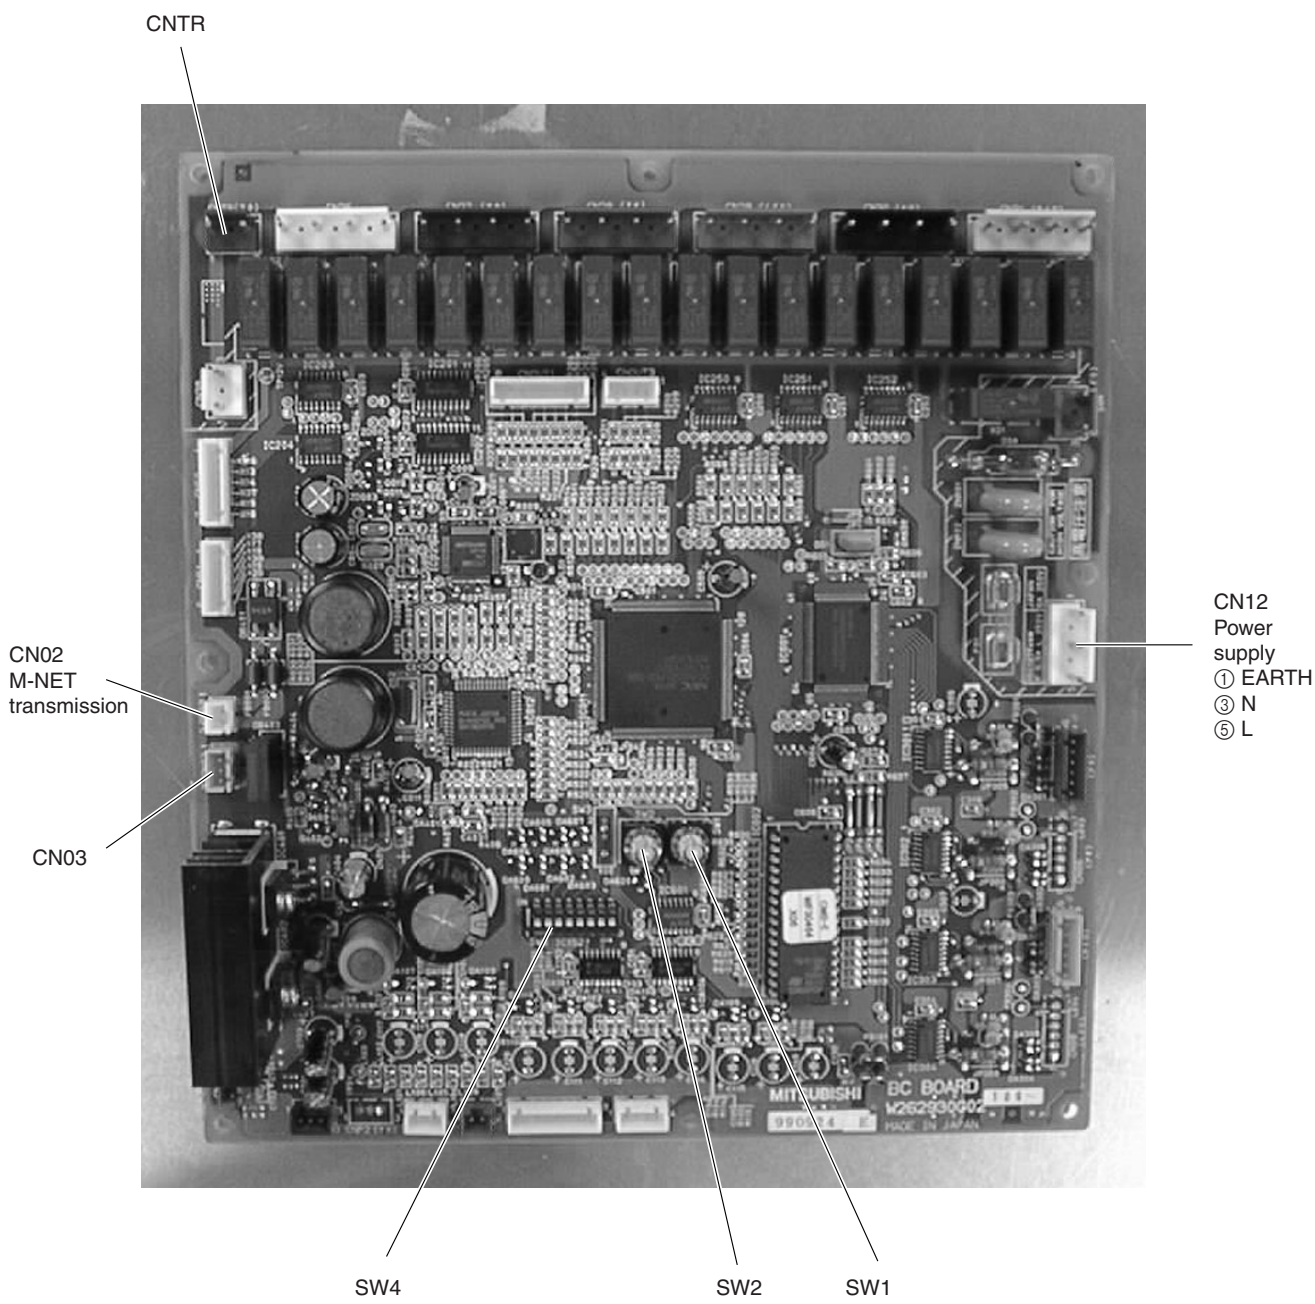

RELAY 10 board

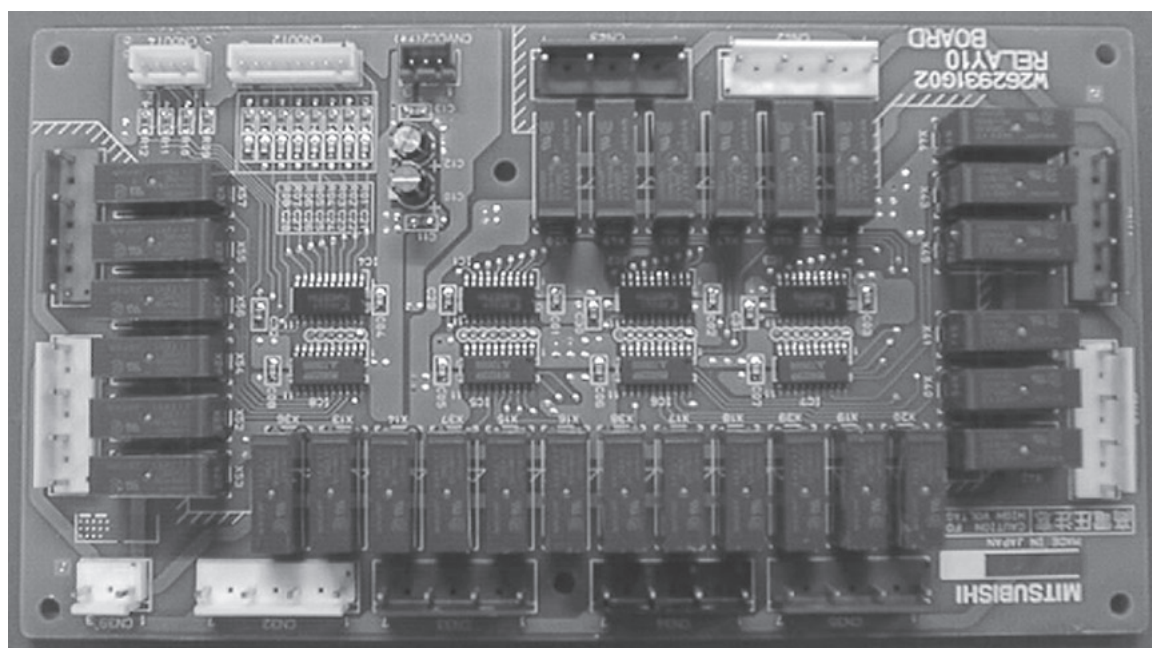

RELAY 4 board

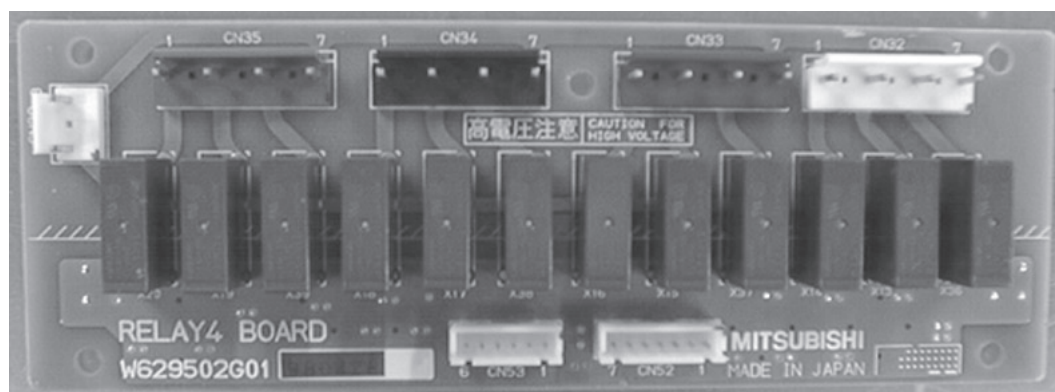

[2] Refrigerant Circuit Diagram and Thermal Sensor

Heat source unit


*Operation data of PQRV-P250YMF-B

*Operation Condition Cooling : Indoor 27/19.5 Inlet water 30°C Water volume 4.93m³/h
Heating : Indoor 21/- Inlet water 20°C
Pipe length 10m
Indoor capacity 100%


* [C] [H]

Standard operation data are shown for cooling
in the C column and heating in the H column.

Units for each value are
: °C for TH1 ~ TH10, THINV
: MPa for 63HS, 63LS

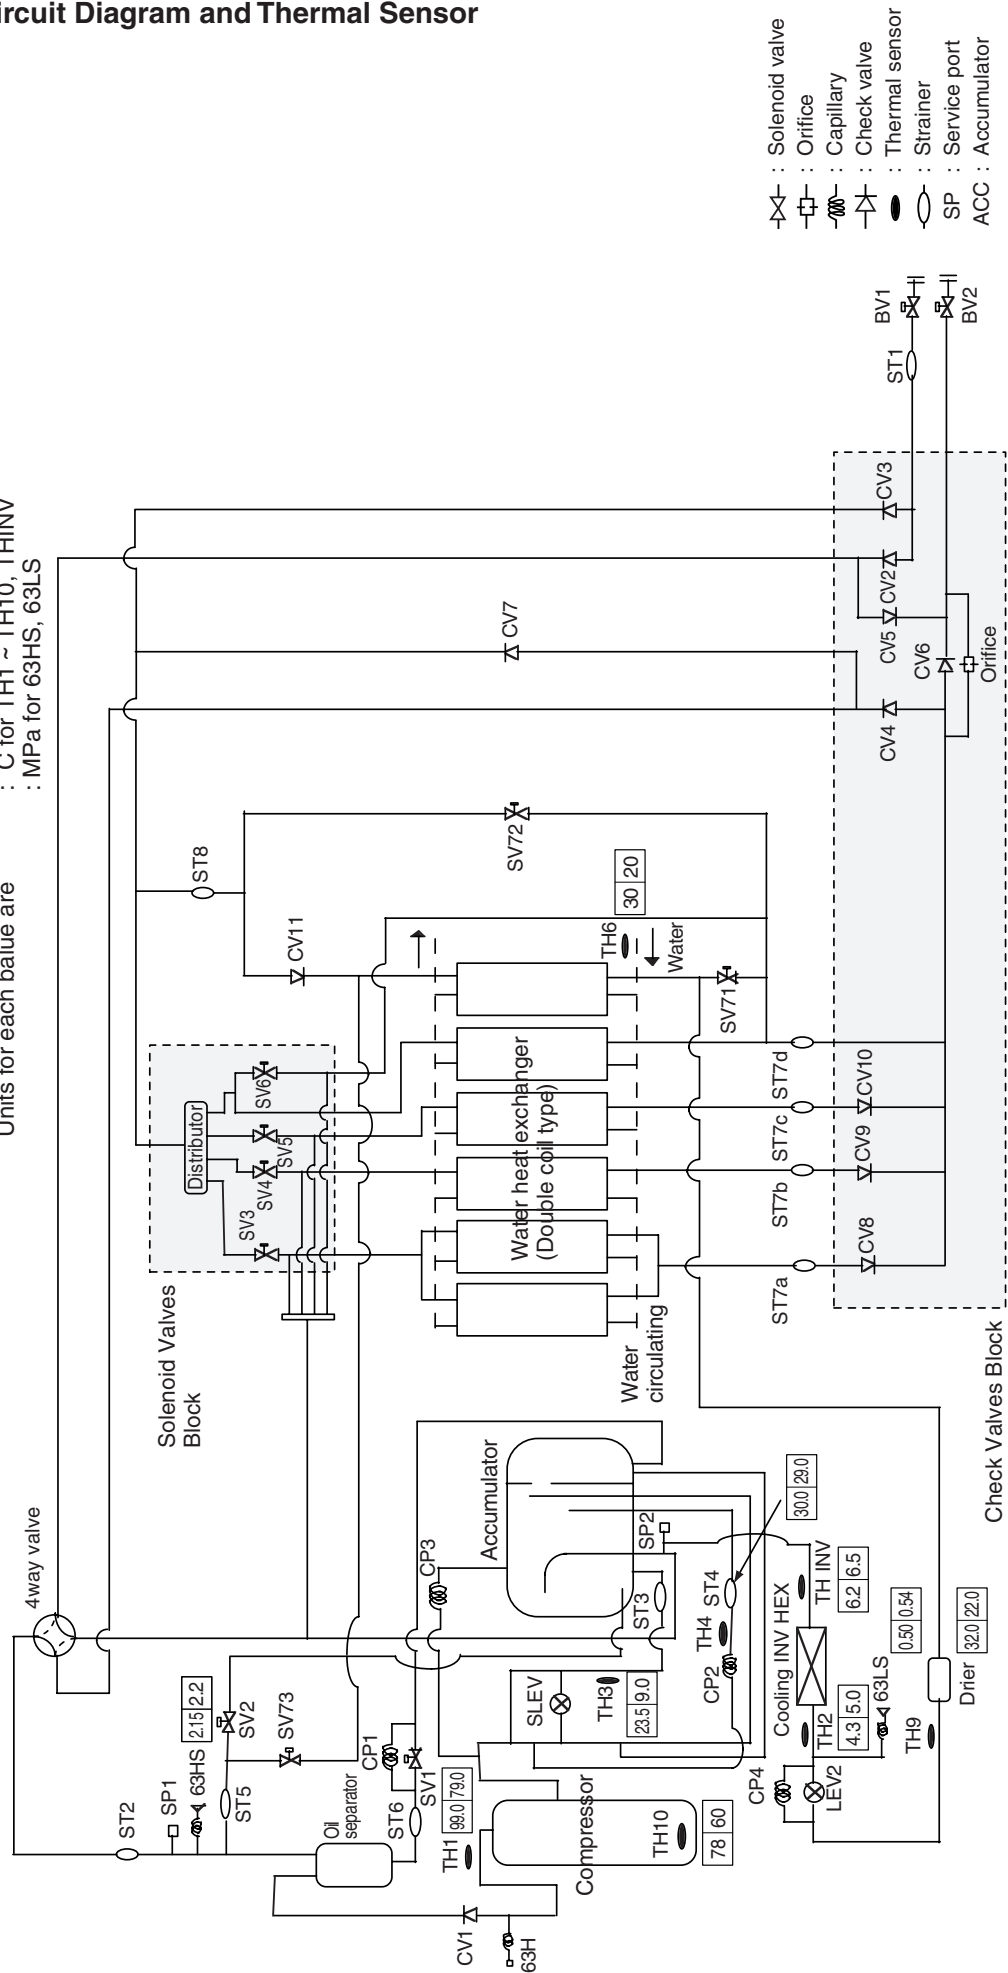


BC controller, Indoor unit

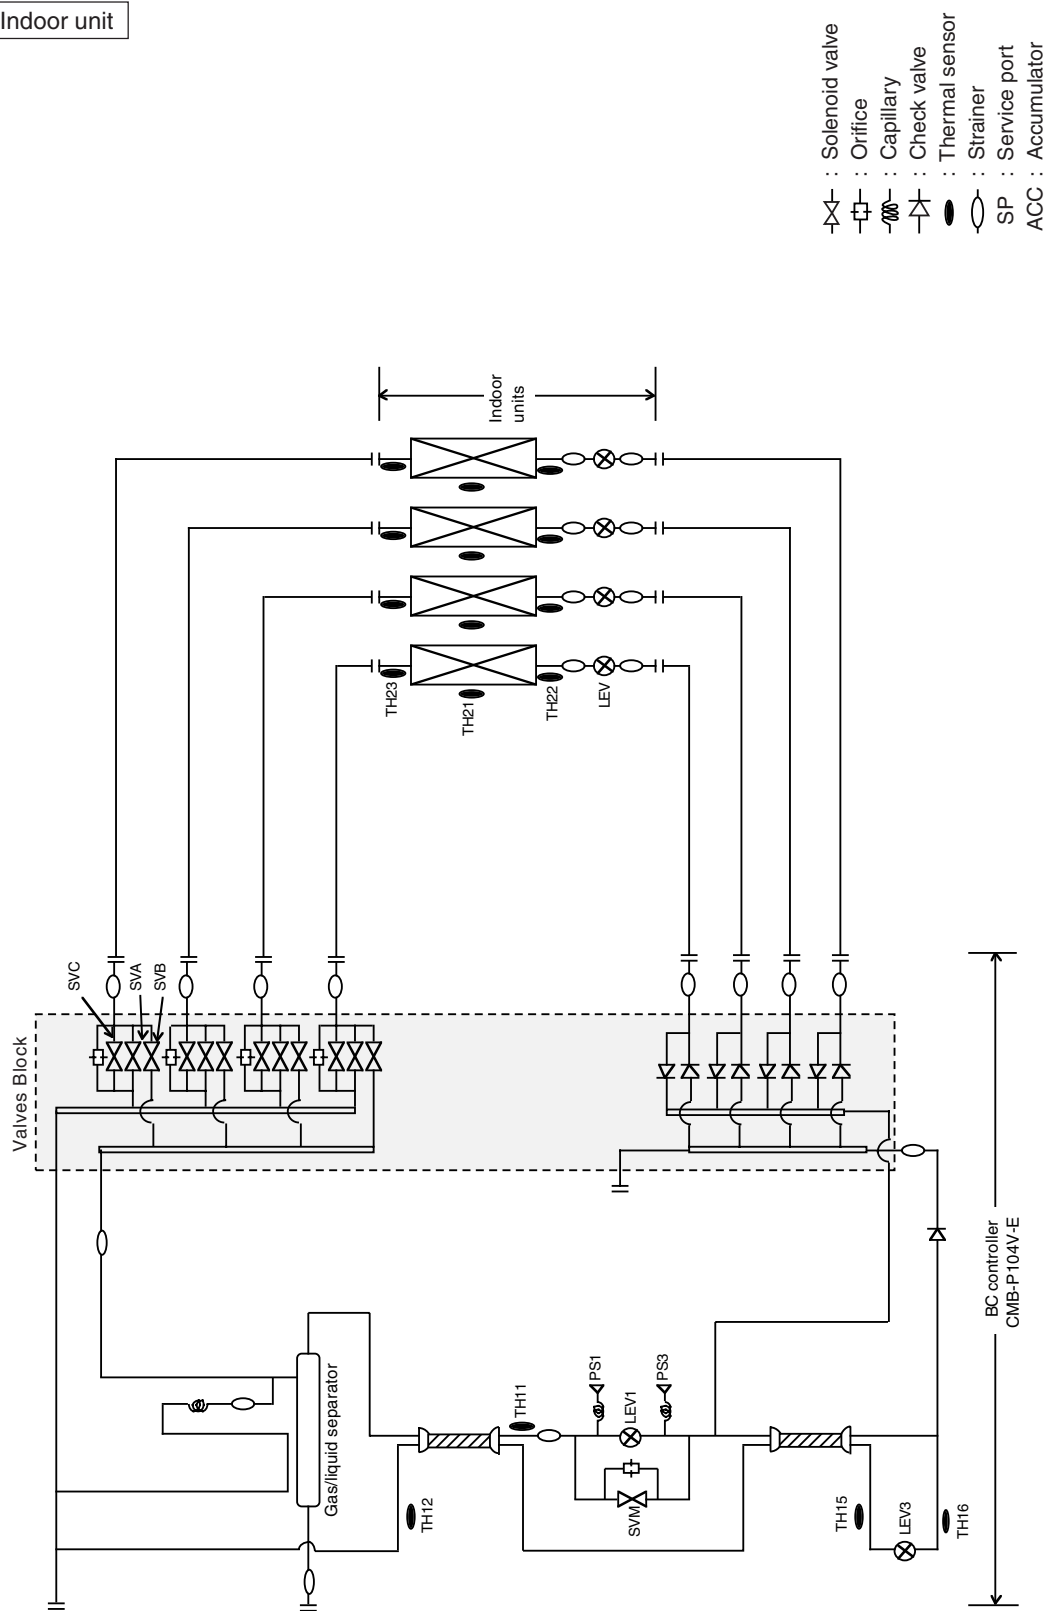

[3] Equipment Composition


A. Heat source unit

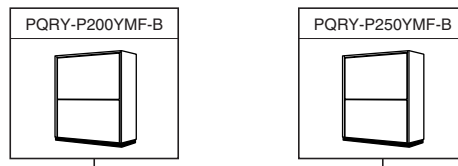

B. BC controller

4-branch type	5-branch type	6-branch type	8-branch type	10-branch type	13-branch type	16-branch type
CMB-P104V-E	CMB-P105V-E	CMB-P106V-E	CMB-P108V-E	CMB-P1010V-E	CMB-P1013V-E	CMB-P1016V-E

C. Branch pipe kit/joint pipe kit

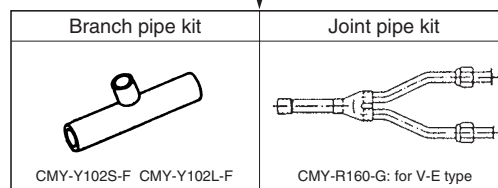


D. Indoor unit

Model	Cassette ceiling			Ceiling concealed	Ceiling mounted built-in	Wall mounted	Ceiling suspended	Floor standing	
	1-way flow	2-way flow	4-way flow					Exposed	Concealed
Capacity	PMFY-P	PLFY-P	PLFY-P	PEFY-P	PDFY-P	PKFY-P	PCFY-P	PFFY-P	PFFY-P
20	20VMB	20VLM	-	20VML	20VM	20VAM	-	20VLEM	20VLRM
25	25VBM	25VLM	-	25VML	25VM	25VAM	-	25VLEM	25VLRM
32	32VBM	32VLM	32VKM	32VML	32VM	32VGM	-	32VLEM	32VLRM
40	40VBM	40VLM	40VKM	40VMH	40VM	40VGM	40VGM	40VLEM	40VLRM
50	-	50VLM	50VKM	50VMH	50VM	50VGM	-	50VLEM	50VLRM
63	-	63VLM	63VKM	63VMH	63VM	-	63VGM	63VLEM	63VLRM
71	-	-	-	71VMH	71VM	-	-	-	-
80	-	80VLM	80VKM	80VMH	80VM	-	-	-	-
100	-	100VLM	100VKM	100VMH	100VM	-	100VGM	-	-
125	-	125VLM	125VKM	125VMH	125VM	-	125VGM	-	-
140	-	-	-	140VMH	-	-	-	-	-

E. Option (panel)

Model	Decoration panel		
Capacity	PMP-	CMP-	PLP-
20	40MB	32LW-F	-
25		40LW-F	3GB
32			
40	-	63LW-F	
50		125LW-F	6GB
63			
80	-	-	-
100, 125	-	-	-

F. Remote controller

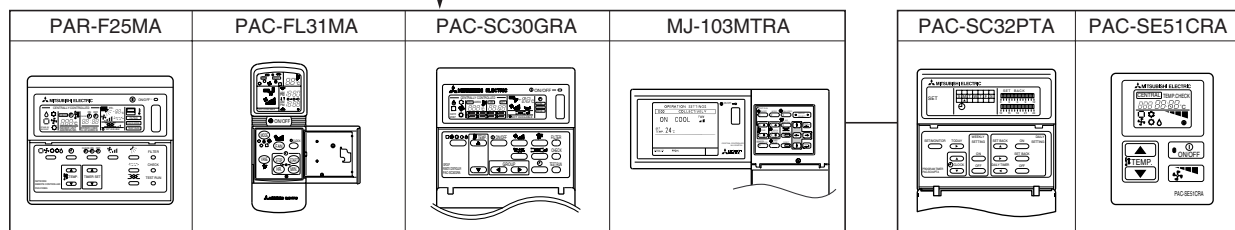


- PQRY-P200-250YMF-B



<Operation of self-diagnosis switch (SW1) and LED display>

Display		Display at LED lighting (blinking) Remarks SW1 operation								
ON:1 OFF:0	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> <div>1 2 3 4 5 6 7 8 9 10 (at factory shipment)</div>	FLAG1	FLAG2	FLAG3	FLAG4	FLAG5	FLAG6	FLAG7	FLAG8	
		During compressor run	Crankcase heater	21S4	SV1	SV2	SV3	SV4	Always lighting	
		Display the address and error code by turns								FLAG8 always lights at microcomputer power ON
ON:1 OFF:0	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> <div>1 2 3 4 5 6 7 8 9 10 (at factory shipment)</div>	Check display1 (Blinking)	<div><div>51</div>↔<div>1102</div></div>							
		SV5	SV6	SV71	SV72	SV73	SSR			


* please refer to the service handbook about other switch settings of LED display.



<Symbol explanation>


Symbol	Name
DCL	DC reactor (Power factor improvement)
DCCT	Current Sensor
ZNR4	Varistor
52C	Magnetic contactor (Inverter main circuit)
MF1	Radiator panel
L2	Chock coil (Transmission)
DS	Diode stack
TRM1~3	Power transistor module
NF	Niose Filter
FB1	Ferrite core
SSR	Solid state relay
21S4	4-way valve
SV1, SV2	Solenoid valve (Discharge-suction bypass)
SV3~6	Solenoid valve (Heat exchanger capacity control)
SV71~73	Solenoid valve (Heat exchanger capacity control)
LEV2	Electronic expansion valve (Heat exchanger for inverter)
SLEV	Electronic expansion valve (Oil return)
63HS	High pressure sensor
63LS	Low pressure sensor
X12,4~10	Aux. relay
X21~23,25	
TH1	Thermistor Discharge pipe temp. detect
TH2	Saturation evapo. temp. detect
TH3	Accumulator liquid temp. detect
TH4	Upper
TH6	Lower
TH9	OA temp. detect
TH10	High pressure liquid temp.
THHS	Compressor shell temp.
THINV	Radiator panel temp. detect
	Outlet temp. detect of heat exchanger for inverter
⊕	Earth terminal

<Controller box internal layout>
(Upside)

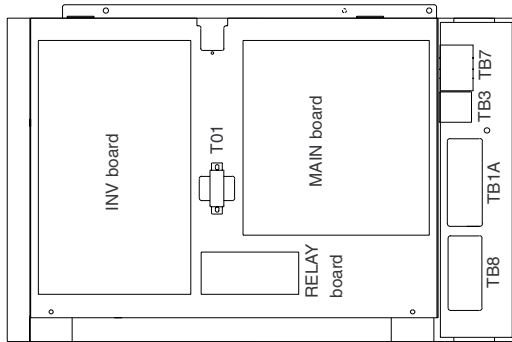


<Unit internal layout>

(Upside)

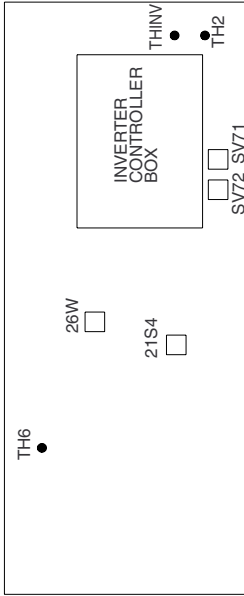


(Underside)

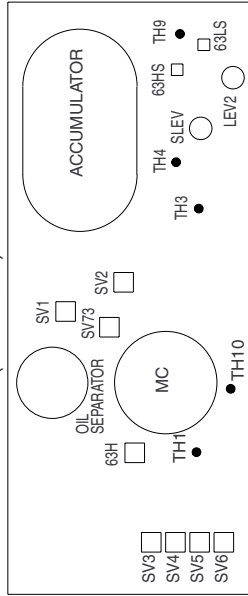

Symbol explanation

Symbol	Name	Symbol	Name
TR	Transformer	SV1 ~ 4A	Solenoid valve
TH11 ~ 16	Thermister sensor	SV1 ~ 4B	Solenoid valve
LEV1,3	Expansion valve	SV1 ~ 4C	Solenoid valve
PS1,3	Pressure sensor	SVM	Solenoid valve
TB01	Terminal block (for power source)		
TB02	Terminal block (for Transmission)		


Note:TB02 is terminal block for transmission.
Never connect power line to it.

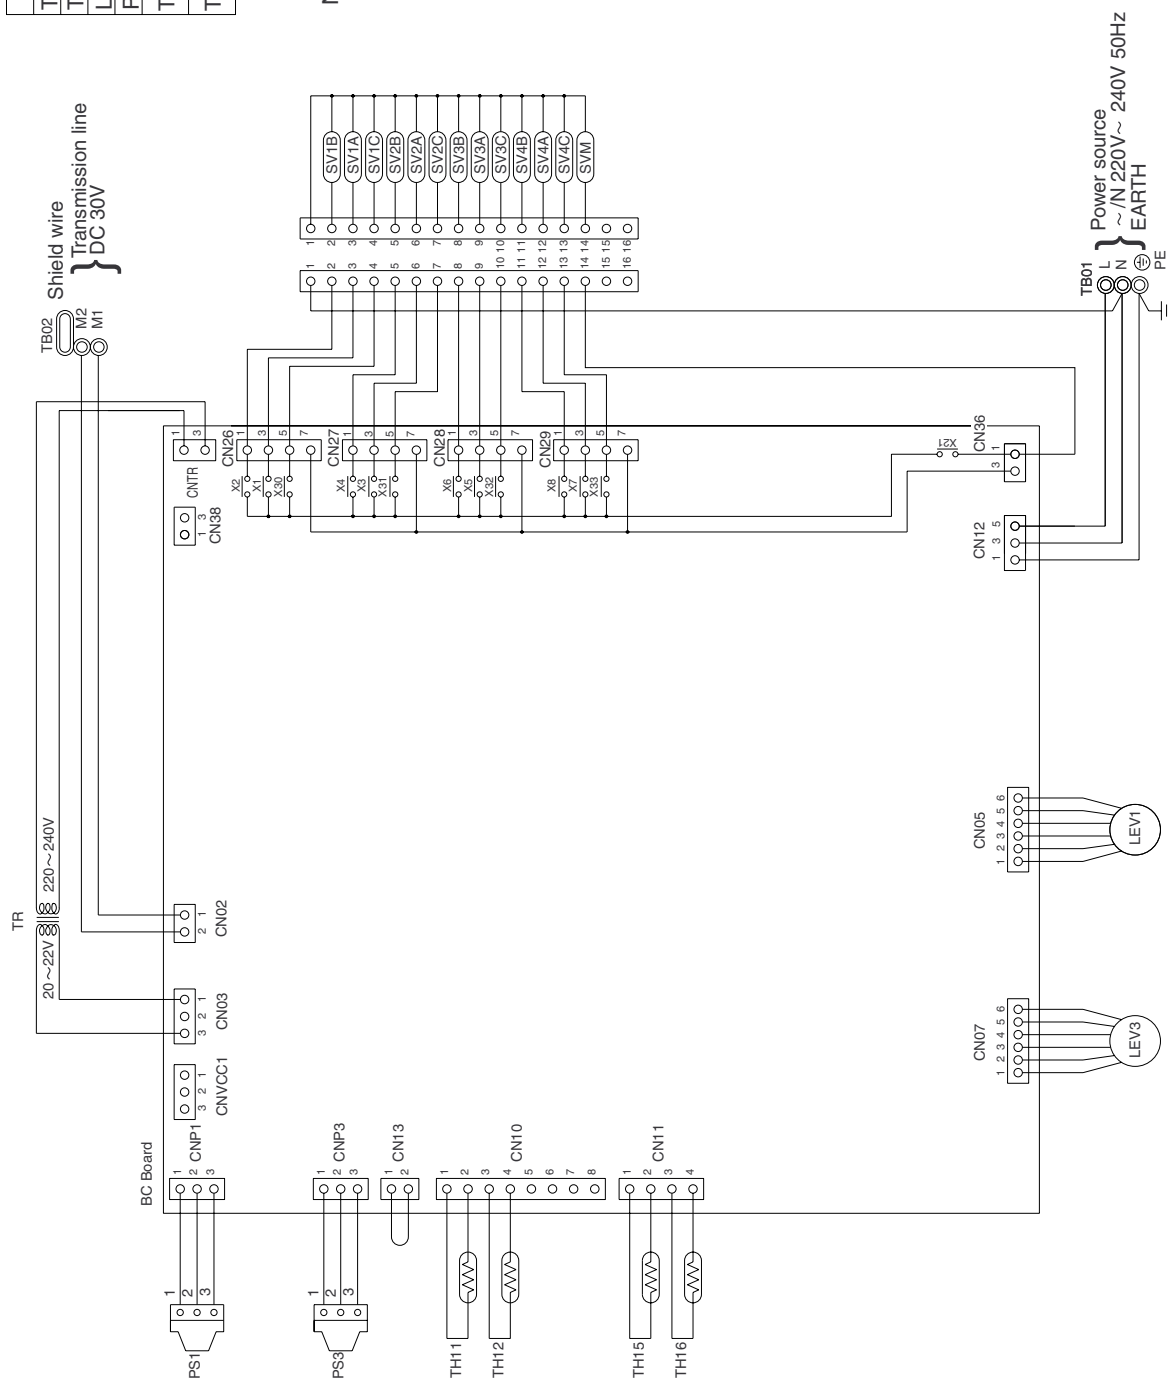

Symbol explanation


Symbol	Name	Symbol	Name
TR	Transformer	SV1 ~ 5A	Solenoid valve
TH11 ~ 16	Thermister sensor	SV1 ~ 5B	Solenoid valve
LEV1,3	Expansion valve	SV1 ~ 5C	Solenoid valve
PS1,3	Pressure sensor	SVM	Solenoid valve
TB01	Terminal block (for power source)		
TB02	Terminal block (for transmission)		

Note: TB02 is terminal block for transmission.
Never connect power line to it.

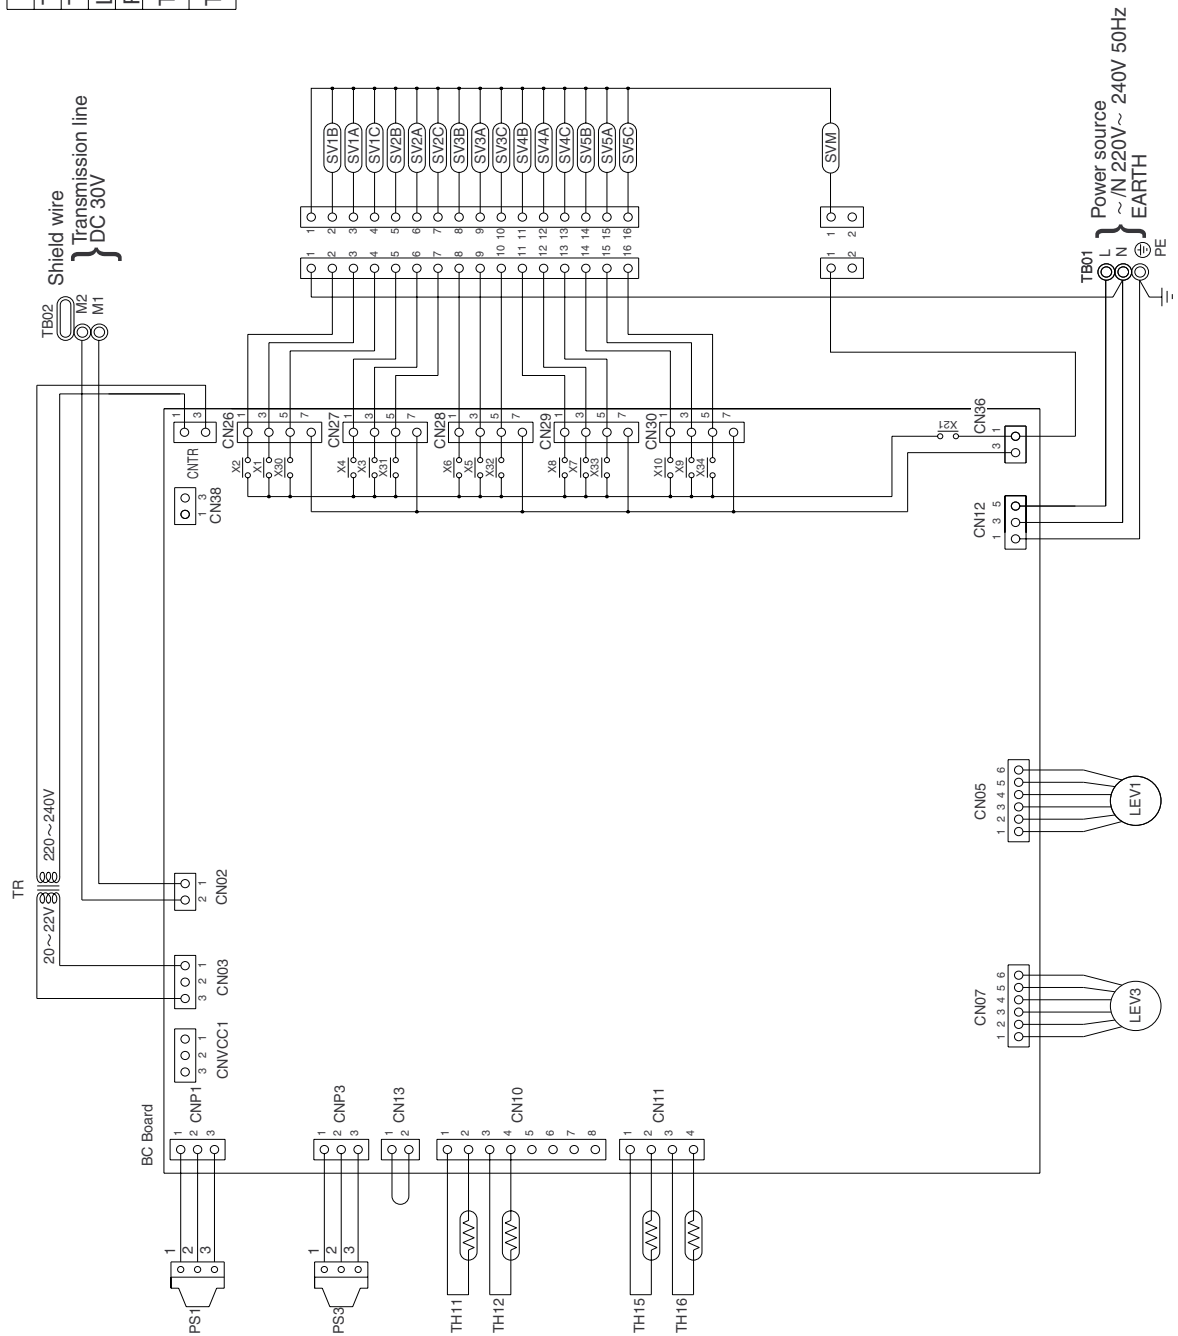


Symbol explanation


Symbol	Name	Symbol	Name
TR	Transformer	SV1 ~ 6A	Solenoid valve
TH11 ~ 16	Thermister sensor	SV1 ~ 6B	Solenoid valve
LEV1,3	Expansion valve	SV1 ~ 6C	Solenoid valve
PS1,3	Pressure sensor	SVM	Solenoid valve
TB01	Terminal block (for power source)		
TB02	Terminal block (for Transmission)		

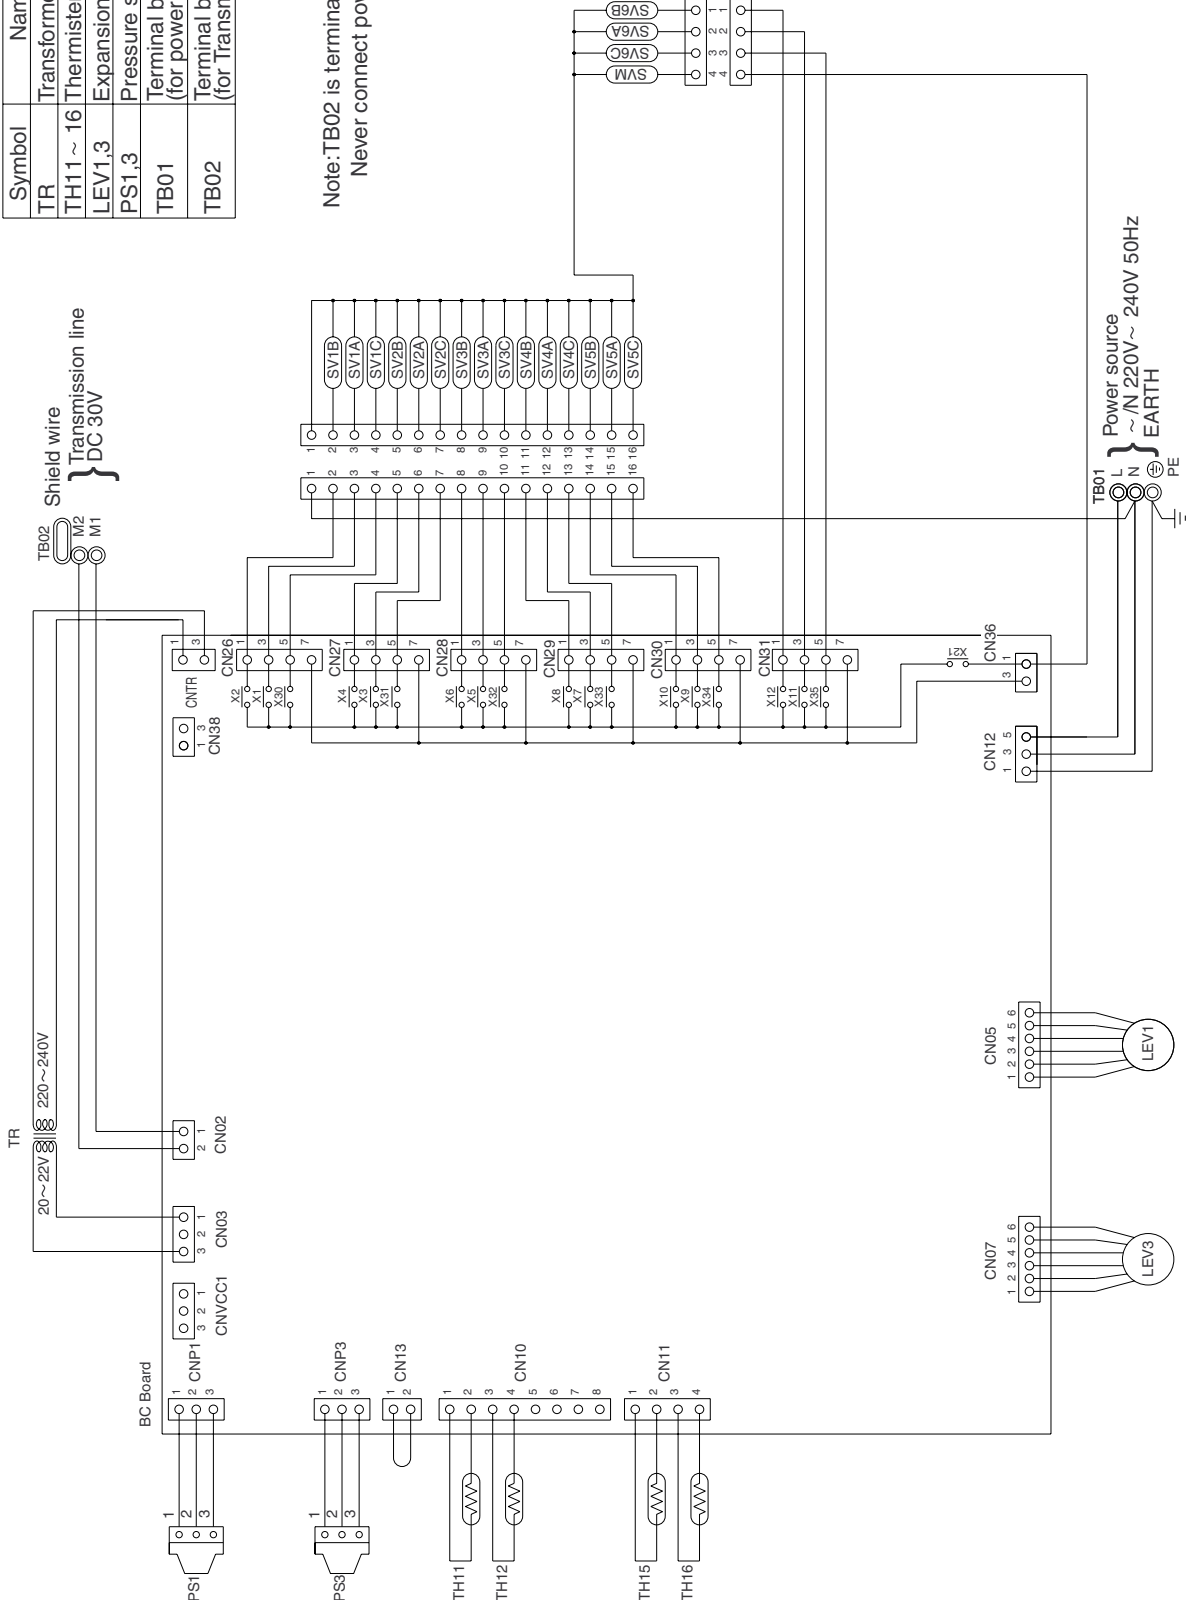

Note: TB02 is terminal block for transmission.
Never connect power line to it.

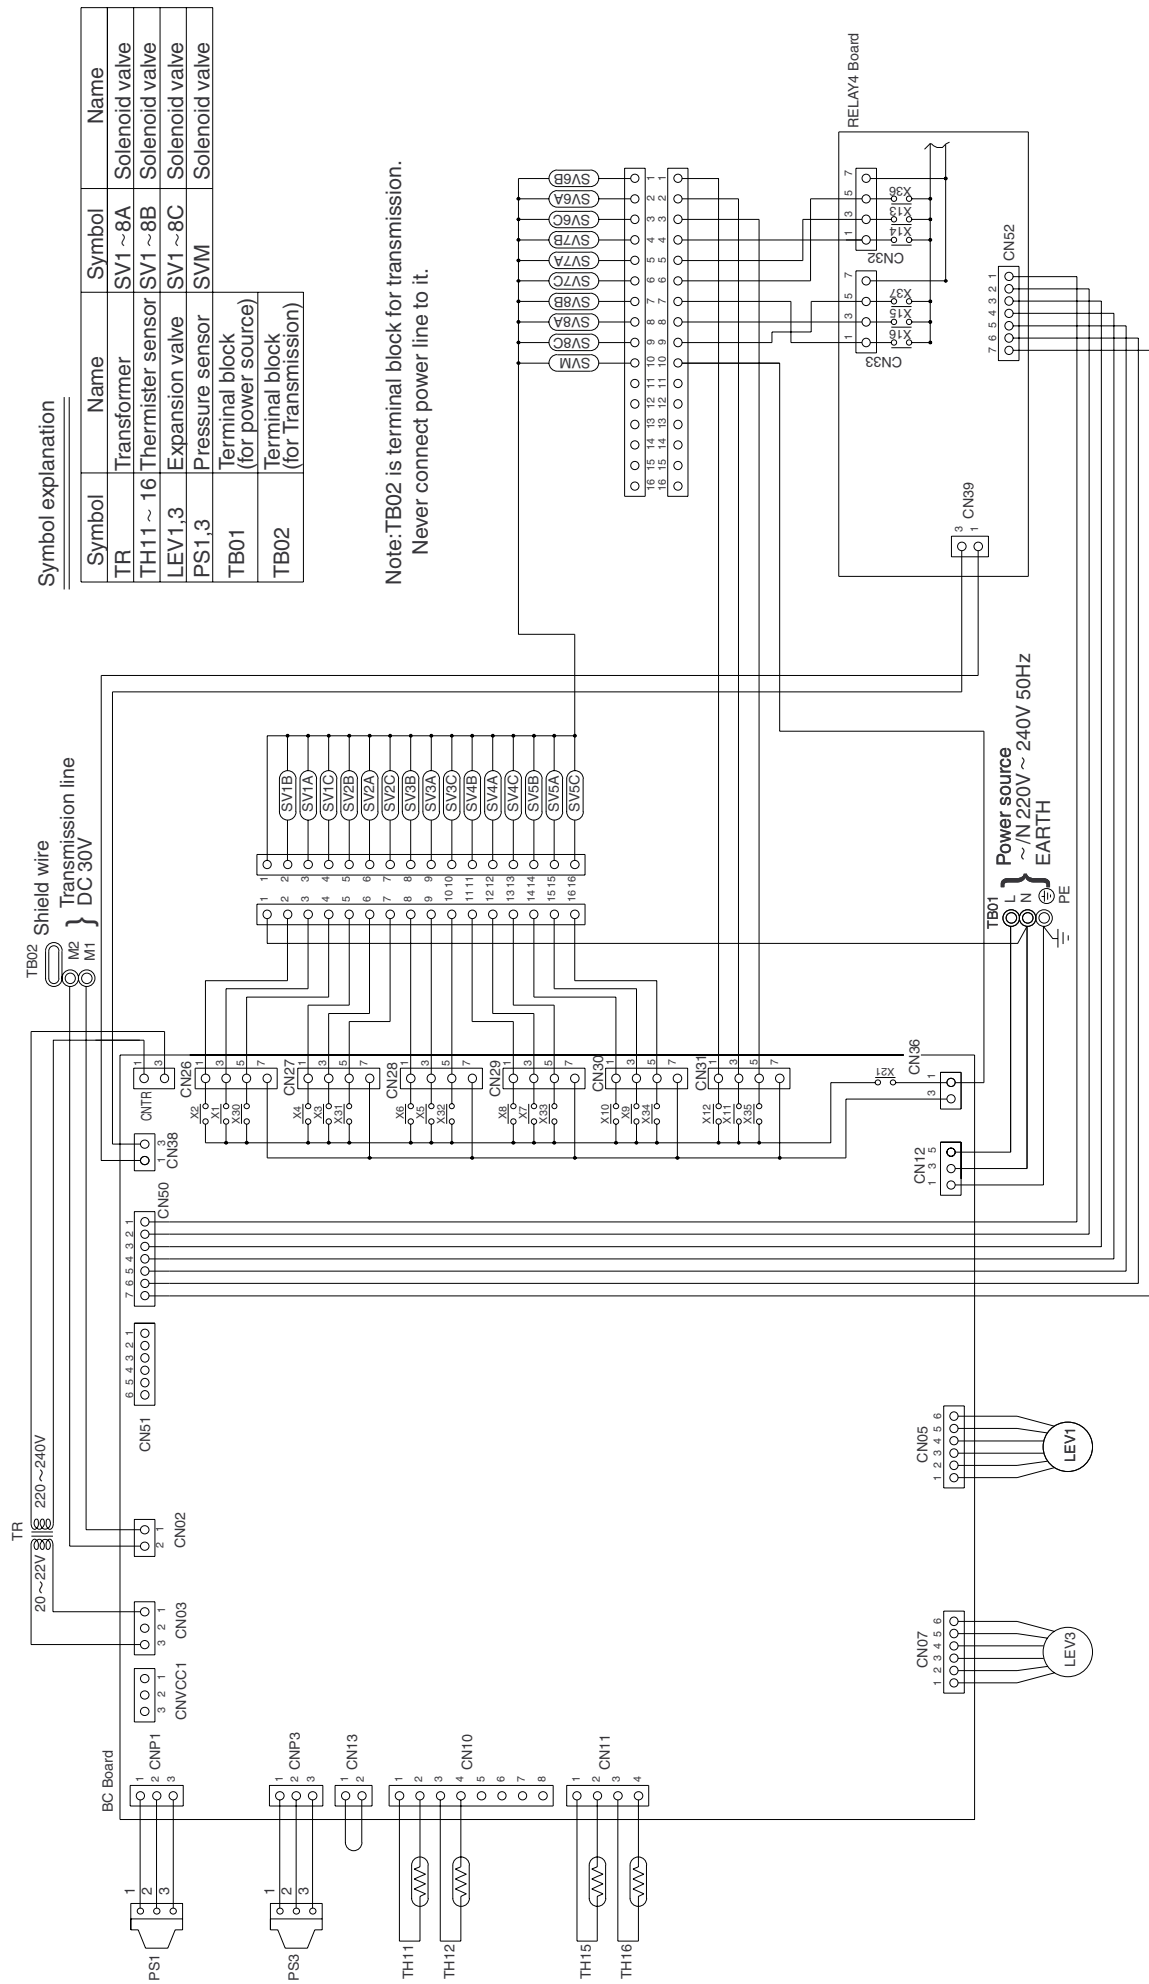

• CMB-P1010V-E

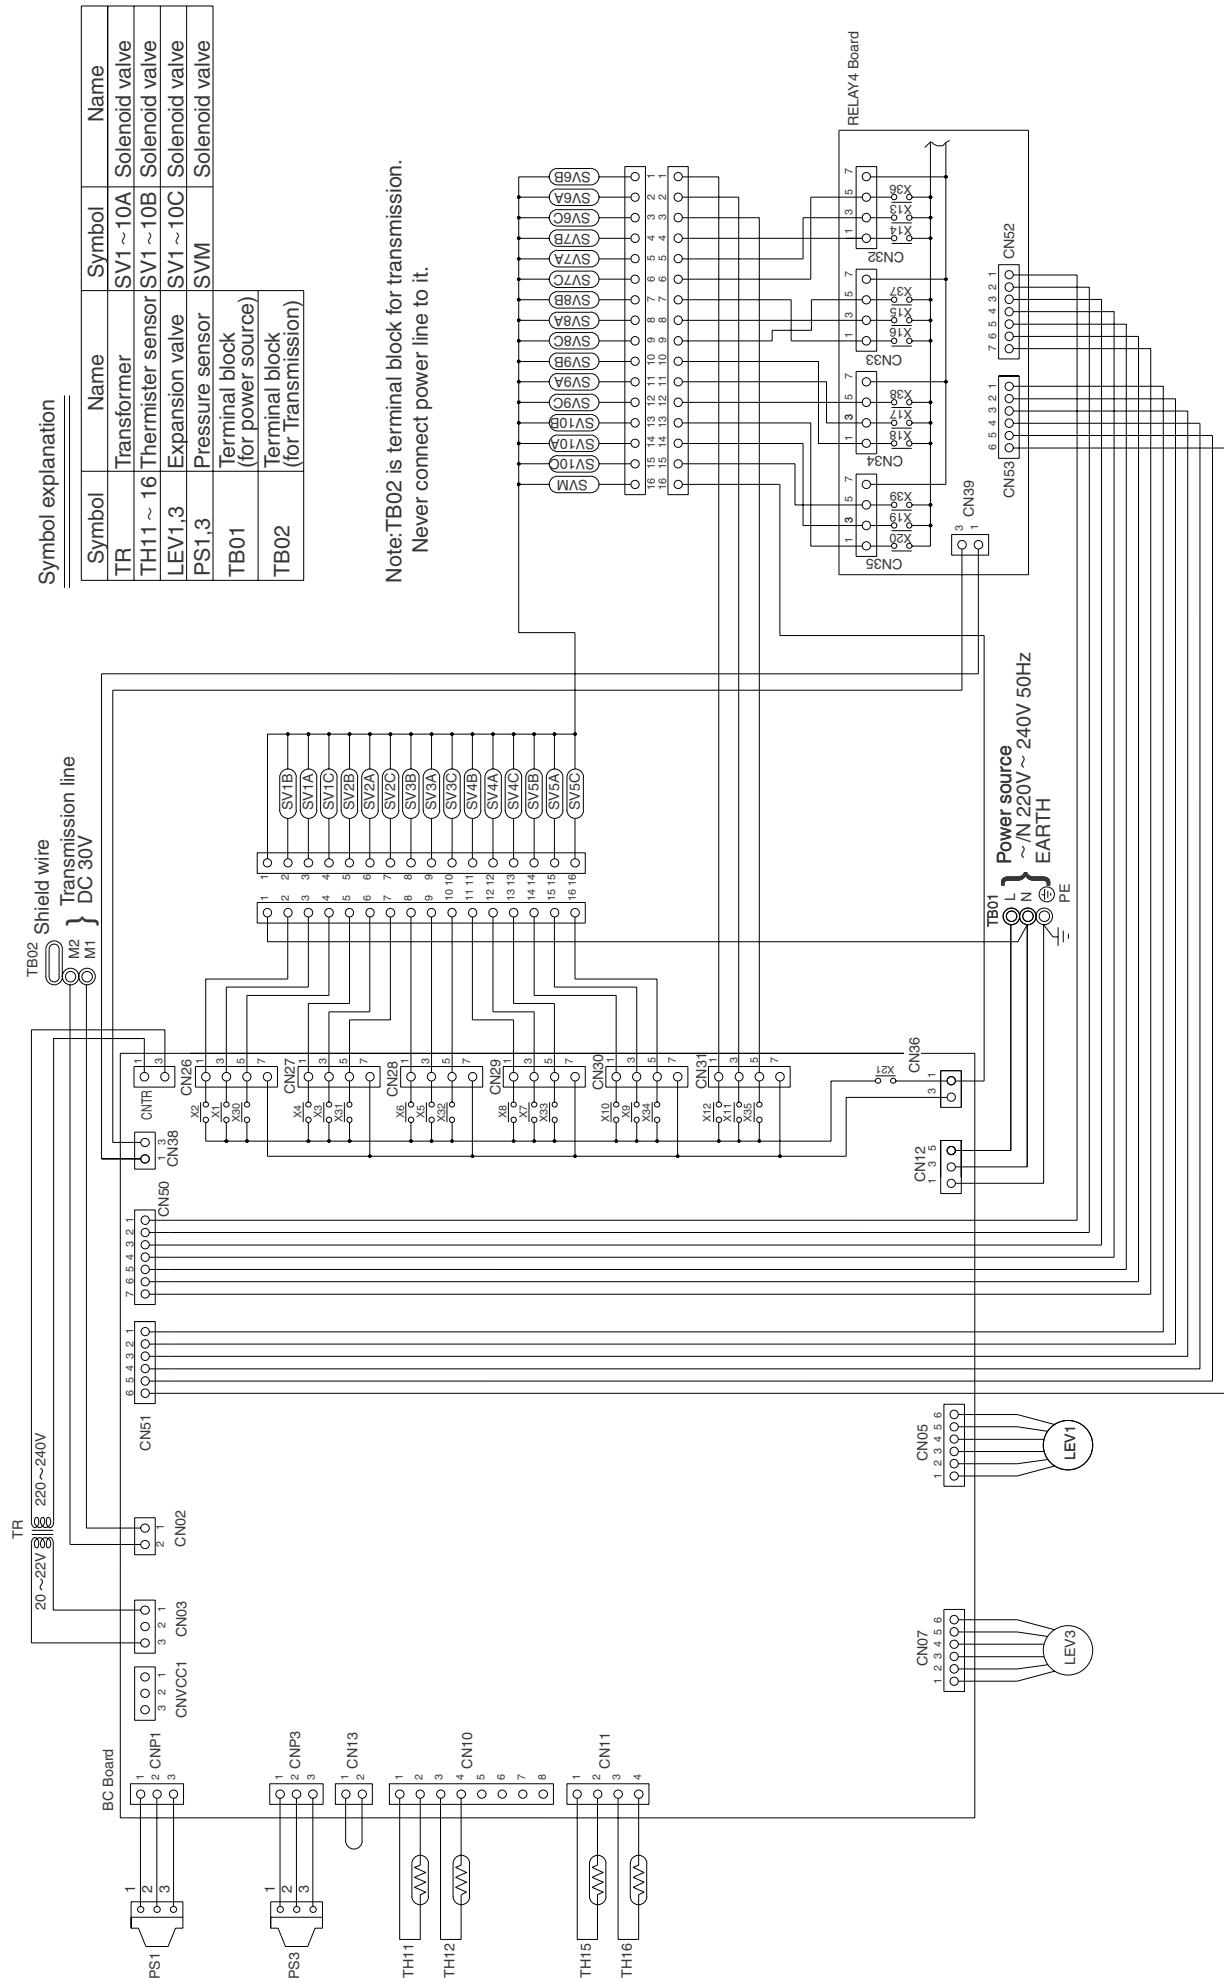


Symbol	Name	Symbol	Name
TR	Transformer	TB01	Terminal block (for power source)
TH11~16	Thermister sensor	TB02	Terminal block (for Transmission)
LEV1,3	Expansion valve	SV1~13A	Solenoid valve
PS1,3	Pressure sensor	SV1~13B	Solenoid valve
		SV1~13C	Solenoid valve
		SVM	Solenoid valve

Note : 1. TB02 is transmission terminal block.

Never connect power line to it.

2. The initial set values of switch on CONT.B are
as follows : SW1 : 0, SW2:0.

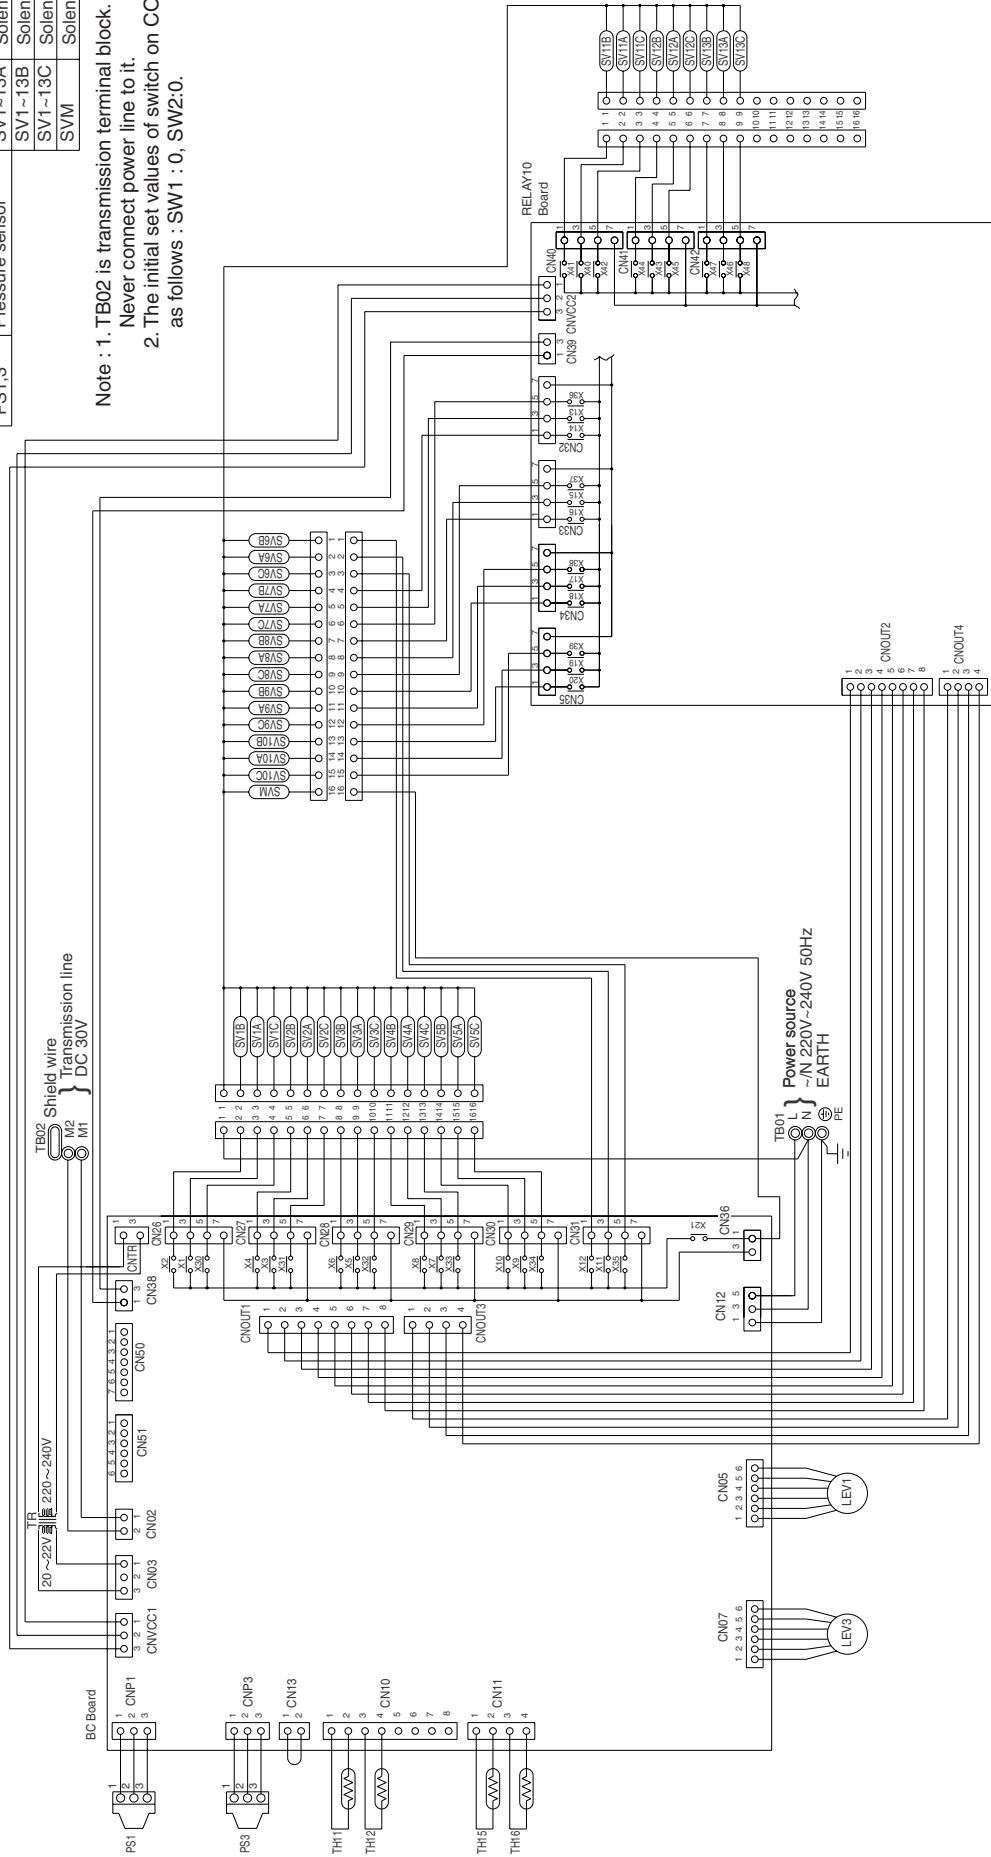


Symbol	Name	Symbol	Name
TR	Transformer	TB01	Terminal block (for power source)
TH11~16	Thermister sensor	TB02	Terminal block (for Transmission)
LEV1,3	Expansion valve	SV1~16A	Solenoid valve
PS1,3	Pressure sensor	SV1~16B	Solenoid valve
		SV1~16C	Solenoid valve
		SVM	Solenoid valve

Note : 1. TB02 is transmission terminal block.

Never connect power line to it.

2. The initial set values of switch on CONT.B are as follows : SW1 : 0, SW2:0.

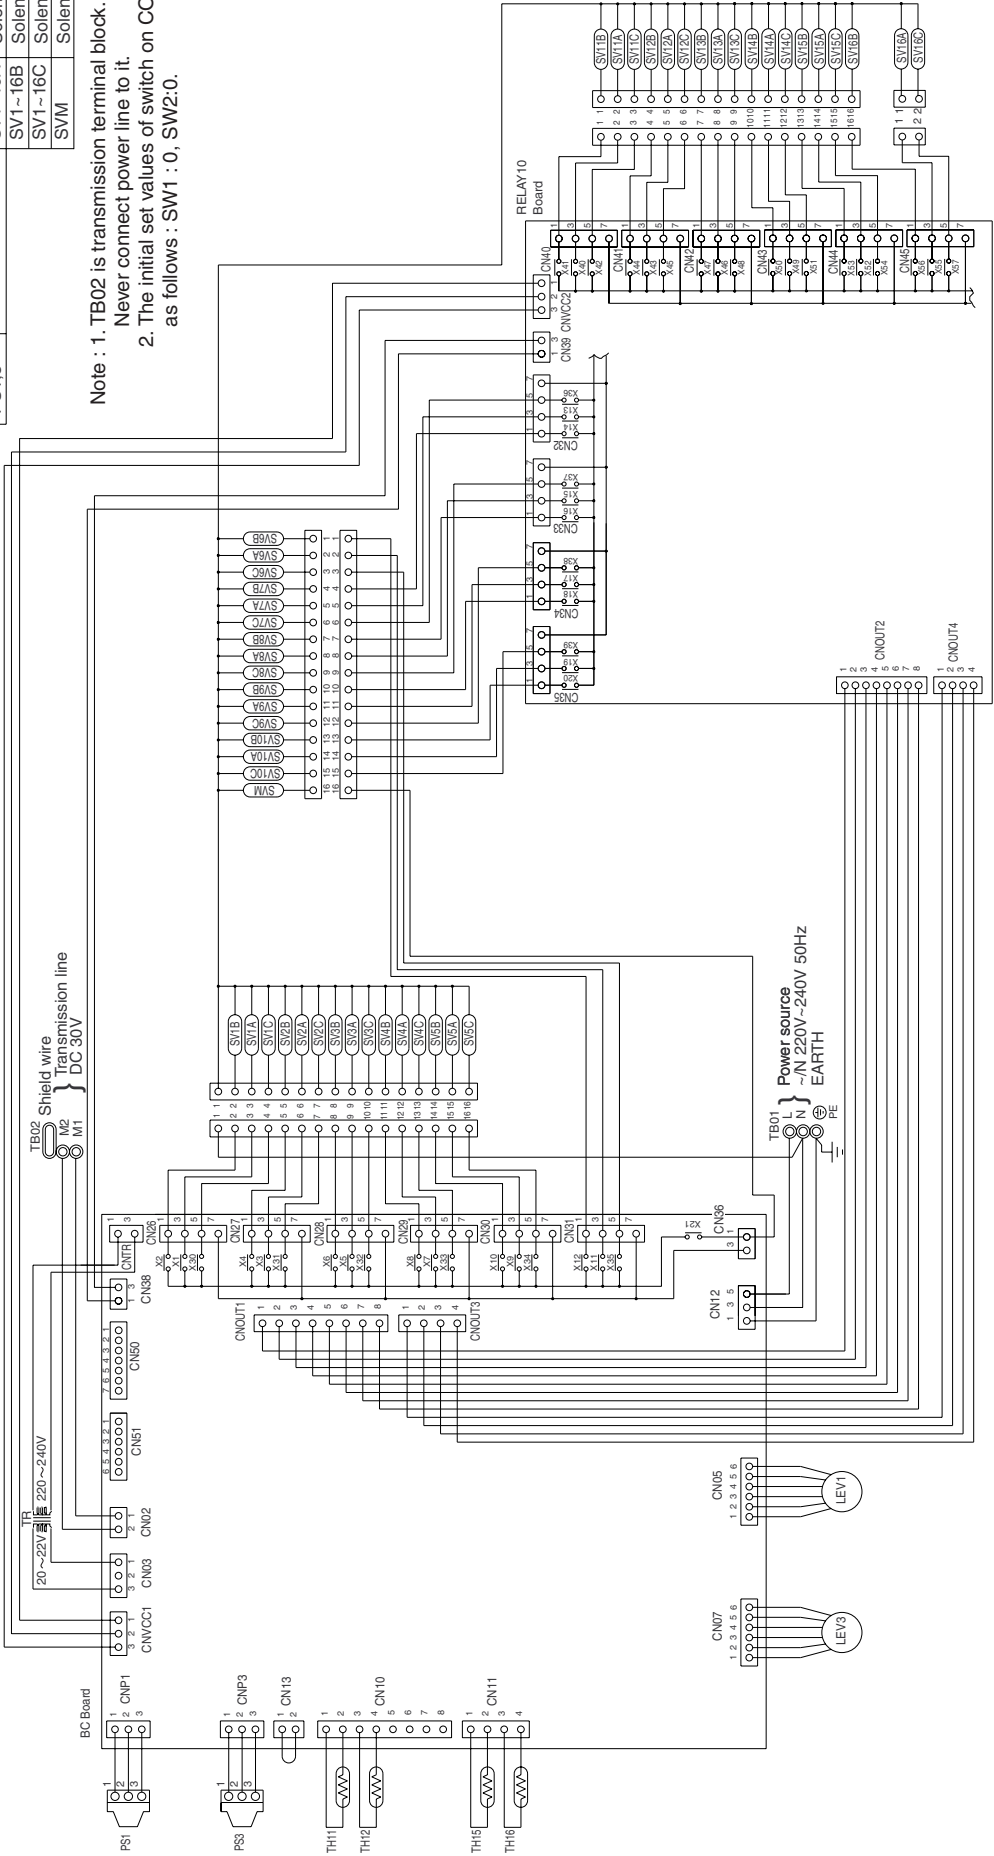

[5] Standard Operation Data

① Cooling operation

Items				Heat source unit		PQRY-P200YMF-B				PQRY-P250YMF-B						
Condition	Power source			V/Hz		380-415V/50Hz				380-415V/50Hz						
	Ambient temp.		Indoor	DB/WB		27.0/19.5				27.0/19.5						
	Circulated water temp. (Intet)			°C		30				30						
	Indoor unit		Quantity		Q'ty		4				4					
			Quantity in operation				4				4					
			Model		—		63	63	50	25	125	40	63	25		
	Piping		Main pipe		m		5				5					
			Branch pipe				5	5	5	5	5	5	5	5		
			Total piping length				25				25					
	Indoor unit fan notch			—		Hi	Hi	Hi	Hi	Hi	Hi	Hi	Hi			
	Refrigerant volume			kg		11.4				12.2						
	Compressor volts / Frequency			V		380		415		380		415				
				V/Hz		270/77		270/77		340/98		340/98				
Heat source unit			A		14.0		12.8		18.8		17.2					
LEV opening	Indoor unit			Pulse		330	460	430	300	410	330	460	300			
	BC controller (1, 3)					2000		240		2000		260				
	Oil return					180				330						
Pressure	High pressure/Low pressure			kg/cm²G (MPa)		22.0/5.3 (2.20/0.52)				21.5/5.0 (2.15/0.50)						
	BC controller liquid/Intermediate					20.9/20.9 (2.09/2.09)				20.4/20.4 (2.04/2.04)						
Sectional temperature	Heat source unit		Discharge (TH1)		°C		101				99.0					
			Accumulator				Inlet		7				7			
							Outlet		10				10			
			Suction (Comp)				12				12					
			CS circuit (TH2)				4.9				4.3					
			Liquid level				Upper (TH4)		30				30			
							Lower (TH3)		23.5				23.5			
			Shell bottom (Comp)				70				78					
	Indoor unit		LEV inlet				26				30					
			Heat exchanger outlet				15				15					
αOC					0.23				0.23							

② Heating operation

Items				Heat source unit		PQRY-P200YMF-B				PQRY-P250YMF-B				
Condition	Power source			V/Hz		380-415V/50Hz				380-415V/50Hz				
	Ambient temp.		Indoor	DB/WB		21.0/—				21.0/—				
	Circulated water temp.			°C		20				20				
	Indoor unit		Quantity		Q'ty		4				4			
			Quantity in operation				4				4			
			Model		—		63	63	50	25	125	40	63	25
	Piping		Main pipe		m		5				5			
			Branch pipe				5	5	5	5	5	5	5	5
			Total piping length				25				25			
	Indoor unit fan notch			—		Hi	Hi	Hi	Hi	Hi	Hi	Hi	Hi	
	Refrigerant volume			kg		11.4				12.2				
	Compressor volts/Frequency			V		380		415		380		415		
				V/Hz		250/69		250/69		330/88		330/88		
	Heat source unit total current			A		13.1		12.0		16.1		14.8		
LEV opening	Indoor unit			Pulse		600	950	750	400	750	600	950	400	
	BC controller (1, 3)					60		600		60		850		
	Oil return					115				115				
Pressure	High pressure/Low pressure			kg/cm²G (MPa)		22.0/5.6 (2.20/0.56)				22.0/5.4 (2.20/0.54)				
	BC controller liquid/Intermediate					21.0/18.0 (2.10/1.80)				21.0/18.0 (2.10/1.80)				
Sectional temperature	Heat source unit	Discharge (TH1)		°C		75				79				
		Accumulator	Inlet			—1				—1				
			Outlet			—4				—2				
		Suction (Comp)				—1				—1				
		CS circuit	(TH2)			7				5				
		Liquid level	Upper (TH4)			28				29				
			Lower (TH3)			5				9				
		Shell bottom (Comp)				55				60				
	Indoor unit	LEV inlet				38				40				
		Heat exchanger outlet				80				85				
	αOC							0.28				0.28		

[6] Function of Dip SW and Rotary SW

(1) Heat source unit

Switch		Function	Function according to switch operation		Switch set timing	
			When off	When on	When off	When on
SWU	1~2	Unit address setting	Set on 51~100 with the dial switch.		Before power is turned on.	
SW1	1~8	For self diagnosis/ operation monitoring	LED monitoring display		During normal operation when power is on.	
	9~10	—	—	—	Should be set on OFF.	
SW2	1	Centralized control switch	Centralized control not connected.	Centralized control connected.	Before power is turned on.	
	2	Deletion of connection information.	Storing of refrigeration system connection information.	Deletion of refrigeration system connection information.	Before power is turned on.	
	3	Deletion of error history.	—	Deletion	During normal operation when power is on.	
	4	Adjustment of refrigerant Volume	Ordinary control	Refrigerant volume adjustment operation.	During normal operation when power is on.	Invalid 2 hours after compressor starts.
	5	—	—	—	—	
	6	—	—	—	—	
	7	Operation ON signal output switching Relay contact output TB8-1,2	The relay closes during compressor operation.	The relay closes during reception of the cooling or the heating operation signal from the controller. (Note: It is output even if the thermostat is OFF (when the compressor is stopped).)	At all times	
	8	Disregard pump interlock trouble.	Normal	Disregard trouble	At all times	
	9	—	—	—	—	
	10	—	—	—	—	
SW3	1	SW3-2 Function valid/invalid	SW3-2 Function invalid	SW3-2 Function valid	During normal operation when power is on.	
	2	Indoor unit test operation	Stop all indoor units.	All indoor units test operation ON.	When SW3-1 is ON after power is turned on.	
	3	CN51-3,5 Output switching	Water heat exchanger freeze prevention signal	Heat source unit abnormal output	At all times	
	4	Freeze prevention operation	Normal	Freeze prevention operation*	At all times	
	5	Target Te (α) at cooling-only	-2°C	-5°C	At all times	
	6	Pump down operation	Invalid	Valid	During Comp stop (only when power changes from OFF → ON)	
	7	Target Tc (High pressure) at heating	50°C	53°C	During normal operation when power is on.	
	8	—	—	—	—	
	9	—	—	—	—	
	10	Models	Model P200	Model P250	When switching on the power.	
SW4	1	SW4-2 function valid/Invalid	Invalid	Valid	During normal operation when power is on.	
	2	Configuration compensation value	Changes as shown below by on → off change 0% → 3% → 6% → 9% → 12% → -6% → -3% → 0%		When SW4-1 is ON.	
	3	—	—	—	—	

Note:

- SWU1~2=00 when shipped from the factory. Other factory settings are indicated by shaded portions.
- If the address is set from 01 to 50, it automatically becomes 100.

* Freeze prevention operation

When the water temp. (TH6) below less 5°C during compressor is stopping, the compressor starts to run with cooling mode to prevent the water freeze.

(2) Indoor unit

DIP SW1, 3

Switch	SW name	Operation by SW		Switch set timing		Remarks
		OFF	ON	OFF	ON	
SW1	1 Room temp. sensor position	Indoor unit inlet	Built in remote controller	At unit stopping (at remote controller OFF)		
	2 Clogged filter detect.	None	Provided			
	3 Filter duration	100h	2500h			
	4 OA intake	Ineffective	Effective			Always ineffective for PKFY-P.VAM
	5 Remote display select.	Fan output display	Thermo. ON signal display			
	6 Humidifier control	At stationary heating	Always at heat			
	7 Heating thermo. OFF airflow	Very low speed	Low speed			
	8 Heating thermo. OFF airflow	SW1-7 setting	Set airflow			
	9 Power failure automatic return	Ineffective	Effective			
	10 Power source start/stop	Ineffective	Effective			
SW3	1 Model selection	Heat pump	Cool. only			
	2 Louver <small>(Cooling capacity saving for PKFY-P.VAM, effective/ineffective)</small>	None	Provided			
	3 Vane	None	Provided			
	4 Vane swing function	None	Provided			Not provided for PKFY-P.VAM Provided for PLFY-P.VGM (ON) setting
	5 Vane horizontal angle	1st setting	2nd setting			
	6 Vane angle set for cooling	Down blow B, C	Horizontal			Always down blow B,C for PKFY-P.VAM Horizontal (ON) setting for PLFY-P.VLMD
	7 —	—	—			
	8 Heating 4deg up	Effective	Ineffective			Ineffective (ON) setting for floor standing

Note 1: The shaded part indicates the setting at factory shipment. (For the SW not being shaded, refer to the table below.)

Model Switch		PLFY-P			PEFY-P		PDFY-P	PFFY-P	PCFY-P	PKFY-P	
		VBM	VLMD	VKM	VML	VMH	VM	VLRM, VLEM	VGM	VAM	VGM
SW1	3	OFF	ON		OFF	ON	ON	OFF	ON	OFF	
	6	OFF	ON						OFF		
	7	OFF			ON		OFF				
SW3	3	ON			OFF				ON		
	4	ON	OFF	ON	OFF				ON	OFF	ON
	6	OFF	ON	OFF							
	8	OFF						ON	OFF		

Note 2: The Dip SW setting is only effective during unit stopping (remote controller OFF) for SW1, 2, 3 and 4 commonly and the power source is not required to reset.)

3: When both SW1-7 and SW1-8 are being set to ON, the fan stops at the heating thermostat of OFF.

Setting of DIP SW2


Model	P20	P25	P32	P40	P50	P63
Capacity (model name) code	4	5	6	8	10	13
SW2 setting	ON OFF	ON OFF	ON OFF	ON OFF	ON OFF	ON OFF

Model	P71	P80	P100	P125	P140
Capacity (model name) code	14	16	20	25	28
SW2 setting	ON OFF	ON OFF	ON OFF	ON OFF	ON OFF

Setting of DIP SW4

Model	Circuit board used	SW4			
		1	2	3	4
PMFY-P-DBM	Phase control	ON	OFF	ON	OFF
PLFY-P-VLMD		—	—	—	—
PDFY-P20 ~ 80VM		ON	OFF	ON	OFF
PLFY-P40 ~ 63VKM		OFF	OFF	OFF	ON
PLFY-P80 ~ 125VKM		ON	OFF	OFF	ON
PCFY-P-VGM		OFF	ON	OFF	ON
PKFY-P-VGM		OFF	OFF	ON	ON
PKFY-P-VAM		—	—	—	—
PFFY-P-VLEM, P-VLRM	Relay selection	OFF	OFF	OFF	—
PEFY-P20 ~ 32VML		ON	ON	ON	—
PEFY-P40 ~ 140VMH		OFF	OFF	OFF	—
PDFY-P100-125VM		OFF	OFF	ON	—

Setting of DIP SW5



Switch		Function	Operation by switch			Switch set timing																	
SWA	1~3	Ceiling height setting	(PLFY-P-VKM)	(PCFY-P-VGM)	(PDFY-P-VM)	Always after powering																	
			<div><div>3</div><div>2</div><div>1</div><div></div></div> <div>*The ceiling height is changed by SWB setting.</div>	<div><div>3</div><div>2</div><div>1</div><div></div></div> <table><tr><td></td><td>Ceiling height</td></tr><tr><td>3</td><td>3.5m</td></tr><tr><td>2</td><td>2.8m</td></tr><tr><td>1</td><td>2.3m</td></tr></table> <div><div>3</div><div>2</div><div>1</div><div></div></div>			Ceiling height	3	3.5m	2	2.8m	1	2.3m										
	Ceiling height																						
3	3.5m																						
2	2.8m																						
1	2.3m																						
SWA	1~3	For options	(PLFY-P-VLMD) <div><div>3</div><div>2</div><div>1</div><div></div></div> <div>* As this switch is used by interlocking with SWC, refer to the item of SWC for detail.</div>			Always after powering																	
SWB	1~3	Setting of air outlet opening	(PLFY-P-VKM) <div><div>2-way</div><div>3-way</div><div>4-way</div><div></div></div>	<table><tr><td>SWA \ SWB</td><td>1</td><td>2</td><td>3</td></tr><tr><td>2-way</td><td>3.5m</td><td>3.8m</td><td>3.8m</td></tr><tr><td>3-way</td><td>3.0m</td><td>3.3m</td><td>3.5m</td></tr><tr><td>4-way</td><td>2.7m</td><td>3.0m</td><td>3.5m</td></tr></table>			SWA \ SWB	1	2	3	2-way	3.5m	3.8m	3.8m	3-way	3.0m	3.3m	3.5m	4-way	2.7m	3.0m	3.5m	Always after powering
SWA \ SWB	1	2	3																				
2-way	3.5m	3.8m	3.8m																				
3-way	3.0m	3.3m	3.5m																				
4-way	2.7m	3.0m	3.5m																				
SWC	1~2	Airflow control	(PLFY-P-VKM, PCFY-P-VGM, PKFY-P-VGM) <div><div>Option</div><div>Standard</div><div></div></div> <div>* Set to the option to install the high efficiency filter</div>			Always after powering																	
			(PLFY-P-VLMD) <div><div>3</div><div>2</div><div>1</div><div></div></div> <div>SWA</div> <div><div>Option</div><div>Standard</div><div></div></div> <div>SWC</div>																				
			(PDFY-P-VM) <div><div>3</div><div>2</div><div>1</div><div></div></div> <div>SWA</div> <div><div>Option</div><div>Standard</div><div></div></div> <div>SWC</div>																				

(3) BC controller unit

DIP SW4

Switch	Function	Function according to switch operation	
		When off	When on
SW4	1	Models	V-E type
	2~8	—	—

*If the EPROM for the BC controller is WF30334, the controller is exclusively V-D type.

[7] External Input/Output Specifications

(1) Output

① Operation ON signal

Terminal No.	TB8-1, 2
Output	Relay contacts output Rated voltage: L1 - N: 220 ~ 240 V Rated load: 1 A
Operation	<ul style="list-style-type: none">When DIP switch 2-7 is OFF The relay closes during compressor operation.When DIP switch 2-7 is ON The relay closes during reception of the cooling or the heating operation signal from the controller. (Note: It is output even if the thermostat is OFF (when the compressor is stopped).)

② COMP ON/OFF signal

Connector No.	CN51-3, 4 Connector : B5B-XH-A (JST)
Output	DC 12 V
Operation	DC 12 V is output during compressor operation.

③ Water freeze / trouble signal

Connector No.	CN51-3, 5 Connector : B5B-XH-A (JST)
Output	DC 12 V
Operation	<ul style="list-style-type: none">When DIP switch 3-3 is OFF If the water temperature (TH 6) drops below 5°C while the unit is stopped, DC 12 V is output.When DIP switch 3-3 is ON DC 12 V is output when the heat source unit is stopped abnormally.

(2) Input

① Pump Interlock

Terminal No.	TB8-3, 4
Input	Level signal
Operation	If the circuit between TB8-3 and TB8-4 is open, compressor operation is prohibited.

② Demand

Connector No.	CN3D-1, 3 Connector : B3B-EH (JST)
Input	Level signal
Operation	If the circuit between CN3D-1 and CN3D-3 is opened, compressor operation is prohibited.

3 TEST RUN




[1] Before Test Run

(1) Check points before test run

1	Neither refrigerant leak nor loose power source/ transmission lines should be found.
2	Confirm that the resistance between the power source terminal block and the ground exceeds $2M\Omega$ by measuring it with a DC500V megger. Do not run if it is lower than $2M\Omega$. Note) Never apply the megger to the MAIN board. If applied, the MAIN board will be broken.
3	Confirm that the Ball valve at both gas and liquid sides is being fully opened. Note) Certainly close the cap.
4	Be sure that the crankcase heater has been powered by turning the main power source on at least 12 hours before starting the test run. The shorter powering time causes compressor trouble.

(2) Caution at inverter check


Because the inverter power portion in heat source unit electrical part box have a lot of high voltage portion, be sure to follow the instructions shown below.

1	During energizing power source, never touch inverter power portion because high voltage (approx. 580V) is applied to inverter power portion.	
2	When checking,	
		Shut off main power source, and check it with tester, etc.
		Allow 10 minutes after shutting off main power source.
		Open the MAIN board mounting panel, and check whether voltage of both ends of electrolytic capacitor is 20V or less.

(3) Check points for test run when mounting options

Built-in optional parts	Content of test run	Check point	Result
Mounting of drain water lifting-up mechanism	1 Release connector of pump circuit, check error detection by pouring water into drain pan water inlet.	Local remote controller displays code No. "2503", and the mechanism stops.	
		No overflow from drain pan.	
	2 After that, connect connector of circuit.	Drain water comes out by operations of drain pump.	
	3 Check pump operations and drainage status in cooling (test run) mode.	Sound of pump operations is heard, and drain water comes out.	
Mounting of permeable film humidifier	Check humidifier operations and water supply status in heating (test run) mode.	No water leak from connecting portions of each water piping.	
		Water is supplied to water supply tank, and float switch is operating.	


(4) Attention for mounting drain water lifting-up mechanism

Work	Content of test run	Check point	Result
Disassembling and assembling of drain water lifting-up mechanism	1 Lead wire from control box not damaged.		
	2 Rubber cap properly inserted to drain water outlet of drain pan?		
	3 Insulation pipe of gas and liquid pipes dealt with as shown in the right figure?		
	4 Drain pan and piping cover mounted without gap?		
	5 Drain pan hooked on cut projection of the mechanism?		
Mounting of float switch	Float switch installed without contacting with drain pan?	1 Float switch moves smoothly.	
		2 Float switch is mounted on mounting board straightly without deformation.	
		3 Float switch does not contact with copper pipe.	
Electric wiring	1 No mistakes in wiring?	Wiring procedure is exactly followed.	
	2 Connectors connected surely and tightly?	Connector portion is tightly hooked.	
	3 No tension on lead wire when sliding control box?		


(5) Check points for system structure

ex. PQR-Y-P200YMF-B

Check points from installation work to test run.

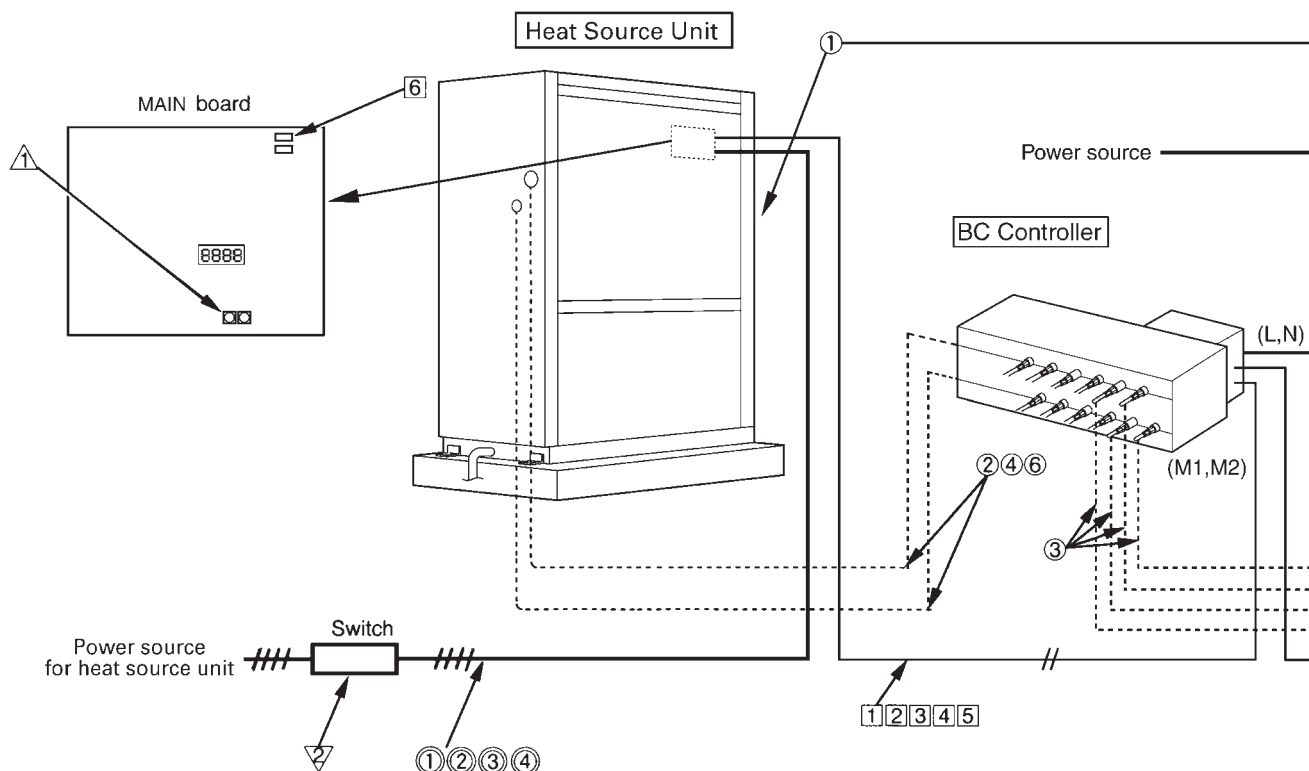

Classification	Portion	Check item	Trouble
Installation and piping	①	Instruction for selecting combination of heat source unit, and indoor unit followed? (Maximum number of indoor units which can be connected, connecting model name, and total capacity.)	Not operate.
	②	Follow limitation of refrigerant piping length? For example, 70m or less (total length : 220m) at the farthest.	Not cool (at cooling).
	③	Connecting piping size of branch piping correct?	Not heat (at heating).
	④	Refrigerant piping diameter correct?	
	⑤	Refrigerant leak generated at connection?	Not cool, not heat, error stop.
	⑥	Insulation work for piping properly done?	Condensation drip in piping.
	⑦	Specified amount of refrigerant replenished?	Not cool, not heat, error stop.
	⑧	Pitch and insulation work for drain piping properly done?	Water leak, condensation drip in drain piping.
Power source wiring	①	Specified switch capacity and wiring diameter of main power source used?	Error stop, not operate.
	②	Proper grounding work done on heat source unit?	Electric shock.
	③	The phases of the L line (L1, L2, L3) correct?	Error stop, not operate.
	④	L line and N line connected correct?	The some electric pars should be damaged.

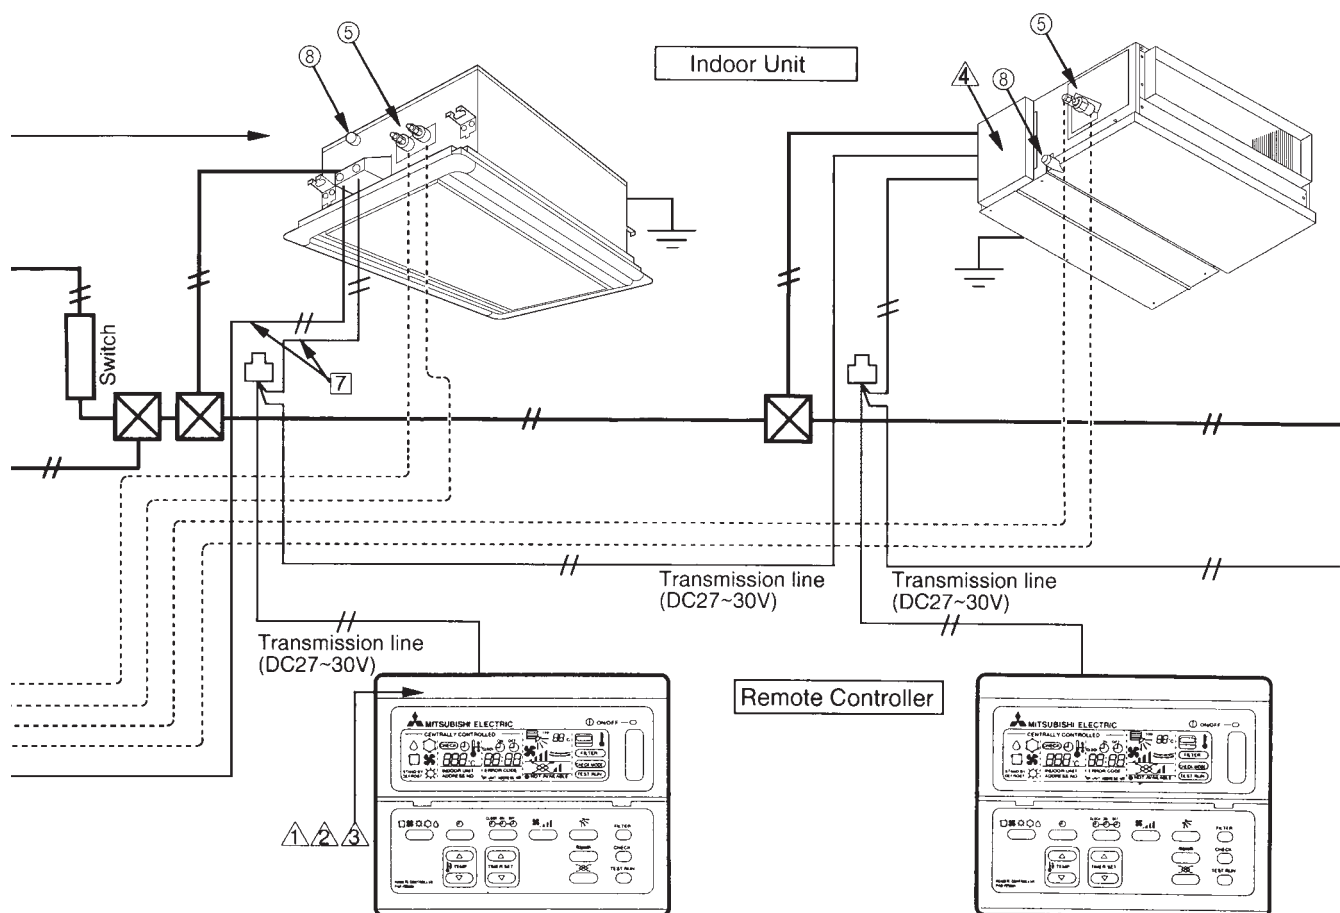

Classification	Portion	Check item	Trouble
Transmission line	①	Limitation of transmission line length followed? For example, 200m or less (total length : 500m) at the farthest.	Erroneous operation, error stop.
	②	1.25mm ² or more transmission line used? (Remote controller 10m or less 0.75mm ²)	Erroneous operation, error stop.
	③	2-core cable used for transmission line?	Error stop in case multiple-core cable is used.
	④	Transmission line apart from power source line by 5cm or more?	Erroneous operation, error stop.
	⑤	One refrigerant system per transmission line?	Not operate.
	⑥	The short circuit connector is changed from CN41 to CN40 on the MAIN board when the system is centralized control? (Just one heat source unit. Not all heat source units.)	Not operate.
	⑦	No connection trouble in transmission line?	Error stop or not operate.
System set	①	Address setting properly done? (Remote controller, indoor unit and heat source unit.)	Error stop or not operate.
	②	Setting of address No. done when shutting off power source?	Can not be properly set with power source turned on.
	③	Address numbers not duplicated?	Not operate.
	④	Turned on SW3-8 on indoor unit circuit board when mounting room thermistor sensor?	Set temperature not obtained at heating operations (Thermostat stop is difficult)
Before starting	①	Refrigerant piping ball valve (Liquid pressure pipe, gas pressure pipe) opened?	Error stop.
	②	Turn on power source 12 hours before starting operations?	Error stop, compressor trouble.

[2] Address setting

(1) Switch operation





In order to constitute CITY MULTI in a complete system, switch operation for setting the unit address No. and connection No. is required.

- ① Unit address No. group No. and connection No.

The unit address No. is determined by the address setting switch of the heat source unit, indoor unit and remote controller.

- ② Caution for switch operations

Rotary switch		
Connection No. setting	Unit address No. setting	

1	Be sure to shut off power source before switch setting. If operated with power source on, switch can not operate properly.														
2	<div>Address switch shall follow decimal system with 2 digits. Set 000 ~ 250</div> <div><div><div>Heat source unit Indoor unit</div><div><div>10 1</div></div></div><div><div>Remotecontroller</div><div><div>10 1</div></div></div><div><table><tr><td>Indoor unit</td><td>01~50</td></tr><tr><td>Heat source unit</td><td>51~99,100</td></tr><tr><td>BC controller</td><td>51~99,100</td></tr><tr><td>Remote controller (Main)</td><td>101~150</td></tr><tr><td>Pair remote controller (Sub)</td><td>151~199, 200</td></tr><tr><td>MJ-103</td><td>000, 201~250</td></tr></table></div></div>			Indoor unit	01~50	Heat source unit	51~99,100	BC controller	51~99,100	Remote controller (Main)	101~150	Pair remote controller (Sub)	151~199, 200	MJ-103	000, 201~250
Indoor unit	01~50														
Heat source unit	51~99,100														
BC controller	51~99,100														
Remote controller (Main)	101~150														
Pair remote controller (Sub)	151~199, 200														
MJ-103	000, 201~250														
3	No units with identical unit address shall exist in one system. If set erroneously, system can not operate.														

(2) Address setting and switch operations

- ① In case of system with a single system

(In case higher rank controller such as remote controller for centralized control is not connected)

Unit	Address setting	Example	Note
Indoor unit	01~50	<p>10 1</p>	
Heat source unit	51~99, 100	<p>10 1</p>	<p>The smallest address of indoor unit in same refrigerant system + 50</p> <p>*If the address is to be 100, use "50."</p>
BC controller	51~99, 100	<p>10 1</p>	<p>The address of Heat source unit + 1</p> <p>*If the address is to be 100, use "50."</p>
Remote controller	Remote controller (Main)	<p>101~150</p> <p>Fixed</p> <p>10 1</p>	<p>The smallest address of indoor unit in the group + 100</p> <p>*The place of "100" is fixed to "1"</p>
	Remote controller (Sub)	<p>151~199, 200</p> <p>Fixed</p> <p>10 1</p>	<p>The address of main remote controller + 50</p> <p>*The address automatically becomes "200" if it is set as "00"</p>
	MJ-103	<p>000, 201~250</p> <p>100 10 1</p>	
Fresh Master	1~50	<p>10 1</p>	<ul style="list-style-type: none"> The Fresh Master system allows you to select operations using the remote controller or using the indoor unit. Use the dip switch (SW3-1) to make this selection. See the section "Fresh Master operation/Remote controller switching" for settings. For operations using the remote controller, use the same setting method as for the indoor unit. For operations using the indoor unit, settings should be within the range 01 – 50, without respect to the group.
Lossnay unit	1~50	<p>10 1</p>	Set within the range 01 – 50 with no duplications.


② Branch number switch (Indoor Units and Fresh Master)

Match the indoor unit's refrigerant pipe with the BC controller's end connection number.

When combining branches, choose the smallest connection number in the series.

The indoor unit capacity limit for connecting to a branch is 80. Max. 3sets for 1 connection.

When selecting connection number 16, choose 0 as the setting for the branch number switch.

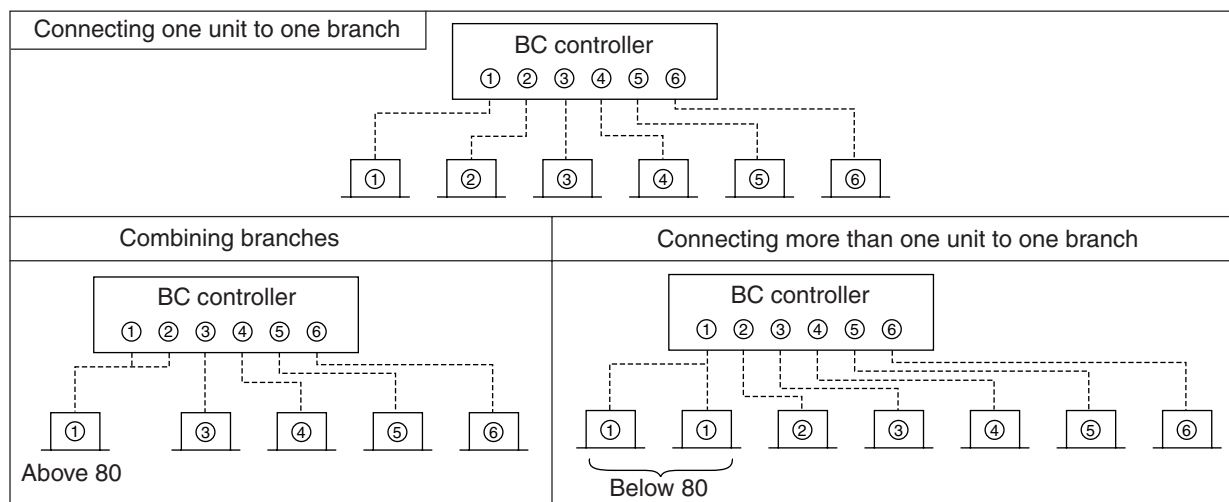

③ In the case of group operations of indoor units of different refrigerant system



(Including the case of connecting with higher rank controller such as remote controller for centralized controller).


Group setting shall be done with remote controller. (When the centralized remote controller is connected, the setting should be done with the centralized remote controller.) Address setting can be done on each unit freely.

Regarding transmission wiring, provide 2-wire jumper system (Centralized system transmission line) to outdoor units to be connected to indoor unit in the same group, and mount short circuit connector on CN41 to CN40 for replacement for one of the outdoor units. (However, when the higher rank controller like that for centralized controller is connected, do not replace the short circuit connector to CN40.)













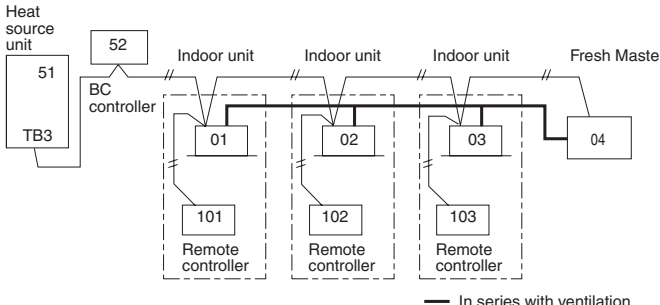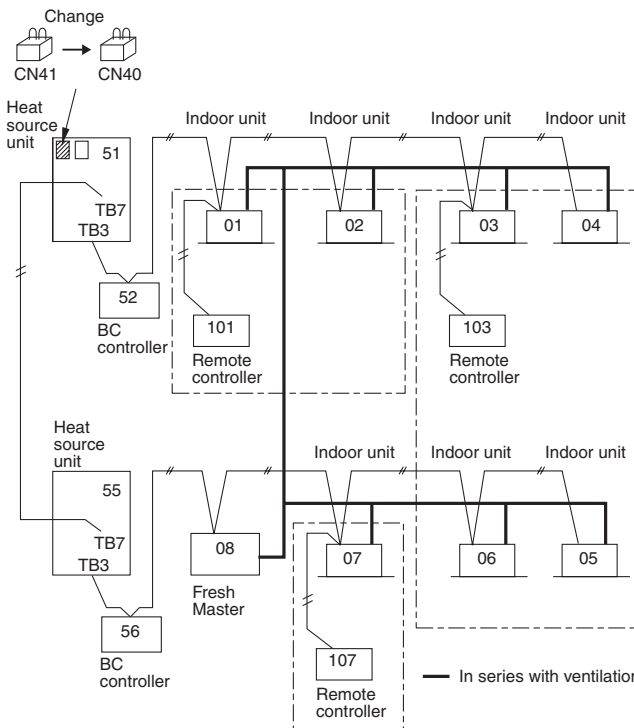


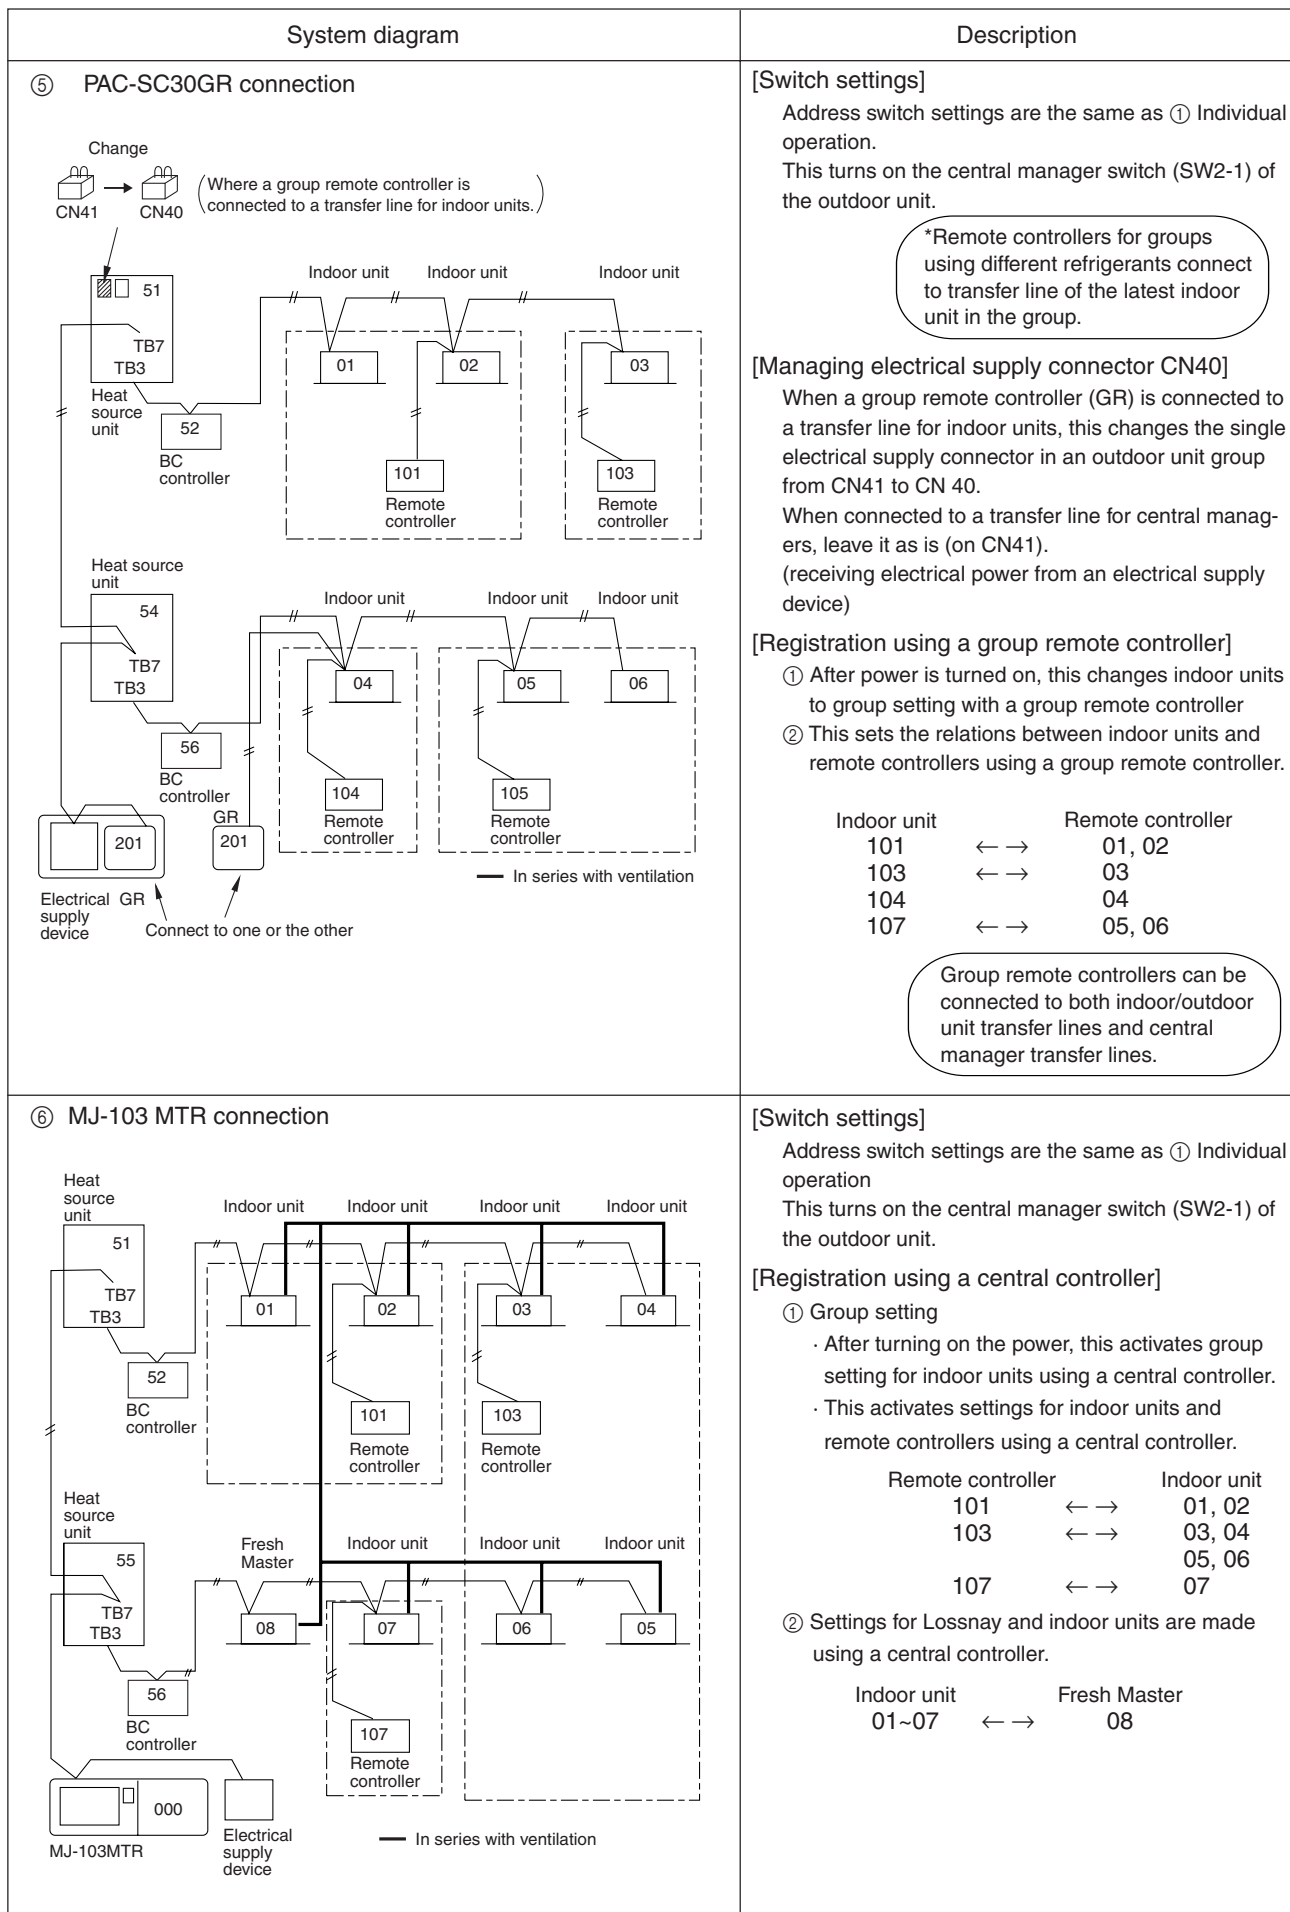
(3) Examples of switch settings

System diagram	Description																					
<p>① Individual operation</p>	<p>[Switch settings]</p> <p>(1) Address switch</p> <table><tr><th>Unit</th><th>Range</th><th>Setting</th></tr><tr><td>Indoor unit</td><td>01~50</td><td>—</td></tr><tr><td>Remote controller</td><td>101~150 Note 1</td><td>Indoor unit setting + 100</td></tr><tr><td>Heat source unit</td><td>51~100 Note 2</td><td>Smallest address among indoor units + 50</td></tr><tr><td>BC controller</td><td>51~100 Note 2</td><td>Heat source unit + 1</td></tr></table> <p>Note 1. For remote controllers, it is not necessary to set digits in the hundreds column.</p> <p>Note 2. When setting heat source unit address or BC controller address to 100, set the address setting switch to 50.</p> <p>(2) Branch number switch</p> <p>Match the indoor unit's refrigerant pipe with the BC controller's end connection number.</p>	Unit	Range	Setting	Indoor unit	01~50	—	Remote controller	101~150 Note 1	Indoor unit setting + 100	Heat source unit	51~100 Note 2	Smallest address among indoor units + 50	BC controller	51~100 Note 2	Heat source unit + 1						
Unit	Range	Setting																				
Indoor unit	01~50	—																				
Remote controller	101~150 Note 1	Indoor unit setting + 100																				
Heat source unit	51~100 Note 2	Smallest address among indoor units + 50																				
BC controller	51~100 Note 2	Heat source unit + 1																				
<p>② Group operation</p>	<p>[Switch settings]</p> <p>(1) Address switch</p> <table><tr><th>Unit</th><th>Range</th><th>Setting</th></tr><tr><td>IC (Main)</td><td>01~50</td><td>Smallest address among several indoor units that form a single group.</td></tr><tr><td>IC (Sub)</td><td>01~50</td><td>Address other than the IC (Main) among several indoor units that form a single group. Use numerical order starting after the IC (Main).</td></tr><tr><td>Remote controller (Main)</td><td>101~150 Note 1</td><td>Address of IC (Main) within the same group + 100</td></tr><tr><td>Remote controller (Sub)</td><td>151~200 Note 1</td><td>Address of IC (Main) within the same group + 150</td></tr><tr><td>Heat source unit</td><td>51~100 Note 2</td><td>Smallest address among indoor units + 50</td></tr><tr><td>BC controller</td><td>51~100 Note 2</td><td>Heat source unit + 1</td></tr></table> <p>Notes 1 and 2 : same as above.</p> <p>(2) Branch number switch</p> <p>Same as ① Individual operation.</p>	Unit	Range	Setting	IC (Main)	01~50	Smallest address among several indoor units that form a single group.	IC (Sub)	01~50	Address other than the IC (Main) among several indoor units that form a single group. Use numerical order starting after the IC (Main).	Remote controller (Main)	101~150 Note 1	Address of IC (Main) within the same group + 100	Remote controller (Sub)	151~200 Note 1	Address of IC (Main) within the same group + 150	Heat source unit	51~100 Note 2	Smallest address among indoor units + 50	BC controller	51~100 Note 2	Heat source unit + 1
Unit	Range	Setting																				
IC (Main)	01~50	Smallest address among several indoor units that form a single group.																				
IC (Sub)	01~50	Address other than the IC (Main) among several indoor units that form a single group. Use numerical order starting after the IC (Main).																				
Remote controller (Main)	101~150 Note 1	Address of IC (Main) within the same group + 100																				
Remote controller (Sub)	151~200 Note 1	Address of IC (Main) within the same group + 150																				
Heat source unit	51~100 Note 2	Smallest address among indoor units + 50																				
BC controller	51~100 Note 2	Heat source unit + 1																				

System diagram	Description																											
<p>③ System for operating with Fresh Master (Lossnay)</p> 	<p>[Switch settings]</p> <p>This is the same as ① Individual operation. However, keep the Fresh Master address within the 1 ~50 range to avoid duplication with other indoor units.</p> <p>[Registering with a remote controller]</p> <p>Registers operation of Fresh Master and indoor units using the remote controller.</p> <table><tr><td>Indoor unit</td><td></td><td>Fresh Master</td></tr><tr><td>01, 02, 03</td><td>← →</td><td>04</td></tr></table>	Indoor unit		Fresh Master	01, 02, 03	← →	04																					
Indoor unit		Fresh Master																										
01, 02, 03	← →	04																										
<p>④ System for operating multiple-refrigerant + Fresh Master (Lossnay)</p> 	<p>[Switch settings]</p> <p>Same as ① Individual operation.</p> <div><p>*Remote controllers for groups using different refrigerants connect to transfer line of the latest indoor unit in the group.</p></div> <p>[Managing electrical supply connector CN40]</p> <p>Changes the single electrical supply connector of an outdoor unit group from CN41 to CN40.</p> <p>[Registration using a remote controller]</p> <p>① Group setting</p> <p>After power is turned on, this changes indoor units and network remote controllers to group setting.</p> <table><tr><td>Remote controller</td><td></td><td>Indoor unit</td></tr><tr><td>101</td><td>← →</td><td>01, 02</td></tr><tr><td>103</td><td>← →</td><td>03, 04</td></tr><tr><td></td><td></td><td>05, 06</td></tr><tr><td>107</td><td>← →</td><td>07</td></tr></table> <p>② Operation registration</p> <p>After power is turned on, this activates operation registration for Fresh Master and indoor units using remote controllers.</p> <table><tr><td>Indoor unit</td><td></td><td>Fresh Master</td></tr><tr><td>01, 02, 03</td><td></td><td></td></tr><tr><td>04, 05, 06</td><td>← →</td><td>08</td></tr><tr><td>07</td><td></td><td></td></tr></table>	Remote controller		Indoor unit	101	← →	01, 02	103	← →	03, 04			05, 06	107	← →	07	Indoor unit		Fresh Master	01, 02, 03			04, 05, 06	← →	08	07		
Remote controller		Indoor unit																										
101	← →	01, 02																										
103	← →	03, 04																										
		05, 06																										
107	← →	07																										
Indoor unit		Fresh Master																										
01, 02, 03																												
04, 05, 06	← →	08																										
07																												




[3] Test Run Method

	Operation procedure
①	Turn on universal power supply at least 12 hours before getting started → Displaying “HO” on display panel for about two minutes
②	Press TEST RUN button twice → Displaying “TEST RUN” on display panel
③	Press      selection button → Make sure that air is blowing out
④	Press      select button to change from cooling to heating operation, and vice versa → Make sure that warm or cold air is blowing out
⑤	Press  adjust button → Make sure that air blow is changed
⑥	Press  or  button to change wind → Make sure that horizontal or downward blow is adjustable.
⑦	Make sure that indoor unit fans operate normally
⑧	Make sure that interlocking devices such as ventilator operate normally if any
⑨	Press ON/OFF button to cancel test run → Stop operation
<p>Note 1: If check code is displayed on remote controller or remote controller does not operate normally.</p> <p>2: Test run automatically stops operating after two hours by activation of timer set to two hours.</p> <p>3: During test run, test run remaining time is displayed on time display section.</p> <p>4: During test run, temperature of liquid pipe in indoor unit is displayed on remote controller room temperature display section.</p> <p>5: When pressing  adjust button, depending on the model, “NOT AVAILABLE” may be displayed on remote controller. However, it is not a malfunction.</p> <p>6: When pressing  or  button, depending on the model, “NOT AVAILABLE” may be displayed on remote controller. However, it is not a malfunction.</p>	

4 GROUPING REGISTRATION OF INDOOR UNITS WITH REMOTE CONTROLLER

(1) Switch function

- The switch operation to register with the remote controller is shown below:

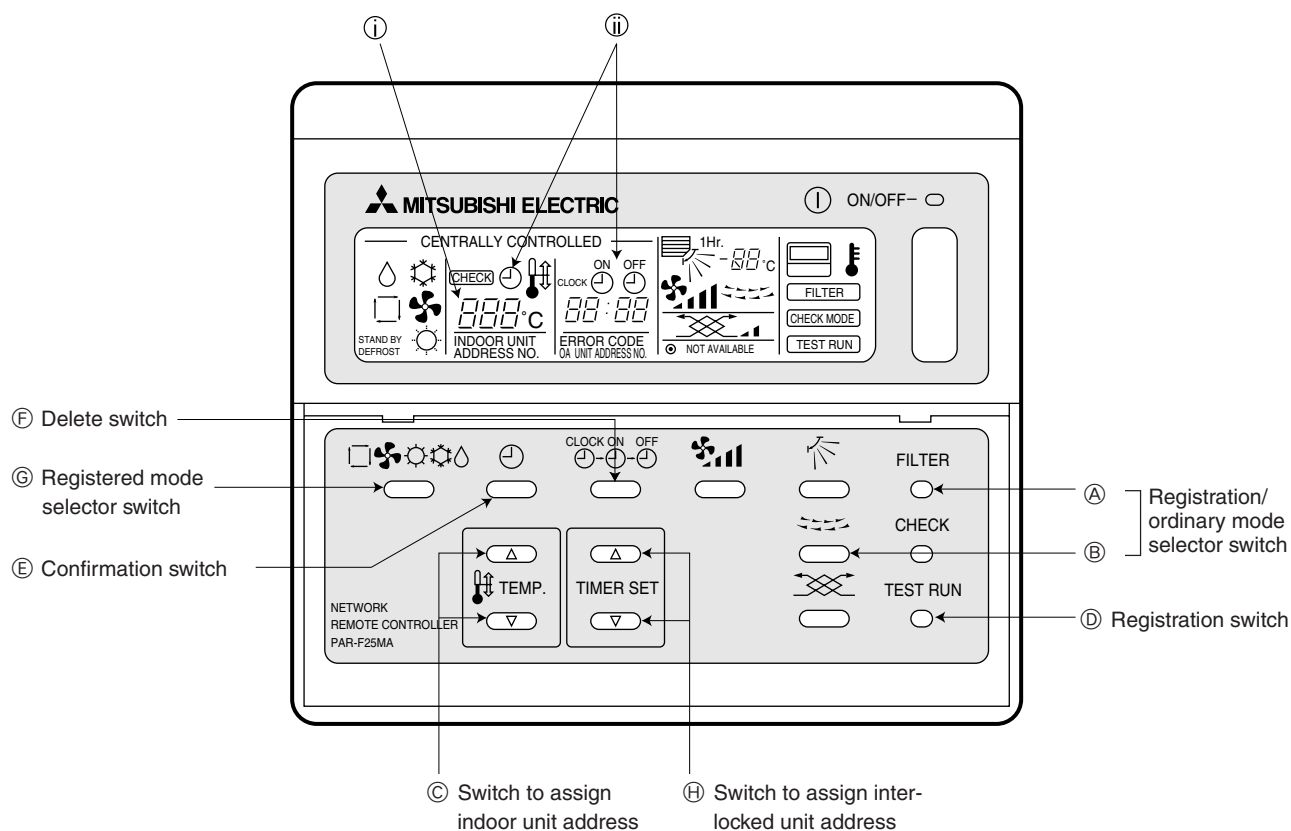

Name	Symbol of switch	Name of actual switch	Description
Registration/ordinary mode selection switch	Ⓐ + Ⓑ	(FILTER) +	This switch selects the ordinary mode or registered mode (ordinary mode represents that to operate indoor units). * To select the registered mode, press the (FILTER) + switch continuously for over 2 seconds under stopping state. [Note] The registered mode can not be obtained for a while after powering. Pressing the (FILTER) + switch displays "CENTRALLY CONTROLLED".
Switch to assign indoor unit address	Ⓒ	▲ ▼ of TEMP	This switch assigns the unit address for "INDOOR UNIT ADDRESS NO."
Registration switch	Ⓓ	(TEST RUN)	This switch is used for group/interlocked registration.
Confirmation switch	Ⓔ		This switch is used to retrieve/identify the content of group and interlocked (connection information) registered.
Delete switch	Ⓕ	CLOCK ON OFF	This switch is used to retrieve/identify the content of group and interlocked (connection information) registered.
Registered mode selector switch	Ⓖ		This switch selects the case to register indoor units as group (group setting mode) or that as interlocked (interlocked setting mode). *The unit address is shown at one spot ① for the group setting mode while at two spots ② for the interlocked setting mode.
Switch to assign interlocked unit address	Ⓗ	▲ ▼ of TIMER SET	This switch assigns the unit address of "OA UNIT ADDRESS NO."

(2) Attribute display of unit

- At the group registration and the confirmation/deletion of registration/connection information, the type (attribute) of the unit is displayed with two English characters.

Display	Type (Attribute) of unit/controller
IL	Indoor unit connectable to remote controller
DL	Heat source unit
RL	Local remote controller
SL	System controller (MJ)

[Description of registration/deletion/retrieval]

- The items of operation to be performed by the remote controller are given below. Please see the relating paragraph for detail.

① Group registration of indoor unit

- The group of the indoor units and operating remote controller is registered.
- It is usually used for the group operation of indoor units with different refrigerant system.

② Retrieval/identification of group registration information of indoor units

- The address of the registered indoor units in group is retrieved (identified).

③ Retrieval/identification of registration information

- The connection information of any unit (indoor/heat source units, remote controller or the like) is retrieved (identified).

④ Deletion of group registration information of indoor units

- The registration of the indoor units under group registration is released (deleted).

⑤ Deletion of the address not existing

- This operation is to be conducted when "6607" error (No ACK error) is displayed on the remote controller caused by the miss setting at test run, or due to the old memory remained at the alteration/modification of the group composition.

Caution:

When MELANS (MJ-103MTRA for example) is being connected, do not conduct the group/pair registration using the remote controller. The group/pair registration should be conducted by MELANS. (For detail, refer to the instruction exclusively prepared for MELANS.)


(3) Group registration of indoor unit

1) Registration method

- Group registration of indoor unit ①
The indoor unit to be controlled by a remote controller is registered on the remote controller.

[Registration procedure]

- ① With the remote controller under stopping or at the display of "HO", continuously press the **(FILTER)** + **↔** switch (A + B) at the same time for 2 seconds to change to the registration mode. (See the figure below.)
- ② Assign the indoor unit address to "INDOOR UNIT ADDRESS NO." by operating the **▲** **▼** (Room temperature adjustment) (C).
Then press the **(TEST RUN)** switch (D) to register. In the figure below, the "INDOOR UNIT ADDRESS NO." is being set to 001.
- ③ After completing the registration, press the **(FILTER)** + **↔** switch (A + B) at the same time for 2 seconds to change to the original ordinary mode (with the remote controller under stopping).

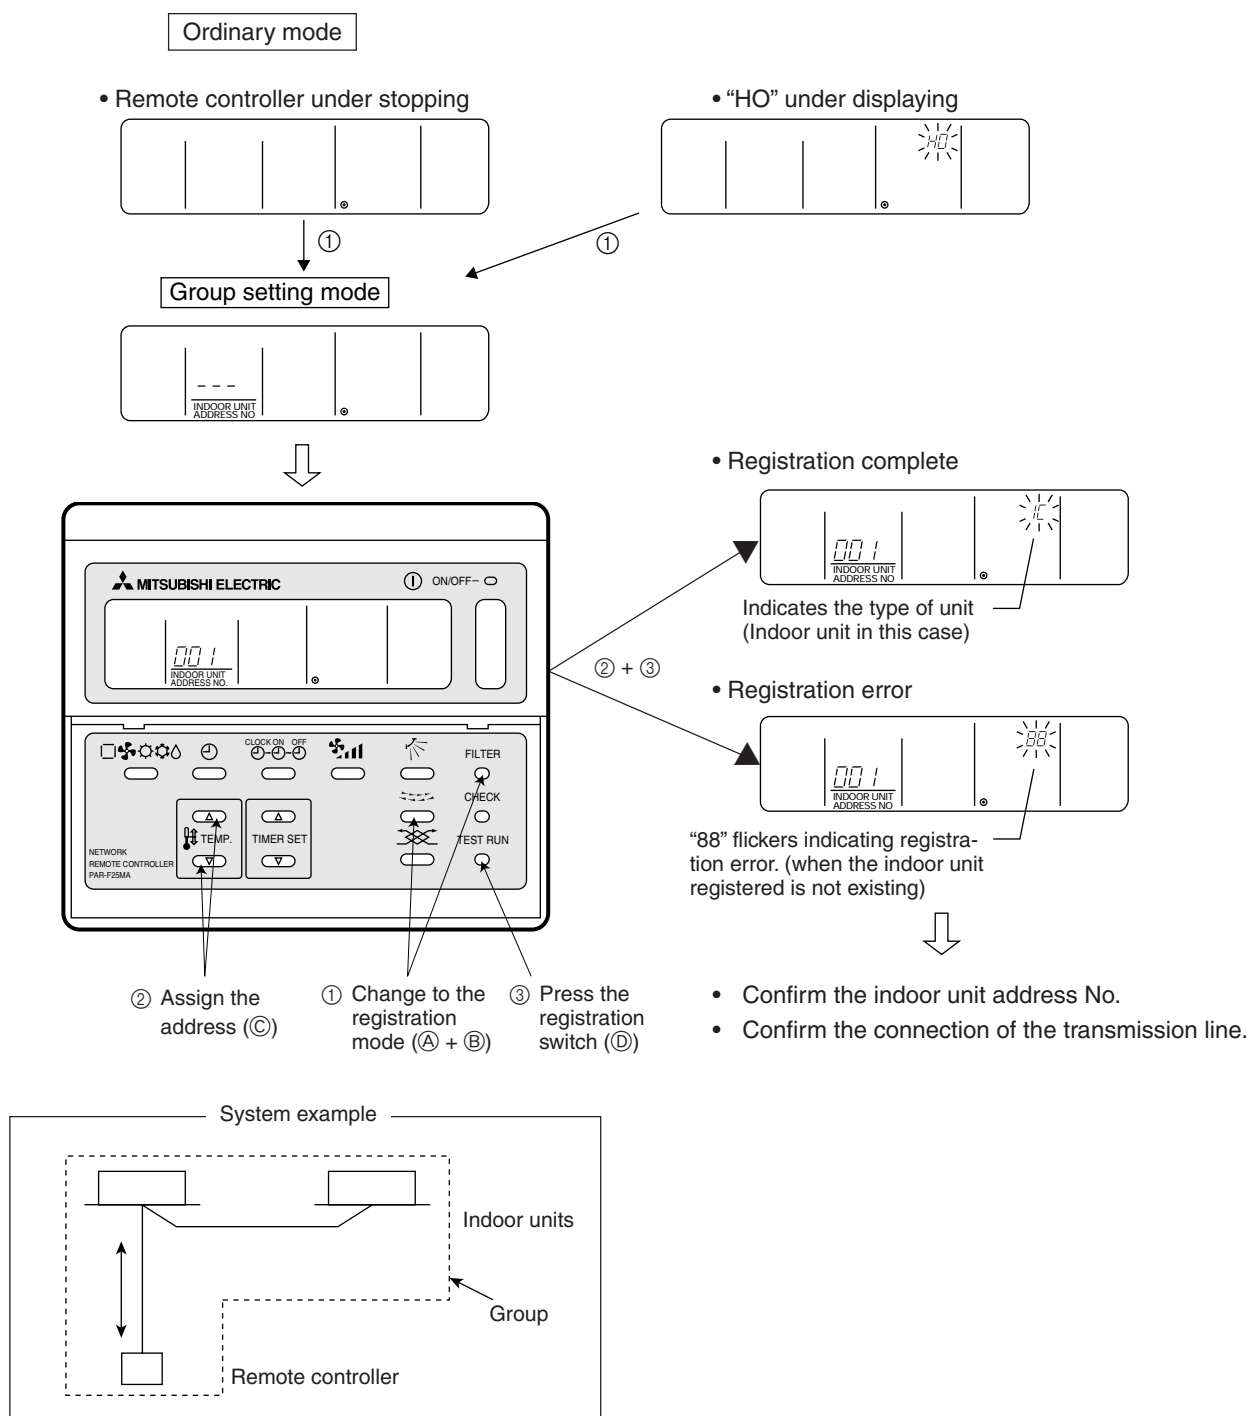






2) Method of retrieval/confirmation

- Retrieval/confirmation of group registration information on indoor unit [2]

The address of the indoor unit being registered on the remote controller is displayed.

[Operation procedure]



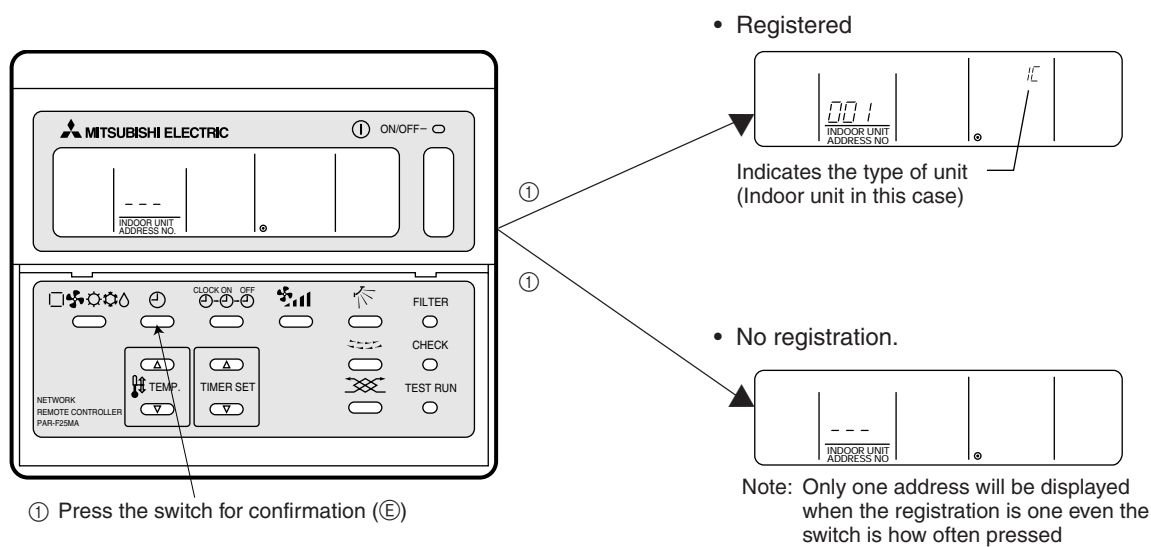




- ① With the remote controller under stopping or at the display of "HO", continuously press the (FILTER) +  switch (A + B) at the same time for 2 seconds to change to the registration mode.
- ② In order to confirm the indoor unit address already registered, press  switch (E). (See figure below.) When the group of plural sets is registered, the addresses will be displayed in order at each pressing of  switch (E).
- ③ After completing the registration, continuously press the (FILTER) +  switch (A + B) at the same time for 2 seconds to change to the original ordinary mode (with the remote controller under stopping).




- Retrieval/confirmation of registration information [3]

The registered information on a certain unit (indoor unit, heat source unit, remote controller or the like) is displayed.

[Operation procedure]

- ① With the remote controller under stopping or at the display of "HO", continuously press the (FILTER) +  switch (A + B) at the same time for 2 seconds to change to the registration mode.
- ② Operate  switch (C) for the interlocked setting mode. (See figure below.)
- ③ Assign the unit address of which registration information is desired to confirm with the   (TIMER SET) switch (H). Then press the  switch (E) to display it on the remote controller. (See figure below.) Each pressing of  switch (E) changes the display of registered content. (See figure below.)
- ④ After completing the retrieval/confirmation, continuously press the (FILTER) +  switch (A + B) at the same time for 2 seconds to change to the original ordinary mode (with the remote controller under stopping).

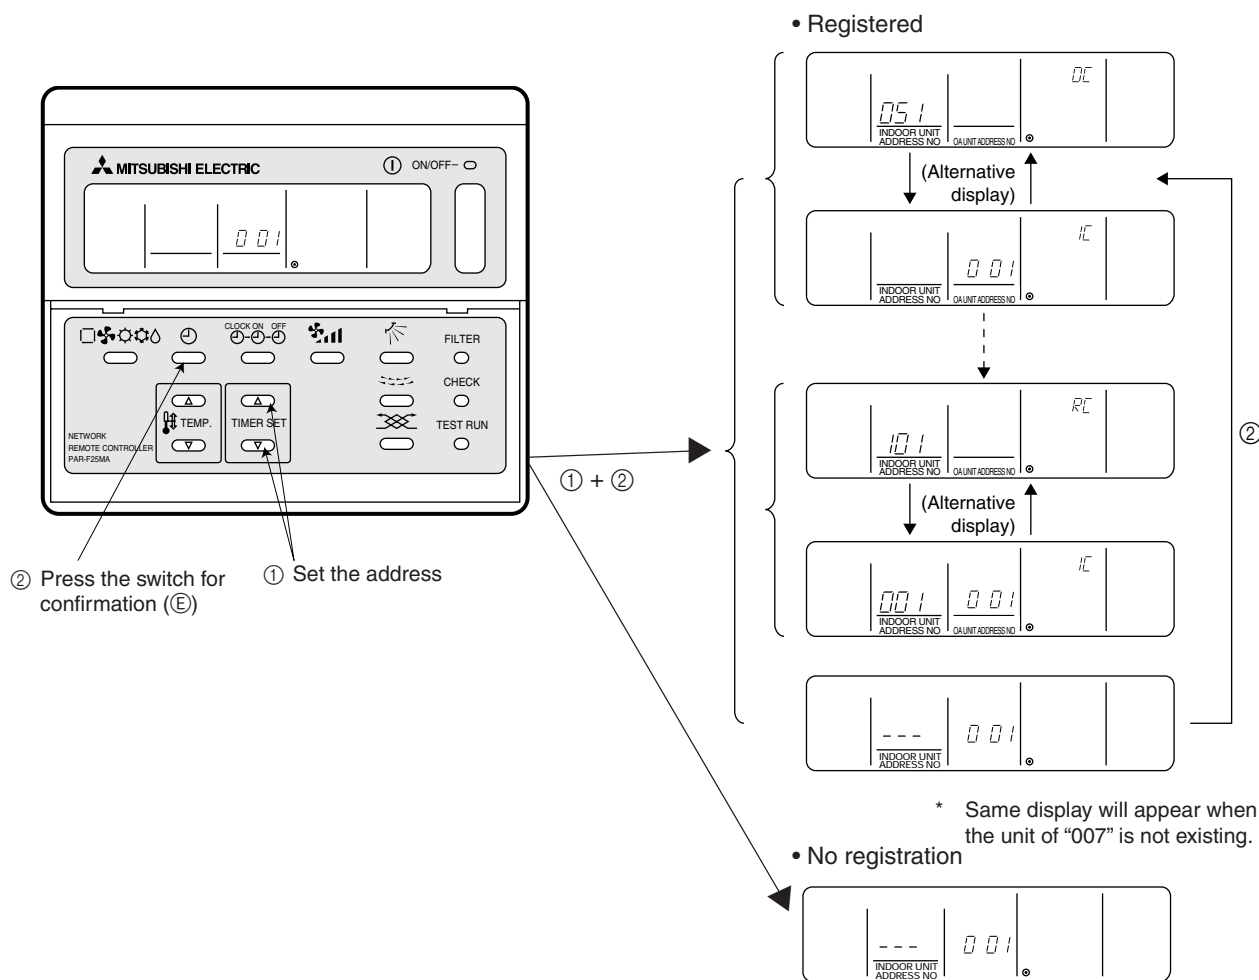

3) Method of deletion


- Deletion of group registration information of indoor unit 4

[Operation procedure]

- ① With the remote controller under stopping or at the display of "HO", continuously press the (FILTER) + switch (A) + (B) at the same time for 2 seconds to change to the registration mode.
- ② Press the switch (E) to display the indoor unit address registered. (As same as 2)
- ③ In order to delete the registered indoor unit being displayed on the remote controller, press the (F) switch two times continuously. At completion of the deletion, the attribute display section will be shown as "—".
(See figure below.)

Note: Completing the deletion of all indoor units registered on the remote controller returns to "HO" display.

- ④ After completing the registration, continuously press the (FILTER) + switch (A) + (B) at the same time for 2 seconds to change to the original ordinary mode (with the remote controller under stopping).

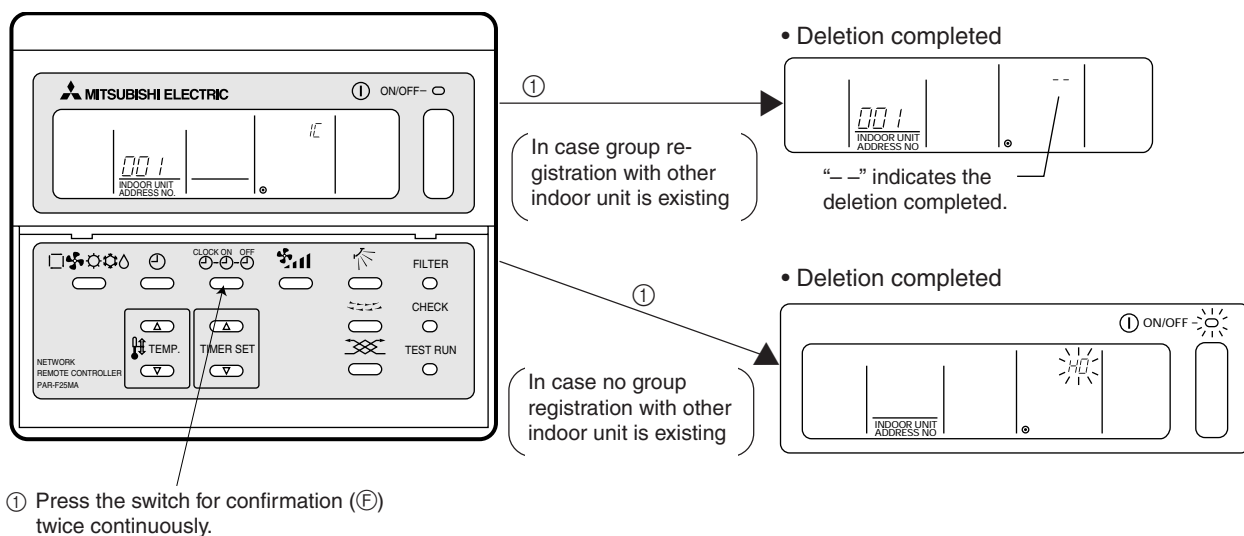

4) Deletion of information on address not existing













- Deletion of information on address not existing 5


This operation is to be conducted when “6607” error (No ACK error) is displayed on the remote controller caused by the miss setting at test run, or due to the old memory remained at the alteration/modification of group composition, and the address not existing will be deleted.

Note: The connection information (connection between indoor unit and heat source unit) on the refrigerant system can not be deleted.

An example to delete the system controller of “250” from the indoor unit of “007” is shown below.

[Operation procedure]

- ① With the remote controller under stopping or at the display of “HO”, continuously press the (FILTER) +  switch (A) + (B) at the same time for 2 seconds to change to the registration mode.
- ② Operate     switch (C) for the interlocked setting mode (ii). (See the figure below.)
- ③ Assign the unit address existing to “OA UNIT ADDRESS No.” with the   (Room temperature control) switch (C), and press  switch (E) to call the address to be deleted. (See the figure below.) As the error display on the remote controller is usually transmitted from the indoor unit, “OA UNIT ADDRESS No.” is used as the address of the indoor unit.
- ④ Press the    switch (F) twice. (See the figure below.)
- ⑤ After completing the deletion, continuously press the (FILTER) +  switch (A) + (B) at the same time for 2 seconds to return to the original ordinary mode (with the remote controller under stopping).

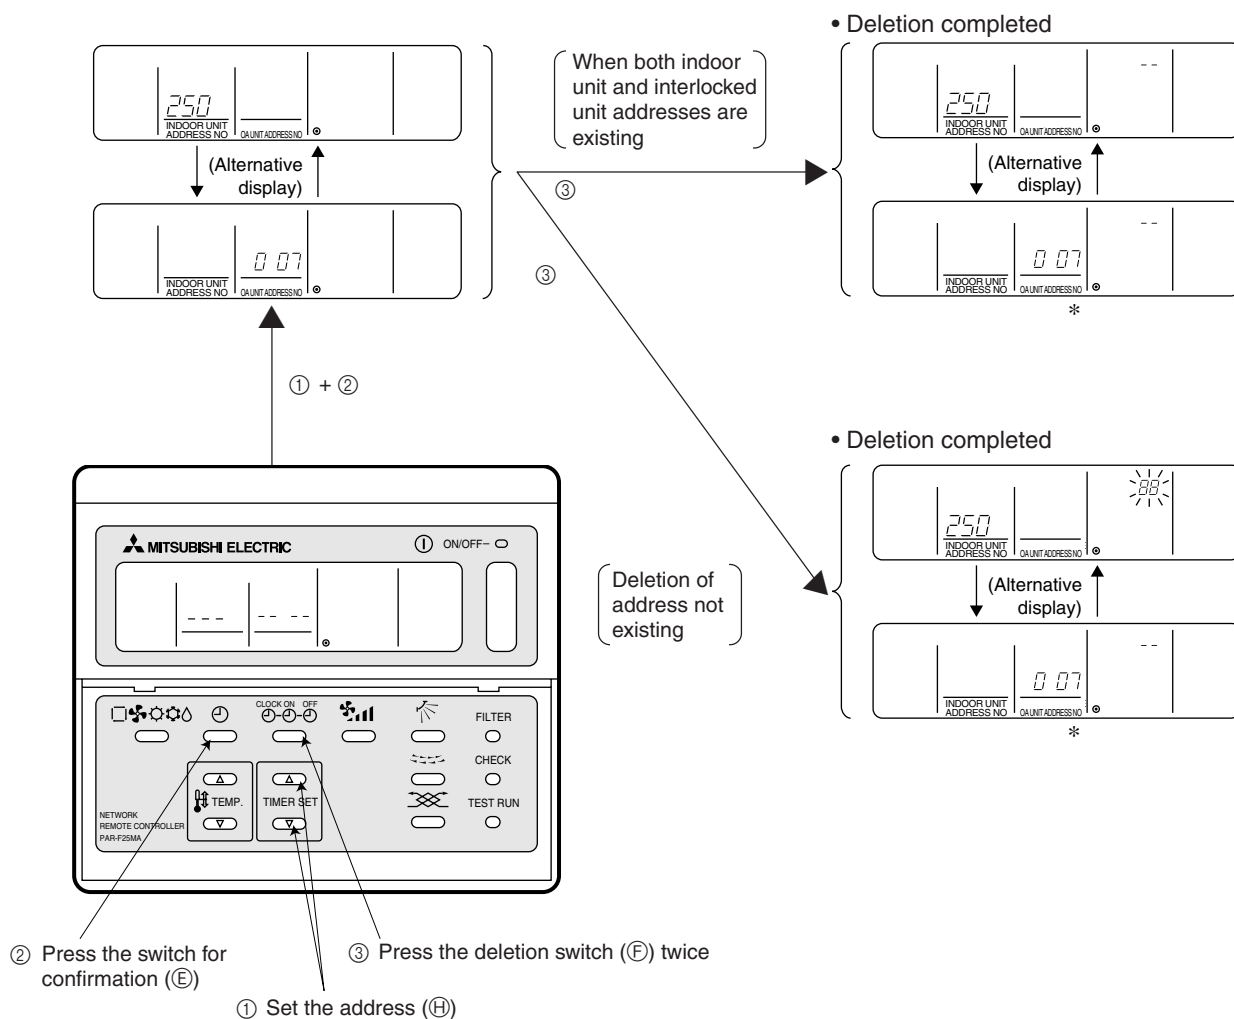

5 CONTROL

[1] Control of Heat Source Unit

(1) Initial processing

- When turning on power source, initial processing of microcomputer is given top priority.
- During initial processing, control processing corresponding to operation signal is suspended. The control processing is resumed after initial processing is completed. (Initial processing : Data processing in microcomputer and initial setting of each LEV opening, requiring approx. 2 minutes at the maximum.)

(2) Control at starting


- In case unit is started within 2 hours after turning on power source at low ambient temperature (+5°C or less), the unit does not start operating for 30 minutes at the maximum.

(3) Bypass, capacity control

- Solenoid valve consists of bypass solenoid valve (SV1, SV2) bypassing between high pressure side and low pressure sider. The following operation will be provided.

1) Bypass solenoid valves SV1 and SV2 (both “open” when turned on)

Item	SV1		SV2	
	ON (Open)	OFF (Close)	ON (Open)	OFF (Close)
When starting compressor	Turned on for 4 minutes		—	
After thermost “ON is returned and after 3 minutes restart	Turned on for 4 minutes		—	
When compressor stops in cooling or heating mode	Always turned on		—	
After operation stops	Turned on for 3 minutes		—	
During oil recovery operations	Always turned on.		Always turned on.	
During 20Hz operations, at fall in low pressure	—		When Ps is 1.5kg/cm ² G (0.15MPa) or less	When Ps is 2.5kg/cm ² G (0.25MPa) or more
When high pressure rises (Pd)	When Pd reaches 27.5kg/cm ² G (2.70MPa)	When Pd is under 24kg/cm ² G (2.35MPa) and 30 seconds	When Pd reaches 26.5kg/cm ² G (2.60MPa)	When Pd is under 23.5kg/cm ² G (2.30MPa) and 30 seconds
When high pressure (Pd) rises during 20Hz operations (3 minutes after starting)	—		Turned on when high pressure (Pd) exceeds pressure limit	When high pressure (Pd) is 20kg/cm ² G (1.96MPa) or less
When discharge temperature rises (3 minutes after starting)			When temp. exceeds 130°C	When discharge temp. is 115°C

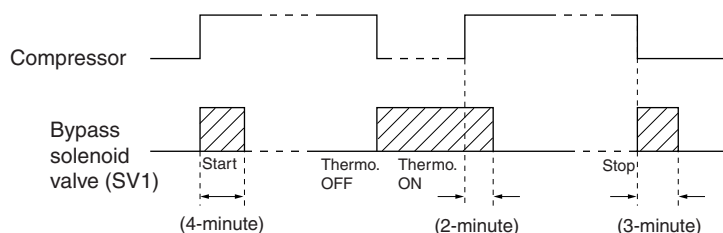

(4) Frequency control

- Depending on capacity required, capacity control change and frequency change are performed to keep constant evaporation temperature in cooling operations, and high pressure saturation temperature in heating operation.
- Frequency change is performed at the rate of 2Hz/second across 20 ~ 105Hz range.

1) Frequency control starting



- 60Hz is the upper limit for 3 minutes after starting.
- 75Hz is the upper limit within 30 minutes at the first starting compressor after turning on power source.

2) Pressure limit

The upper limit of high pressure (Pd) is set for each frequency.

When the limit is exceeded, frequency is reduced every 10 seconds.

(Frequency decrease rate (Hz) : 22% of the present value)

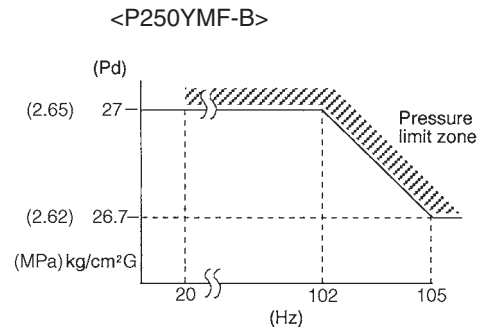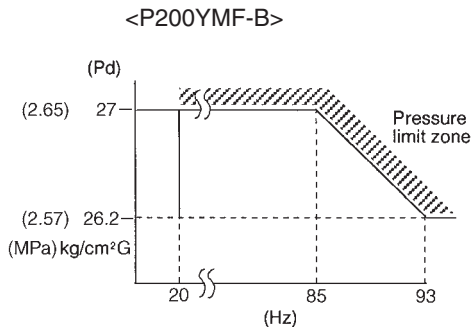

3) Discharge temperature limit

Discharge temperature (Td) of compressor is detected during operation. If the upper limit is exceeded, the frequency is reduced. (Change rate : 5% of the present value)

- 30 seconds after starting compressor, control is performed every minute.
- Operation temperature is 130°C.

4) Periodical frequency control

Frequency control is periodically performed except for the frequency controls at operation start, status change, and protection.

① Cycle of periodical frequency control

Periodical frequency control is performed every minute after the time specified below has passed.

- 20 sec after starting compressor
- 20 sec after frequency control by discharge temperature or pressure limit

② Amount of frequency change

The amount of frequency change is controlled corresponding to evaporation temperature and high pressure saturation temperature.

③ Back up of frequency control by bypass valve


During 20Hz operations, frequency is backed up by turning on (opening) bypass valve (SV2).

• Cooling

During 20Hz operations 3 minutes after starting compressor, bypass valve is turned on when, Ps is 1.5kg/cm²G (0.15MPa) or less and turned off when Ps is 2.5kg/cm²G (0.25MPa) or more.

• Heating

During 20Hz operations 3 minutes after starting compressor, SV2 turned on when high pressure (Pd) exceeds pressure limit and turned off when Pd falls to 20kg/cm²G (1.96MPa) or less.

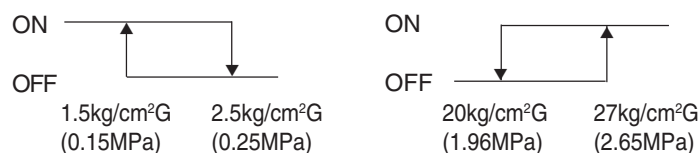

(5) Oil return control (Electronic expansion valve <SLEV>)

- Oil return LEV (SLEV) opening is dependent on compressor frequency and ambient temperature.
- SLEV is closed (0) when compressor stops, and SLEV is set (50) for 10 minutes after starting compressor.

(6) Control of liquid level detecting heater

Detect refrigerant liquid level in accumulator, and heat refrigerant with liquid level heater for judging refrigerant amount. 6 steps of duty control is applied to liquid level heater depending on frequency and outdoor air temperature, 1 minute after starting compressor.

(7) Judgement and control of refrigerant amount


Judge refrigerant amount by detecting refrigerant liquid surface accumulator.

1) Judgement of accumulator liquid level

Return refrigerant from accumulator liquid level detecting circuit to compressor inlet pipe, detect piping temperature, and judge liquid level.

When heated with heater, liquid refrigerant temperature is almost equal to low pressure saturation temperature, and gas refrigerant temperature is a little higher than low pressure saturation temperature. By comparing these temperatures with low pressure saturation temperature T_e in accumulator inlet portion, refrigerant liquid level can be judged.

Accumulator liquid level is judged in 3 steps as shown in the figure, from low pressure saturation temperature T_e and liquid level detecting temperatures (TH3, TH4). After deciding refrigerant status (Liquid : TH3 and TH4 are $T_{H2}+9^{\circ}\text{C}$ or less, Gas : TH3 and TH4 are $T_{H2}+9^{\circ}\text{C}$ or more), judge liquid level by comparing TH3 and TH4.

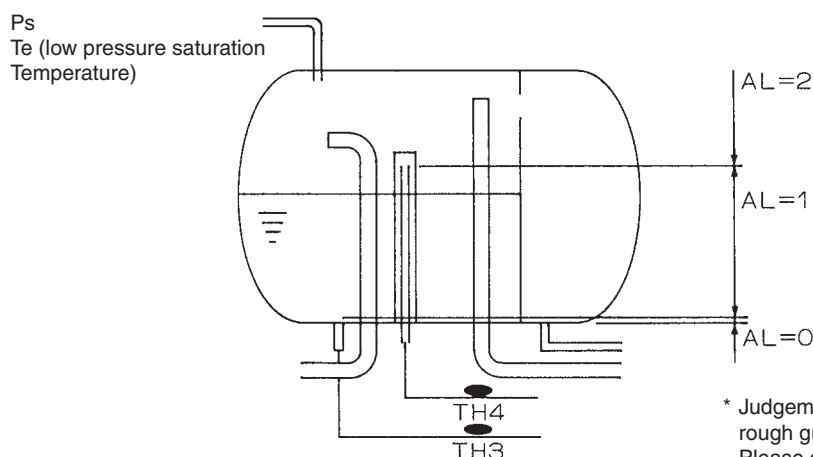

2) Control of refrigerant amount

Cooling

(a) Prohibition of liquid level detection

- Liquid level is detected in normal conditions except for the following:
For 6 minutes after starting unit, and during unit stopping.

(b) In case $AL=2$ and $T_d - T_c \leq 20$ is detected for 3 consecutive minutes during liquid level detection (control at excessive refrigerant replenishment and trouble mode)

- Changed to intermittent fault check mode preceded by 3 minutes restart prevention. Error stop is observed when trouble is detected again in the same intermittent fault check mode (for 30 minutes after unit stops for intermittent fault check).
- When turning on liquid level trouble ignore switch (SW2-6), error stop is not observed, and 3 minutes restart prevention by intermittent fault check mode is repeated. However, LED displays overflow.
(Turning SW2-6 on makes the error of $TH6 < \text{outdoor air sensor} >$ ineffective.)

(c) When operation mode shows "Stop", excessive or insufficient refrigerant display and excessive or insufficient refrigerant ignore display are extinguished.

Heating

(a) Prohibition of liquid level detection

Liquid level is detected in normal conditions except for the following.

- For 6 minutes after starting unit, and during unit stopping (including restart after overflow ignored).
- During defrosting operations and for 6 minutes after defrosting.

(b) In case $AL=2$ and $T_d-T_c \leq 20$ deg is detected for 3 consecutive minutes during liquid level detection (control at excessive refrigerant replenishment and trouble mode)

- Changed to intermittent fault check mode preceded by 3 minutes restart prohibition. Error stop is observed when trouble is detected again in the same intermittent fault check mode (for 30 minutes after unit stops for intermittent fault check).
- When turning on liquid level trouble ignore switch (SW2-6), error stop is not observed, and 3 minutes restart prevention by intermittent fault check mode is repeated. However, LED displays overflow.
(Turning SW2-6 on makes the error of TH6 < outdoor air sensor > ineffective.)

(8) Control of heat source unit fan and heat source unit heat exchanger capacity

1) Control system

Depending on capacity required, control SV3~6, SV71~73, for maintaining evaporation temperature (0°C) in cooling operations, and high pressure saturated temperature (52°C) in heating operations.

2) Heat exchanger pattern

Mode	Heat Exchanger Switching							Remarks
	SV3	SV4	SV5	SV6	SV71	SV72	SV73	
Cooling-only	○	○	○	×	○	×	×	
	○	○	○	×	×	×	×	
	○	○	×	×	×	×	×	
	○	×	×	×	×	×	×	
	○	×	×	×	×	○	×	8 HP only
	×	○	×	×	×	×	×	10 HP only
	×	○	×	×	×	○	×	10 HP only
	×	×	×	×	×	×	×	
Cooling-main	○	○	○	×	○	×	×	
	○	○	○	×	○	○	×	
	○	○	○	×	×	○	×	
	○	○	×	×	×	×	×	8 HP only
	○	○	×	×	×	○	×	
	○	×	×	×	×	×	×	
	○	×	×	×	×	○	×	
	○	×	×	○	×	×	×	8 HP only
	×	○	×	×	×	×	×	10 HP only
	×	○	×	×	×	○	×	10 HP only
	×	○	×	○	×	×	×	10 HP only
	×	×	×	×	×	×	×	
	×	×	×	×	×	○	×	
	×	×	×	○	×	×	×	
	×	×	×	○	×	○	×	
Heating-only	○	○	○	×	×	×	○	
	○	○	×	×	×	×	○	10 HP only
	○	○	○	×	×	○	○	
	○	○	×	×	×	○	○	
	○	○	○	○	×	○	○	
	○	×	×	○	×	○	○	
	×	×	×	○	×	○	○	
Heating-main	○	○	○	×	×	×	○	
	○	○	×	×	×	×	○	10 HP only
	○	○	○	×	×	○	○	
	○	○	×	×	×	○	○	
	○	○	○	○	×	○	○	
	○	×	×	○	×	○	○	
	×	×	×	○	×	○	○	

[2] Control box cooling system

In PQRY, in order to cool the parts in the control box which emit heat, a refrigerant evaporator has been placed in the bottom of the control box (unit frame side). (See the figure.)

The control box is also mounted in the frame and when the inverter operates, it operates the control box internal cooling fan as well as supplying refrigerant to the evaporator, thus creating air passages in the direction shown by the arrows.

(1) Cooling fan control

(a) If the temperature of fin is over 80°C when the inverter is just turned on, run the fan until the temperature drops below 80°C. During this operation, turning on the inverter is prohibited.

(b) When the inverter is operating Always ON

(c) Once the fan goes on, it forcibly remains ON for 5 minutes.

Note: By mounting the control box in the frame, a structure is created where air passages are formed, so when mounting the control box, be sure to push it in to the back. Also, at that time, be careful of tearing of the seal material affixed to the frame.


(2) LEV 2 control

(a) LEV2 control range.

$$0 \leq \text{LEV 2} \leq 150 \text{ pulses}$$

(b) LEV2 Control method

SHB=THINV-TH2	THHS	TH10	LEV2
$6 \leq \text{SHB}$	—	—	UP
SHB < 6	THHS $\geq 55^\circ\text{C}$	—	UP
	THHS < 55°C	TH10 > 80	UP
		TH10 ≤ 80	DOWN

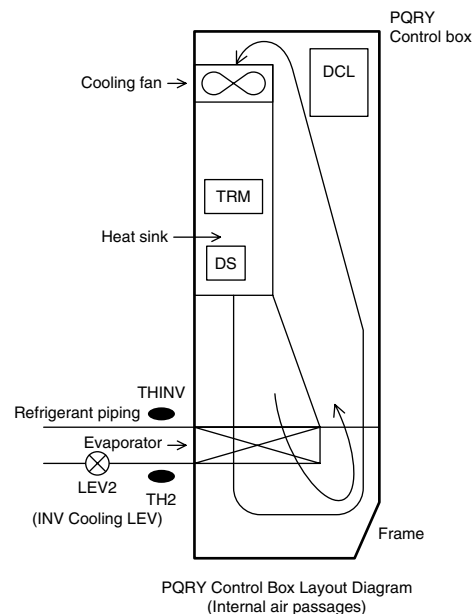

[3] Control of BC Controller

(1) Control of SVA, SVB and SVC

SVA, SVB and SVC are turned on and off depending on connection mode.

Mode Connection	Cooling	Heating	Stop	Defrost
SVA	ON	OFF	OFF	OFF
SVB	OFF	ON	OFF	OFF
SVC	ON	OFF	OFF	OFF

(2) Control of SVM

SVM is turned on and off corresponding to operation mode.

Operation mode	Cooling-only	Cooling-main	Heating-only	Heating-main	Stop
SVM	ON	OFF	OFF	OFF	OFF

(3) Control of LEV

LEV opening (sj) is controlled corresponding to operation mode as follows:

(Number of pulse)


Operation mode	Cooling-only	Heating-only	Cooling-main	Heating-main	Stop
LEV1	2000	60	<ul style="list-style-type: none"> • Liquid level control *3 • Differential pressure control *2 	60	1000
LEV3	Superheat control *1	Differential Pressure control *2		Differential pressure control *2	60

*1	Superheat control	Control every minute so that superheat amount detected by bypass inlet and outlet temperatures (TH12, TH15) stay in the specified range.
*2	Differential pressure control	Control every minute so that detected differential pressure (PS1, PS3) stay in the specified range.
*3	—	60 or more pulses are sometimes detected because of rise in liquid side pressure (PS1).

* Please confirm that the above parts of BC controllers are being color-coded and shown with the name plate inside the BC controller unit.


[4] Operation Flow Chart

(1) Heat source unit

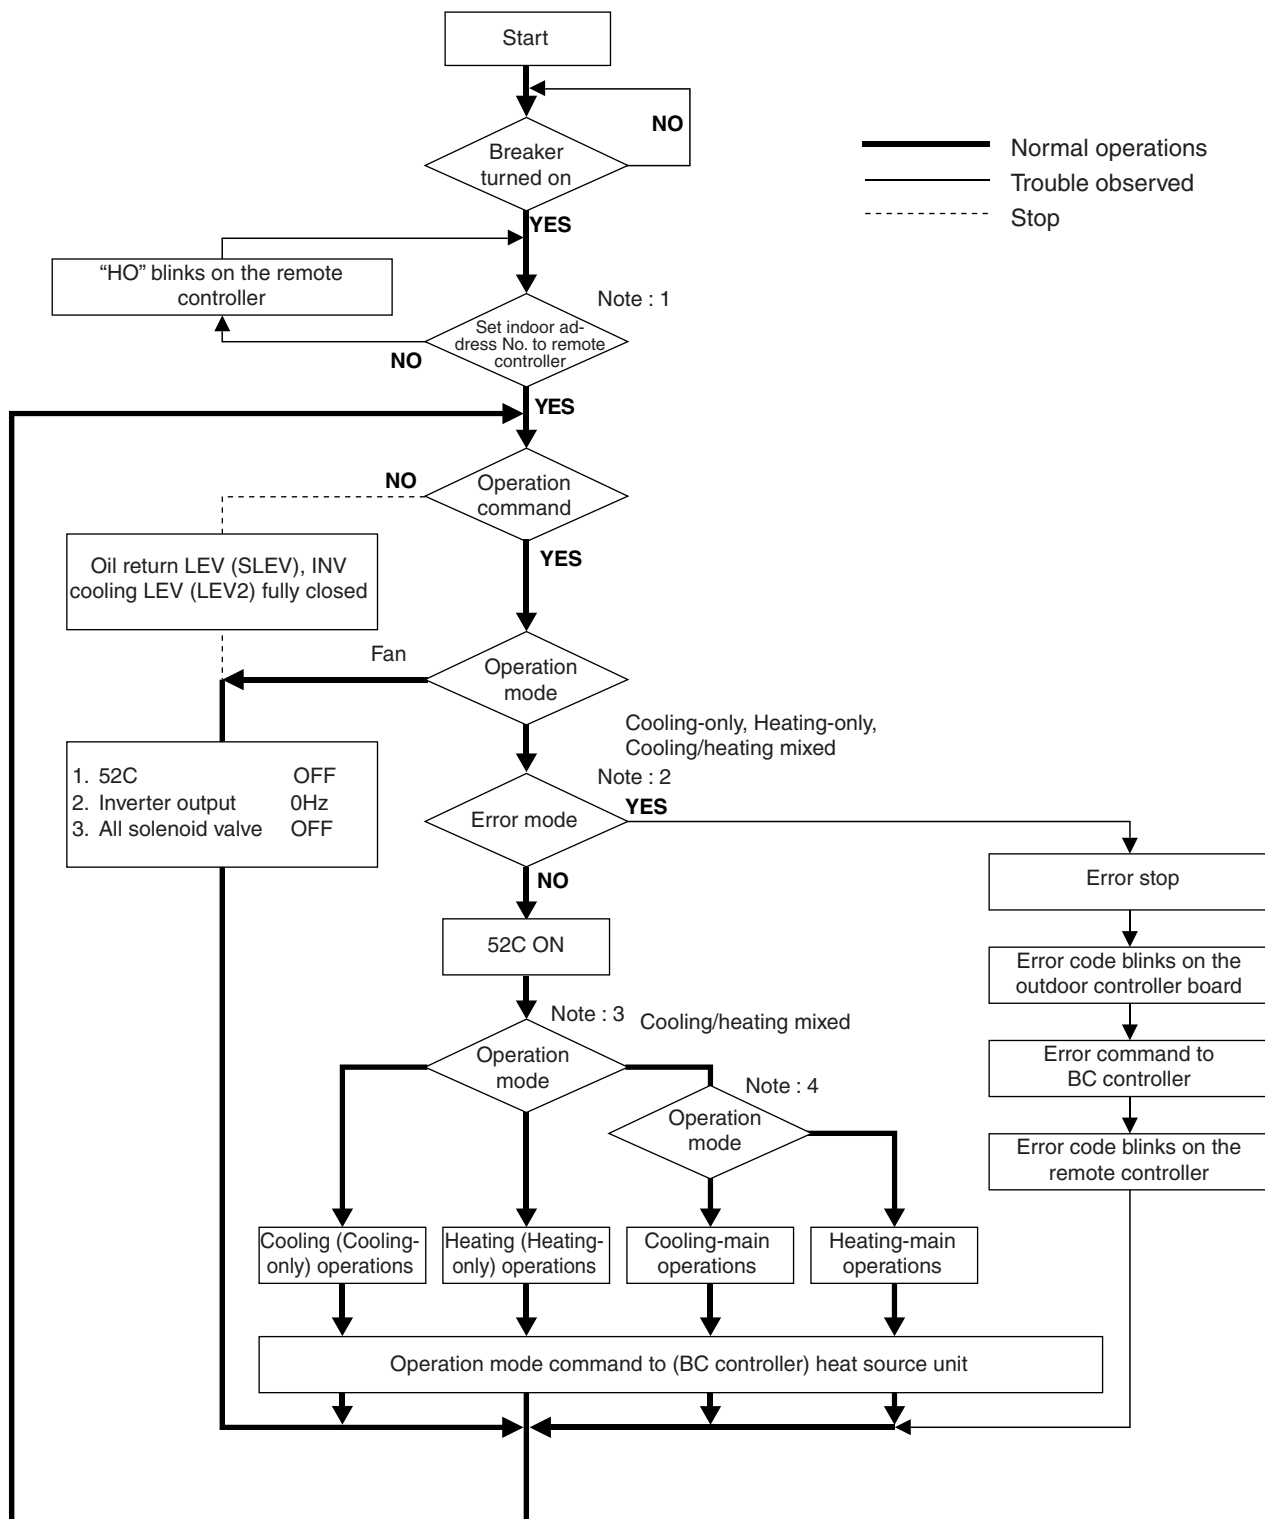


Note : 1	For about 3 minutes after turning on power source, address and group information of heat source unit, BC, controller indoor unit, and remote controller are retrieved by remote controller, during which "HO" blinks on and off on remote controller. In case indoor unit is not grouped to remote controller, "HO" display on remote controller continues blinking even after 3 minutes after turning on power source.
Note : 2	Two trouble modes included indoor unit side trouble, (BC controller trouble) and heat source unit side trouble. In the case of indoor unit side trouble, error stop is observed in heat source unit only when all the indoor units are in trouble. However, if one or more indoor units are operating normally, heat source unit shows only LED display without undergoing stop.
Note : 3	On PUHY system, operation mode conforms to mode command by indoor unit. However, when heat source unit is being under cooling operation, the operation of indoor unit will be prohibited even by setting a part of indoor units under operation, or indoor unit under stopping or fan mode to heating mode. Reversely when heat source unit is being heating operation, the same condition will be commenced. On PURY system, operation mode conforms to mode command by BC controller.
Note : 4	In case BC controller issues cooling/heating mixed operation mode, heat source unit decides operation mode of cooling-main operation or heating-main operation.

(2) BC controller

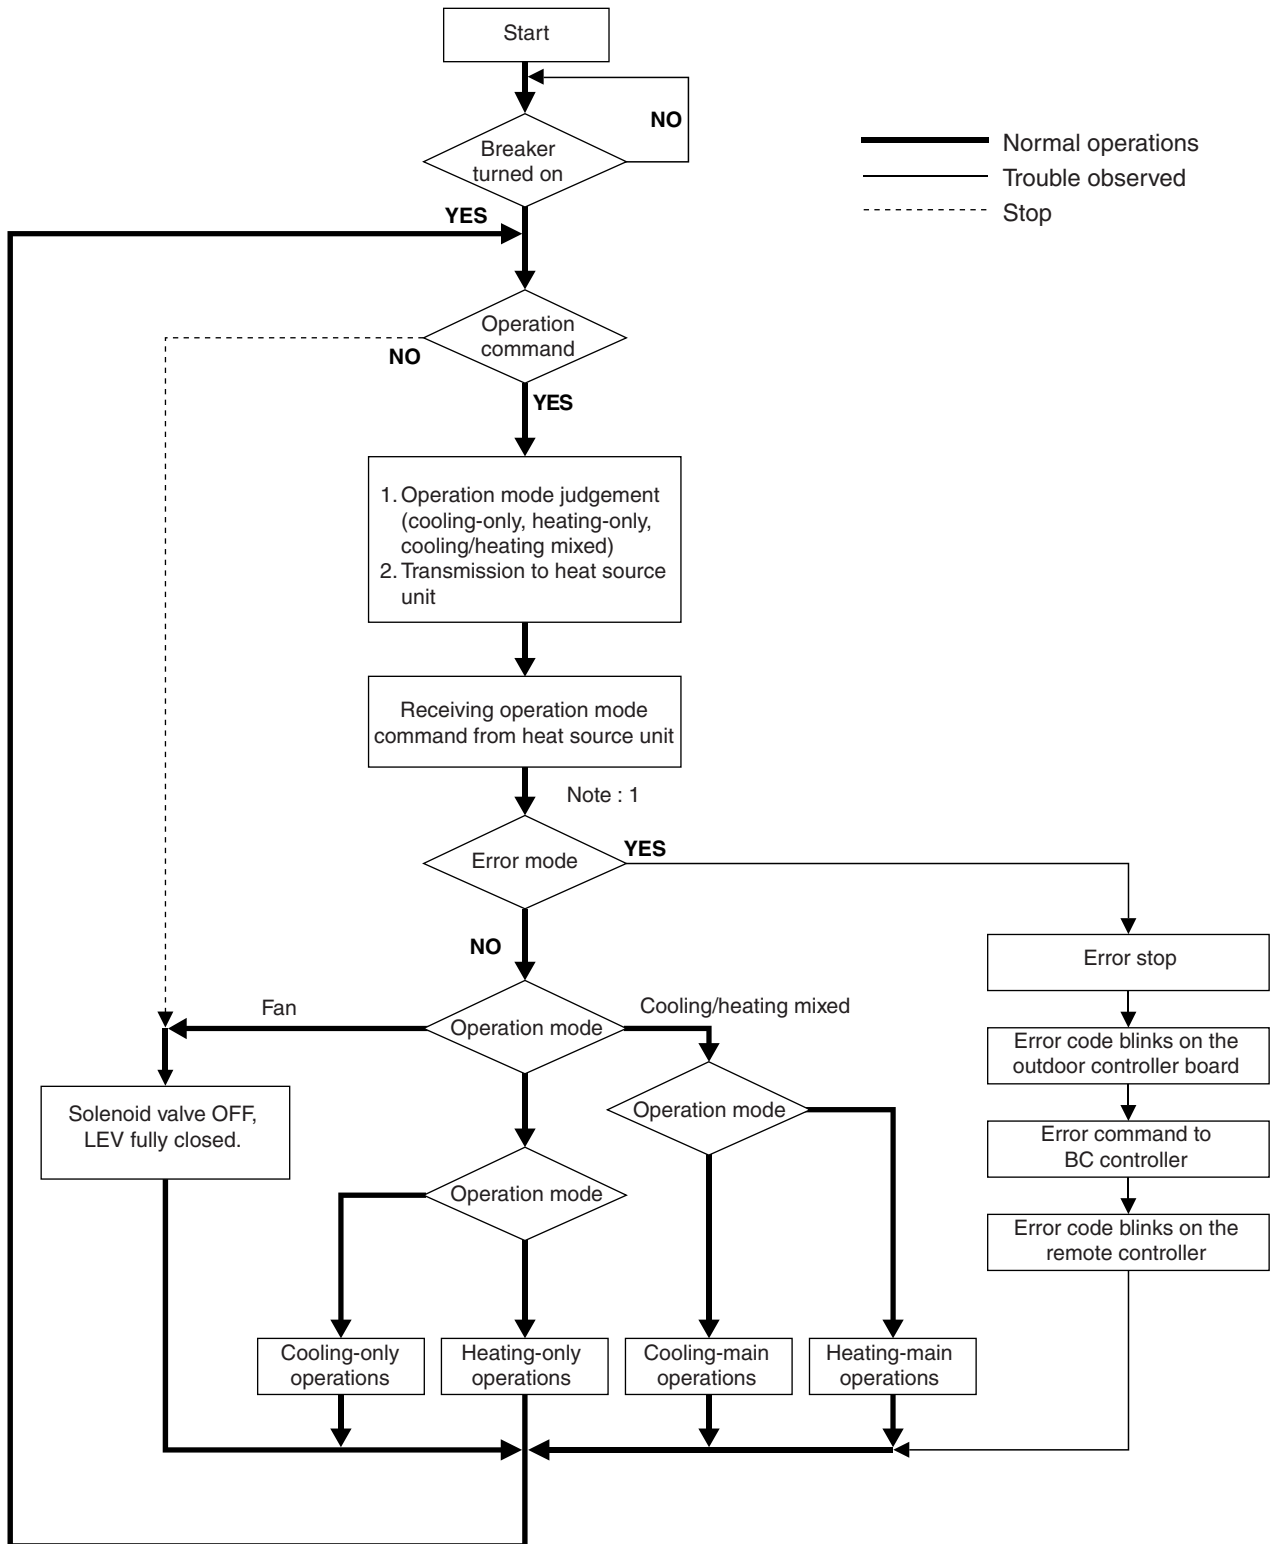


Note : 1 Two error modes include indoor unit side trouble, BC controller trouble, and heat source unit side trouble. In the case of indoor unit side trouble, error stop is observed in the concerned indoor unit only, and in the cases of BC controller and heat source unit side troubles, error stop is observed in all the indoor units, BC controller, and heat source unit.

(3) Indoor unit

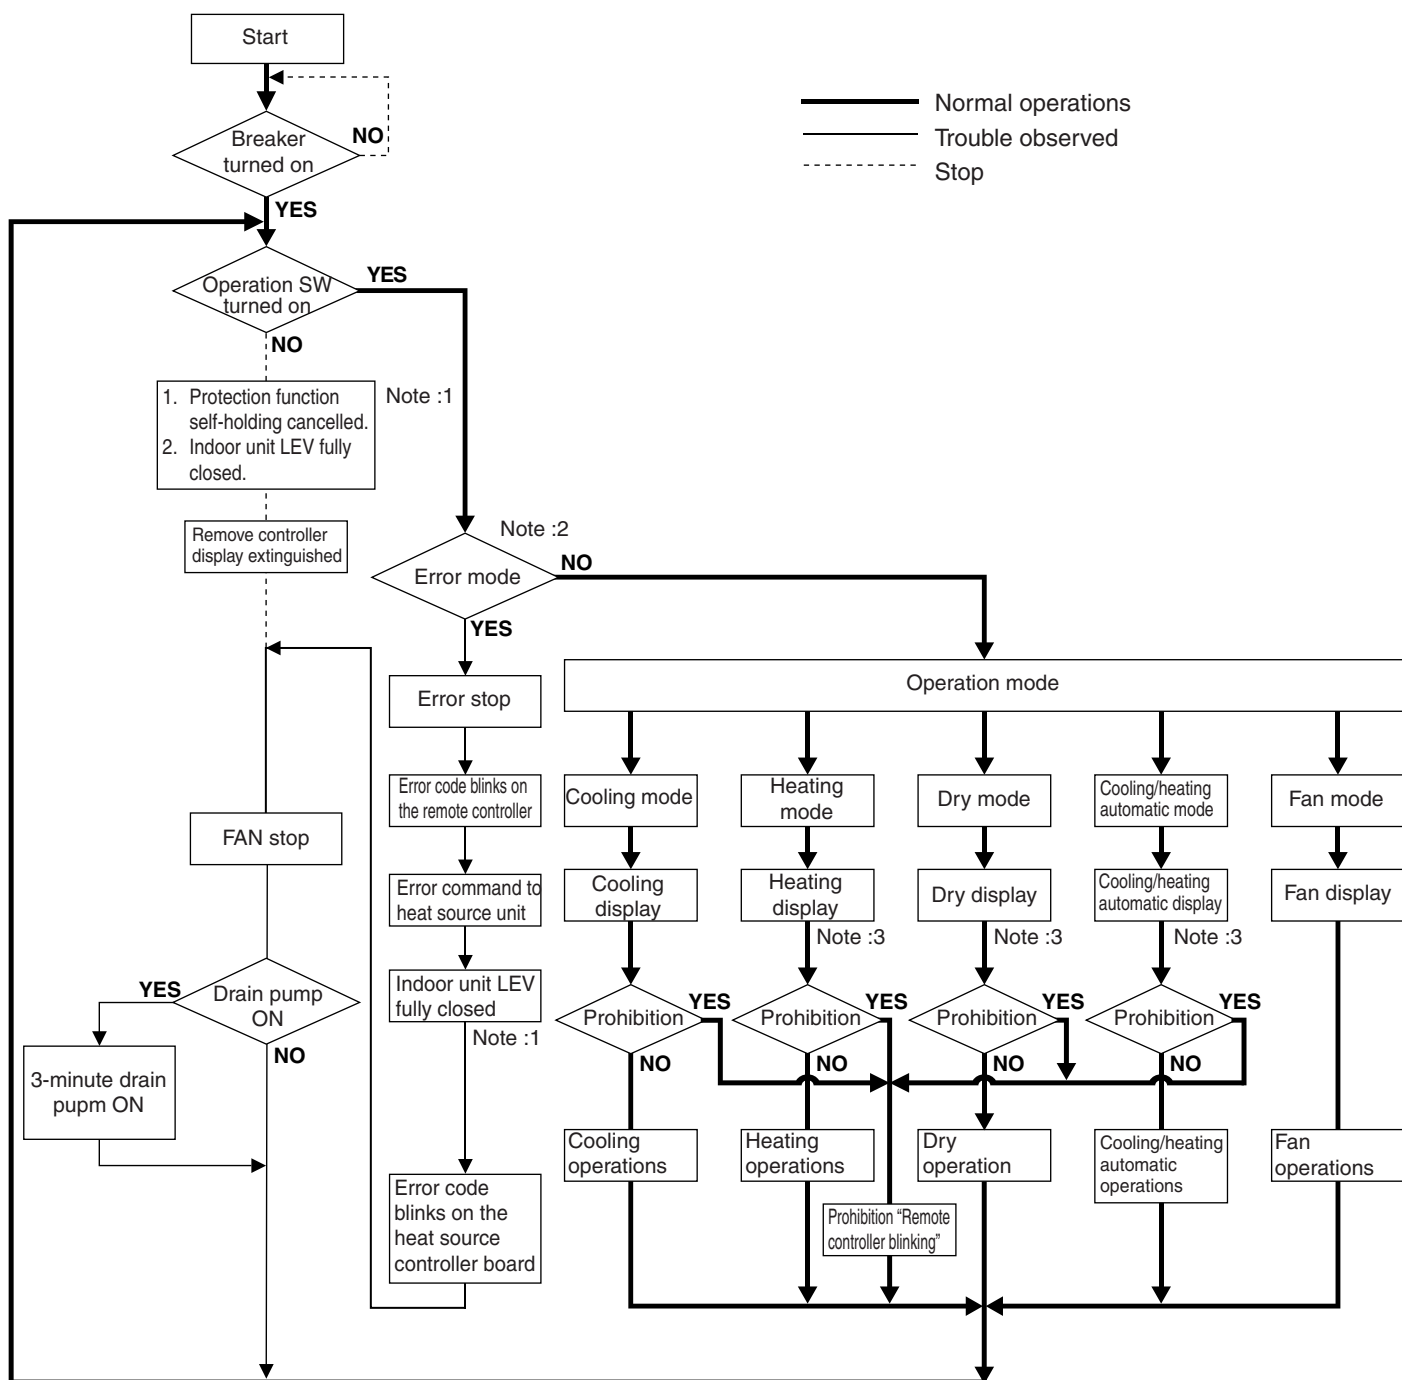


Note : 1	Indoor unit LEV fully closed : Opening 60
Note : 2	Two error modes include indoor unit trouble, (BC controller trouble) and heat source unit side trouble. In the case of indoor unit trouble, error stop is observed in the concerned indoor unit only, and in the cases of (BC controller and) heat source unit side troubles, error stop is observed in all the indoor units connected.
Note : 3	"Prohibition" status is observed (when several indoor units are connected to one connection, of BC controller and) when connection mode is different from indoor unit operation mode. (Operation mode display on the remote controller blinks on and off, fan stops, and indoor unit LEV is fully closed.)


(4) Cooling operation

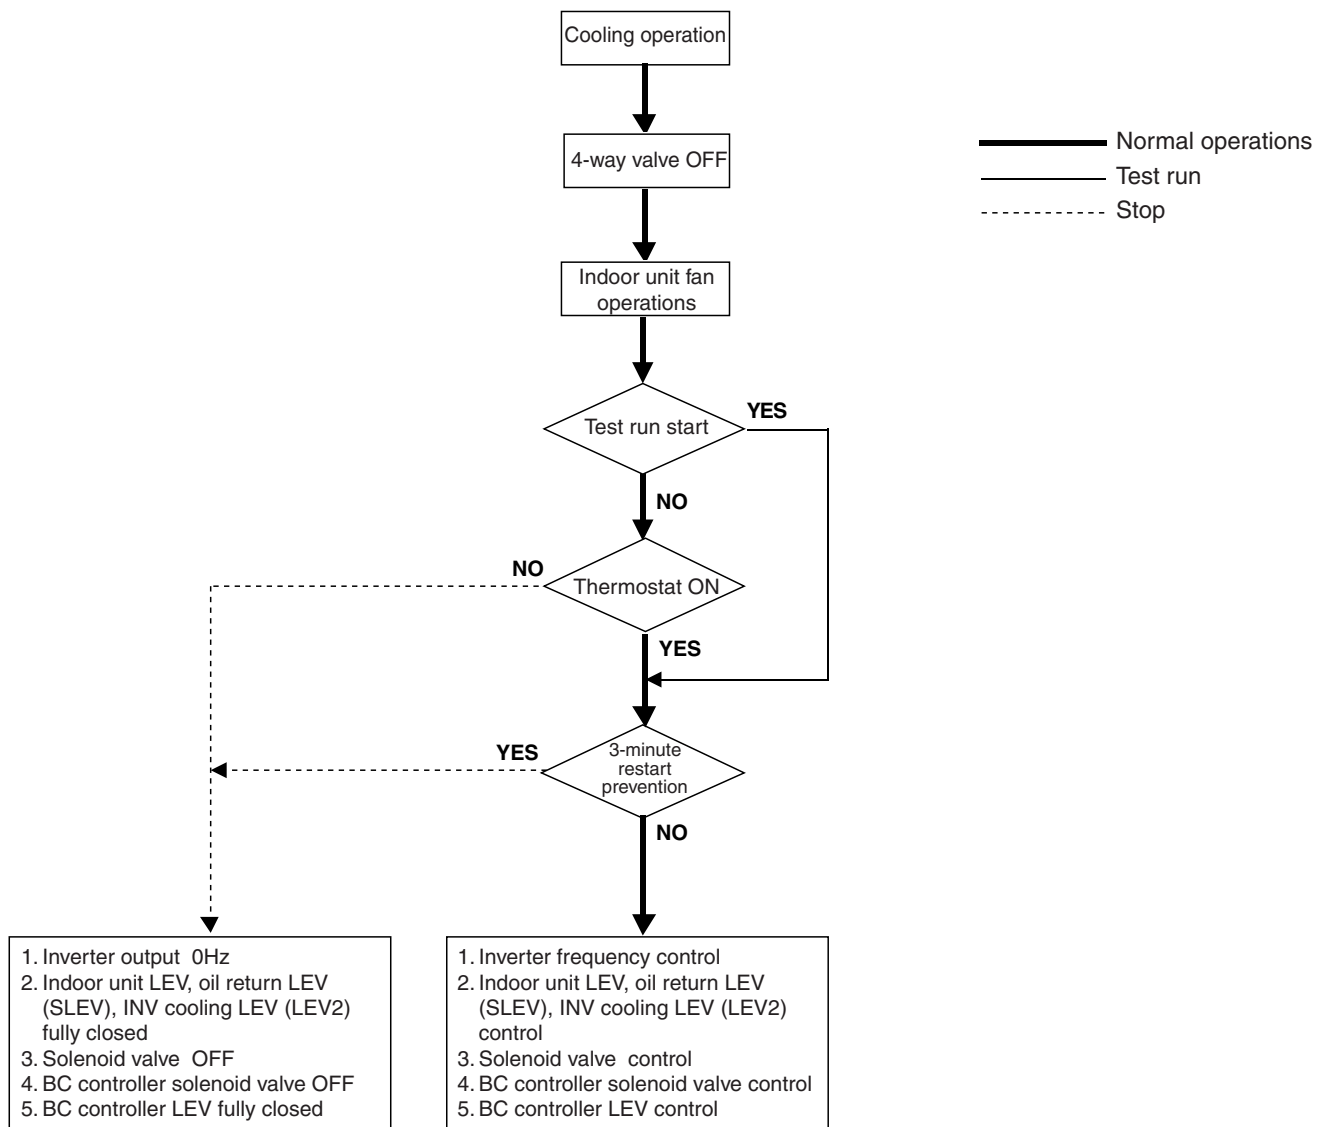

(5) Heating operation


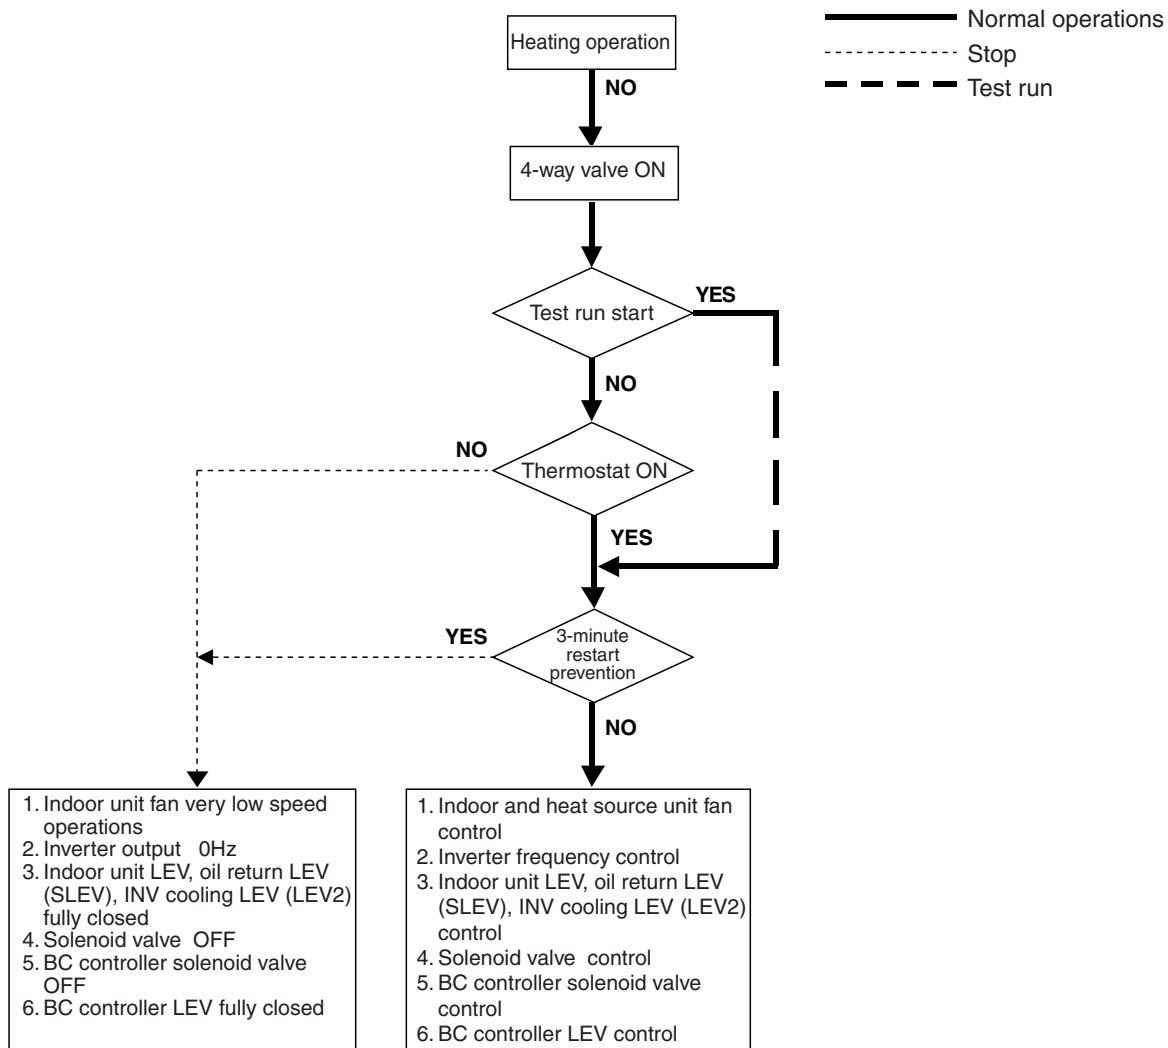


(6) Dry operation

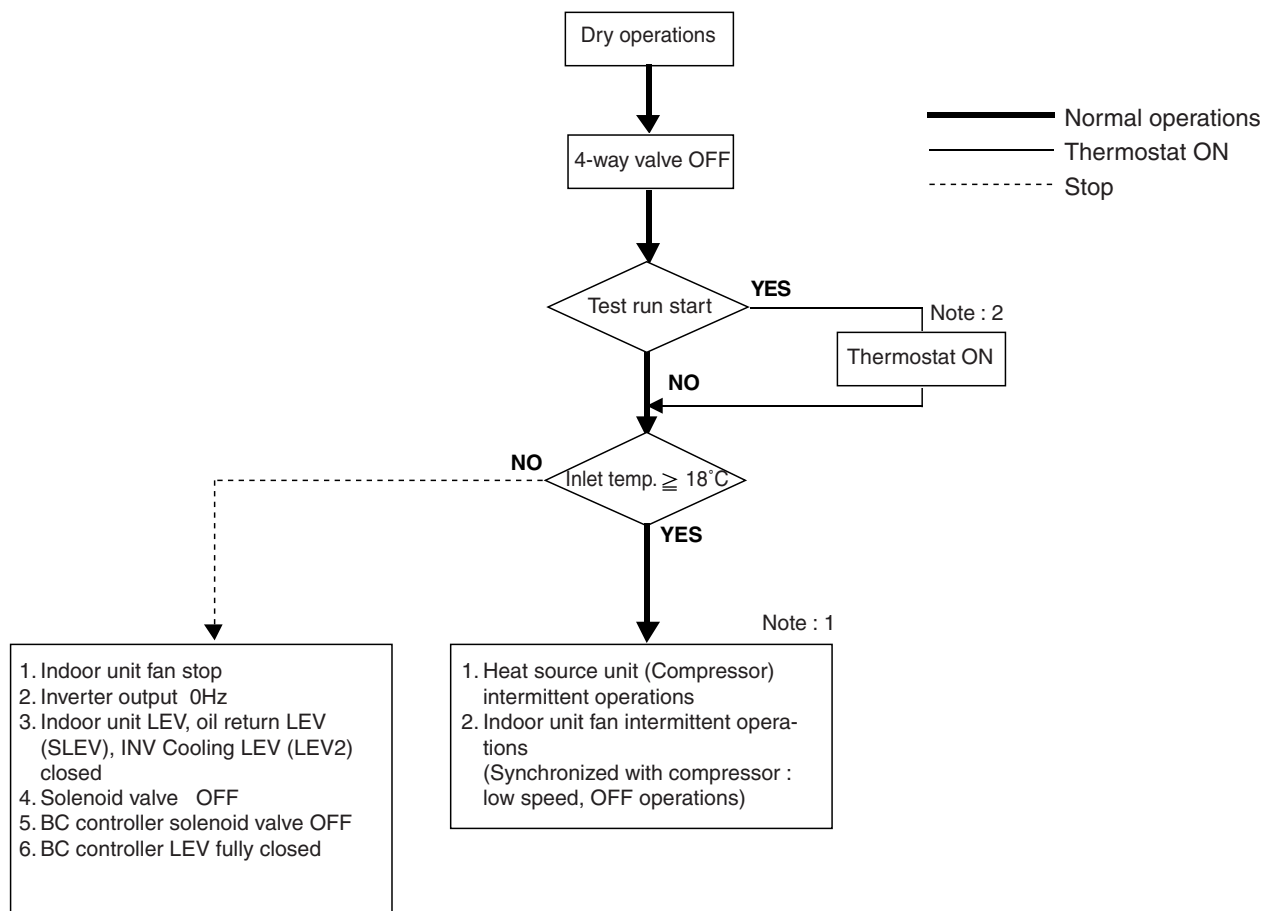


Note : 1	When indoor unit inlet temperature exceeds 18°C, heat source unit (compressor) and indoor unit fan start intermittent operations synchronously. Operations of heat source unit, BC controller, indoor unit LEV and solenoid valve accompanying compressor are the same as those in cooling operations.
Note : 2	Thermostat is always kept on in test run, and indoor and heat source unit intermittent operation (ON) time is a little longer than normal operations.

[5] List of Major Component Functions

	Name	Symbol (function)	Application	Specification	Check method
Heat source unit	Compressor	MC	Adjust refrigerant circulation by controlling operating frequency and capacity control valve with operating pressure.	Low pressure shell scroll type with capacity control mechanism Winding resistance: Each phase 0.388Ω (20°C)	
	High pressure sensor	63HS	1) High press. detection. 2) Frequency control and high pressure protection	 <div>63HS Pressure 0~30 kg/cm²G (0~2.94MPa) Vout 0.5~3.5 V Gnd (black) Vout (white) Vc (DC5V) (red)</div>	
	Low pressure sensor	63LS	1) Detects low pressure 2) Calculates the refrigerant circulation configuration. 3) Protects the low pressure	 <div>63LS Pressure 0~10 kg/cm²G (0~0.98MPa) Vout 0.5~3.5 V Gnd (black) Vout (white) Vc (DC5V) (red)</div>	
	Pressure switch	63H	1) High pressure detection 2) High pressure protection	Setting 30kg/cm ² G (2.94MPa) OFF	Continuity check
	Thermistor	TH1 (discharge)	1) Discharge temperature detection 2) High pressure protection	R ₁₂₀ =7.465kΩ B _{25/120} =4057 Rt = 7.465exp {4057($\frac{1}{273+t}$ - $\frac{1}{273+120}$)}	Resistance value check
			20°C : 250kΩ 70°C : 34kΩ 30°C : 160kΩ 80°C : 24kΩ 40°C : 104kΩ 90°C : 17.5kΩ 50°C : 70kΩ 100°C : 13.0kΩ 60°C : 48kΩ 110°C : 9.8kΩ		
		TH2 (low pressure saturation temperature)	1) Detects the saturated vapor temperature. 2) Calculates the refrigerant circulation configuration. 3) Controls the compressor frequency. 4) Controls the valves for heat exchanger capacity control.	R ₀ =33kΩ B _{0/100} =3965 Rt = 33exp{3965($\frac{1}{273+t}$ - $\frac{1}{273+0}$)} -20°C : 92kΩ -10°C : 55kΩ 0°C : 33kΩ 10°C : 20kΩ 20°C : 13kΩ 30°C : 8.2kΩ	Resistance value check
		TH3 TH4 (liquid level detection)	Detection of refrigerant liquid level inside accumulator by temperature difference of TH2, TH3 and TH4	R ₀ =15kΩ B _{0/100} =3460 Rt = 15exp{3460($\frac{1}{273+t}$ - $\frac{1}{273+0}$)}	
		TH6 (Inlet water air temperature)	1) Inlet water temperature detection 2) Liquid level heater, and opening setting for oil return	0°C : 15kΩ 10°C : 9.7kΩ 20°C : 6.4kΩ 25°C : 5.3kΩ 30°C : 4.3kΩ 40°C : 3.1kΩ	
		TH9	1) Detects the CS circuit fluid temperature. 2) Calculates the refrigerant circulation configuration.		
		THINV	1) Detects the temperature at the inverter cooler's heat exchanger outlet. 2) Controls the LEV2 opening angle.		

	Name	Symbol (function)	Application	Specification	Check method
Heat source unit	Thermistor	TH10	1) Detects the compressor shell temperature. 2) Provides compressor shell overheating protection.	$R_{120}=7.465k\Omega$ $B_{25/120}=4057$ $R_t = 7.465 \exp \left\{ 4057 \left(\frac{1}{273+t} - \frac{1}{273+120} \right) \right\}$ 20°C : 250kΩ 70°C : 34kΩ 30°C : 160kΩ 80°C : 24kΩ 40°C : 104kΩ 90°C : 17.5kΩ 50°C : 70kΩ 100°C : 13.0kΩ 60°C : 48kΩ 110°C : 9.8kΩ	
		THHS	1) Detects the inverter cooling fin temperature. 2) Provides inverter overheating protection. 3) Controls the control box cooling fan.	$R_{50}=17k\Omega$ $B_{25/50}=4170$ $R_t = 17 \exp \left\{ 4170 \left(\frac{1}{273+t} - \frac{1}{273+50} \right) \right\}$ -20°C : 605.0kΩ 50°C : 17.0kΩ -10°C : 323.3kΩ 60°C : 11.5kΩ 0°C : 180.9kΩ 70°C : 8.0kΩ 10°C : 105.4kΩ 80°C : 5.7kΩ 20°C : 63.8kΩ 90°C : 4.1kΩ 30°C : 39.9kΩ 100°C : 3.0kΩ 40°C : 25.7kΩ	
	Solenoid valve	SV1 (discharge - suction bypass)	1) High/low press. bypass at starting/stopping and capacity control at low load 2) Discharge press. rise suppression	AC 220~240V Open at energizing and close at deenergizing	<ul style="list-style-type: none"> Continuity check by tester Temperature of inlet and outlet.
		SV2 (discharge - suction bypass)	Capacity control and high press. rise suppression (backup for frequency control)		
		SV3 ~ 6 SV71~73	Control of heat exchanger capacity.		
	Linear expansion valve	SLEV	Adjustment of liquid refrigerant (oil) return foam accumulator	DC12V stepping motor drive Valve opening 0~450 pulse (SLEV), 0~150 pulse (LEV2)	
		LEV2	Controls the volume of refrigerant flowing to the inverter cooler's heat exchanger.		
	Liquid level detection heater	CH2, CH3 (accumulator liquid level detection)	Heating of refrigerant in accumulator liquid level detection circuit	Cord heater : 2kΩ (1kΩ + 1kΩ) AC220~240V 20W (10W + 10W)	Resistance value check
Indoor unit	Linear expansion valve	LEV	1) Adjust superheat of heat source unit heat exchanger outlet at cooling. 2) Adjust subcool of indoor unit heat exchanger at heating.	DC12V Opening of stepping motor driving valve 60~2,000 pulses	Continuity check with tester for white-red-orange yellow-brown-blue
	Thermistor	TH21 (inlet air temperature)	Indoor unit control (thermostat)	$R_0 = 15k\Omega$ $B_{0/100} = 3460$	Resistance value check
		TH22 (piping temperature)	1) Indoor unit control (freeze prevention, hot adjust, etc.) 2) LEV control in heating operation (Subcool detection)	$R_t = 15 \exp \left\{ 3460 \left(\frac{1}{273+t} - \frac{1}{273+0} \right) \right\}$ 0°C : 15kΩ 10°C : 9.7kΩ 20°C : 6.4kΩ 25°C : 5.3kΩ 30°C : 4.3kΩ 40°C : 3.1kΩ	
		TH23 (gas side piping temperature)	LEV control in cooling operation (Superheat detector)		


	Name	Symbol (function)	Application	Specification	Check method
BC controller	Pressure sensor	PS1	1) Liquid pressure (high-pressure) detection 2) LEV control	 <p>Pressure 0~30 kg/cm²G (0~2.94MPa) Vout 0.5~3.5 V</p> <p>1 Gnd (black) 2 Vout (white) 3 Vc (DC5V) (red)</p>	
		PS3	1) Intermediate pressure detection 2) LEV control		
	Thermistor	TH11 (liquid inlet temperature)	LEV control (liquid refrigerant control)	$R_0=15k\Omega$ $B_{0/100}=3460$ $R_t = 15 \exp\{3460(\frac{1}{273+t} - \frac{1}{273+0})\}$ 0°C : 15kΩ 10°C : 9.7kΩ 20°C : 6.4kΩ 25°C : 5.3kΩ 30°C : 4.3kΩ 40°C : 3.1kΩ	
		TH12 (bypass outlet pressure)	LEV control (superheat control)		
		TH15 (bypass outlet temperature)	LEV control (superheat control)		
		TH16 (bypass inlet temperature)	LEV control (subcool control)		
	Solenoid valve	SVM	Opens for cooling-only, defrosting.	AC 220~240V Open when energized Closed when de-energized	Continuity check by a tester
		SVA	Supplies refrigerant to cooling indoor unit.		
		SVB	Supplies refrigerant to heating indoor unit.		
		SVC	Supplies refrigerant to cooling indoor unit.		
	Electronic expansion valve	LEV1	Liquid level control Pressure control	12V DC stepping motor drive 0 to 2000 valve opening pulse	Same as LEV of indoor unit.
		LEV3	Liquid level control Pressure control		

[6] Resistance of Temperature Sensor

Thermistor for low temperature


Thermistor $R_0 = 15\text{k}\Omega \pm 3\%$ (TH3 ~ 9, THINV)

$$R_t = 15 \exp \left\{ 3460 \left(\frac{1}{273+t} - \frac{1}{273+0} \right) \right\}$$

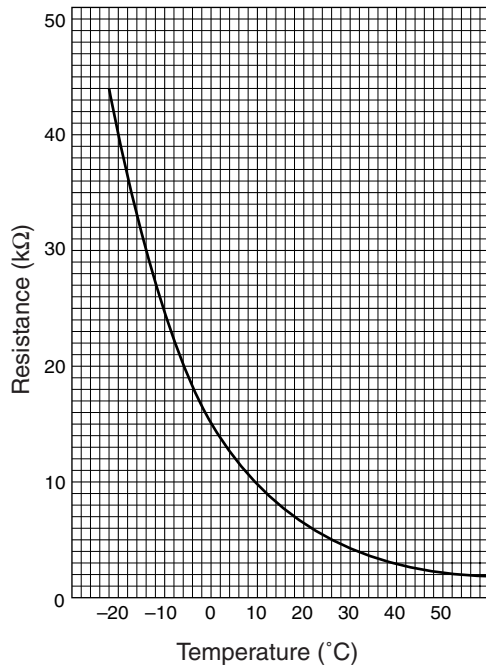


Thermistor $R_{120} = 7.465\text{k}\Omega \pm 2\%$ (TH1, 10)

$$R_t = 7.465 \exp \left\{ 4057 \left(\frac{1}{273+t} - \frac{1}{273+120} \right) \right\}$$

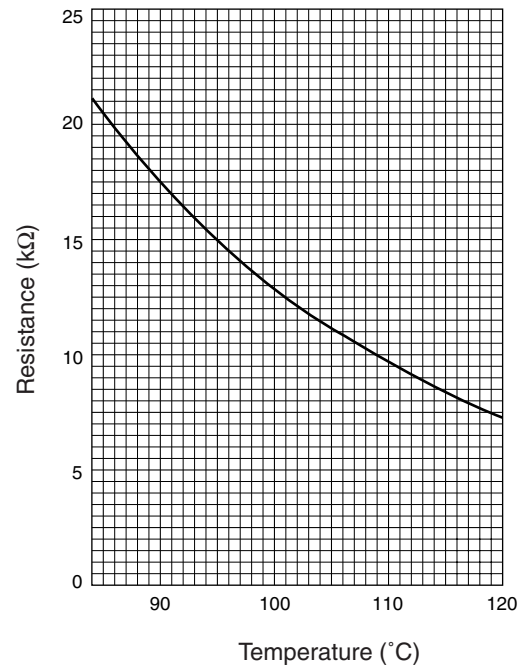


Thermistor $R_0 = 33\text{k}\Omega \pm 1\%$ (TH2)

$$R_t = 33 \exp \left\{ 3965 \left(\frac{1}{273+t} - \frac{1}{273+0} \right) \right\}$$

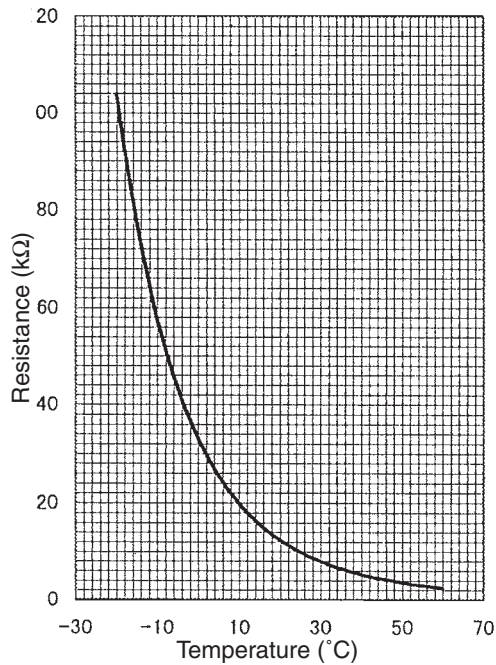

Thermistor $R_{50} = 17\text{k}\Omega \pm 2\%$ (THHS)

$$R_t = 17 \exp \left\{ 4170 \left(\frac{1}{273+t} - \frac{1}{273+50} \right) \right\}$$

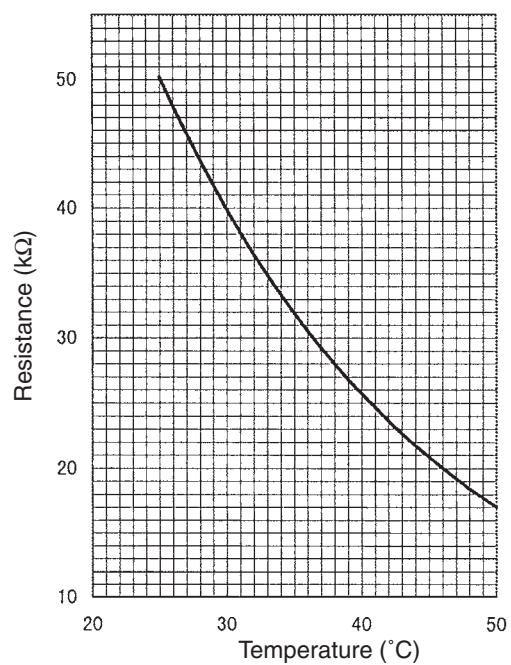

6 REFRIGERANT AMOUNT ADJUSTMENT

Clarify relationship between the refrigerant amount and operating characteristics of CITY MULTI, and perform service activities such as decision and adjustment of refrigerant amount on the market.

[1] Refrigerant Amount and Operating Characteristics

The followings are refrigerant amount and operating characteristics which draw special attention.

1	During cooling operations, required refrigerant amount tends to increase (refrigerant in accumulator decreases) in proportion to increase in the number of operating indoor units. However, the change of increase rate is small.		
2	During heating operations, liquid level of accumulator is the highest when all the indoor units are operating.		
3	Discharge temperature hardly changes when increasing or decreasing refrigerant amount with accumulator filled with refrigerant.		
4	Tendency of discharge temperature	During cooling operations, discharge temperature tends to rise at overload than low temperature. ----- During heating operations, discharge temperature tends to rise at low temperature than overload. ----- The lower operating frequency is, the higher discharge temperature tends to become of deteriorated compressor efficiency.	Comparison including control system
5	Compressor shell temperature is 20~70 degrees higher than low pressure saturation temperature (Te) when refrigerant amount is appropriate. → Judged as over replenishment when temperature difference from low pressure saturation temperature (Te) is 10 degrees or less.		

[2] Adjustment and Judgement of Refrigerant Amount

(1) Symptom

The symptoms shown in the table below are the signs of excess or lack of refrigerant amount. Be sure to adjust refrigerant amount in refrigerant amount adjustment mode, by checking operation status, judging refrigerant amount, and performing selfdiagnosis with LED, for overall judgement of excess or lack of refrigerant amount.

1	Emergency stop at 1500 remote controller display (excessive refrigerant replenishment)	Excessive refrigerant replenishment
2	Operating frequency does not fully increase, thus resulting in insufficient capacity	Insufficient refrigerant replenishment
3	Emergency stop at 1102 remote controller display (discharge temperature trouble)	
4	Emergency stop occurs when the remote control display is at 1501. (insufficient refrigerant)	Insufficient refrigerant

(2) Refrigerant amount

① Checking the operating condition

Operate all the indoor units on cooling or on heating, checking the discharge temperature, sub-cooling (BC controller), low pressure saturation temperature, inlet temperature, shell bottom temperature, liquid level, liquid step, etc. and rendering an overall judgment.


Note :

Depending on the operating state, AL = 0 has the meaning does not mean that there is insufficient refrigerant.

Condition		Judgement
1	Outlet temperature is high. (110°C or higher)	Refrigerant volume tends toward insufficient.
2	Low pressure saturation temperature is extremely low.	
3	Inlet superheating is high (if normal, SH = 20 deg or lower).	
4	Shell bottom temperature is high (the difference with the low pressure saturation temperature is 70 deg. or greater)	
5	Shell temperature is low (the difference with the low pressure saturation temperature is 10 deg. or lower).	Refrigerant volume tends toward overcharge.
6	Liquid level AL = 2	

② Cautions when judging the liquid level

If you are judging the liquid level, be sure to use it only after making sure the liquid level sensor function (sensor and heater) is operating normally.

Check Items		Judgment
1	Liquid Heater Disconnection Check	Normal if the resistance is $2\text{ k}\Omega \pm 5\%$.
2	Liquid Heater Output Check Turn 1 ON on the self-diagnosis switch (SW1) ON  , and output the signal for the heater relay to LED 7, then check the voltage of the heater terminal (AC 198~264 V) (leave the heater connections as they are).	Normal if AC 198~264 V is output together with the LED lighting.
3	Inlet superheating is high (if normal, SH = 20 deg or lower).	

③ Check the refrigerant volume by self-diagnosis using the LED.

Set the self-diagnosis switch (SW1) as shown below and check the past information (history) concerning the refrigerant volume.

Set SW1 as shown in the figure at right. ON 

If LD8 lights up, it indicates the refrigerant charge abnormal delay state just before emergency stop due to refrigerant overcharge (1500).

④ Additional refrigerant charge volume

At the time of shipping from the factory, the heat source unit is charged with the amount of coolant shown in the following table, but since no extension piping is included, please carry out additional charging on-site.

Heat source unit model name	PQRY-P200YMF-B	PQRY-P250YMF-B
Refrigerant charge volume	7.5kg	8.5 kg

Calculation formula

Calculate the additional refrigerant volume by calculating the size of the extension liquid piping and its length (units: m).

$$\text{Additional refrigerant volume (kg)} = (0.12 \times L1) + (0.06 \times L2) + (0.024 \times L3) + \alpha$$

L1: Length of $\phi 12.7$ liquid pipe (m)

L2: Length of $\phi 9.52$ liquid pipe (m)

L3: Length of $\phi 6.35$ liquid pipe (m)

α : refer to the calculation table.

In the calculation results, round up fractions smaller than 0.01 kg. (Example: 18.54 kg \rightarrow 18.6 kg)

(α Calculation Table)

Total capacity of Connected indoor units		α
P200	P250	
100~160	125~160	1.5
161~300	161~375	2.0

⚠ Caution :

When charging with refrigerant, be sure to charge from the liquid side. If charging from the gas side, it will cause the refrigerant composition to change inside the unit and the composition of the refrigerant remaining in the canister will also change.

(3) Refrigerant amount adjustment mode operations


1) Procedure

Follow the procedure shown below when needs to additionally replenish or discharge refrigerant arises depending on operation status.

When turning on function select switch (SW2-4) on heat source unit control circuit board, mode is changed to refrigerant amount adjustment mode followed by the operations shown in the table below.

Operations	①	During cooling-only operations only, LEV3 of BC controller is set at fixed opening, with heat source unit heat exchanger fully operated (SV3-5, SV71 open, SV6, SV72, SV73 close).
	②	During heating-only operations (or cooling/heating mixed operations), normal operation is observed.

In addition when setting selfdiagnosis switch (SW1) on control circuit board of heat source unit to

ON  liquid level of accumulator is shown by position of LED light-up.

When LED1 lights up → AL = 0 (No liquid in accumulator)
 When LED2 lights up → AL = 1 (Liquid in accumulator)
 When LED3 lights up → AL = 2 (Overcharge)

Note 1: Though AL=1 is shown for a while after starting operations in refrigerant amount adjustment mode, it sometimes changes to AL=0 as time goes by (when refrigerant system becomes stable).

① In the case of genuine AL=1

In case AL=1, subcool of BC controller is 5 degrees or more, and SH of all indoor units are within 5-9 degrees.

② In case the present AL=1 status will possibly change to AL=0


In case subcool of BC controller is 5 degrees or less, or SH of at least one indoor units 5 degrees or less.

2: Refrigerant amount adjustment in cooling mode can not be performed when high pressure is 14kg/cm²G (1.37MPa) or more. In this case, perform the adjustment in heating mode.

Countermeasure	A	In the case of cooling-only operations in refrigerant amount adjustment mode, if the above ② is applicable, judge accumulator level (AL) after subcool of BC controller reaches 5 deg or more, and SH of all indoor units becomes 5~7 degrees.
	B	Monitor subcool of BC controller at LED light-up position, by turning on selfdiagnosis switch of heat source unit (SW1-1, 2, 4, 8)
	C	Monitor SH of indoor unit at LED light-up position, by turning on <u>No. 1 unit SW1</u> -5, 6, 8 <u>No. 2 unit SW1</u> -1, 5, 6, 7 and <u>No. 3 unit SW1</u> -2, 5, 6, 8 <u>No. 4 Unit SW1</u> -1, 2, 5, 6, 8 <u>No. 5 unit SW1</u> -3, 5, 6, 8 <u>No. 6 unit SW1</u> -1, 3, 5, 6, 8, <u>No. 7 unit SW1</u> -1, 2, 3, 5, 6, 8, <u>No. 8 unit SW1</u> -4, 5, 6, 8 <u>No. 9 unit SW1</u> -1, 4, 5, 6, 8, <u>No. 10 unit SW1</u> -2, 4, 5, 6, and 8.

2) Refrigerant adjustment in cooling season

1 Flow chart

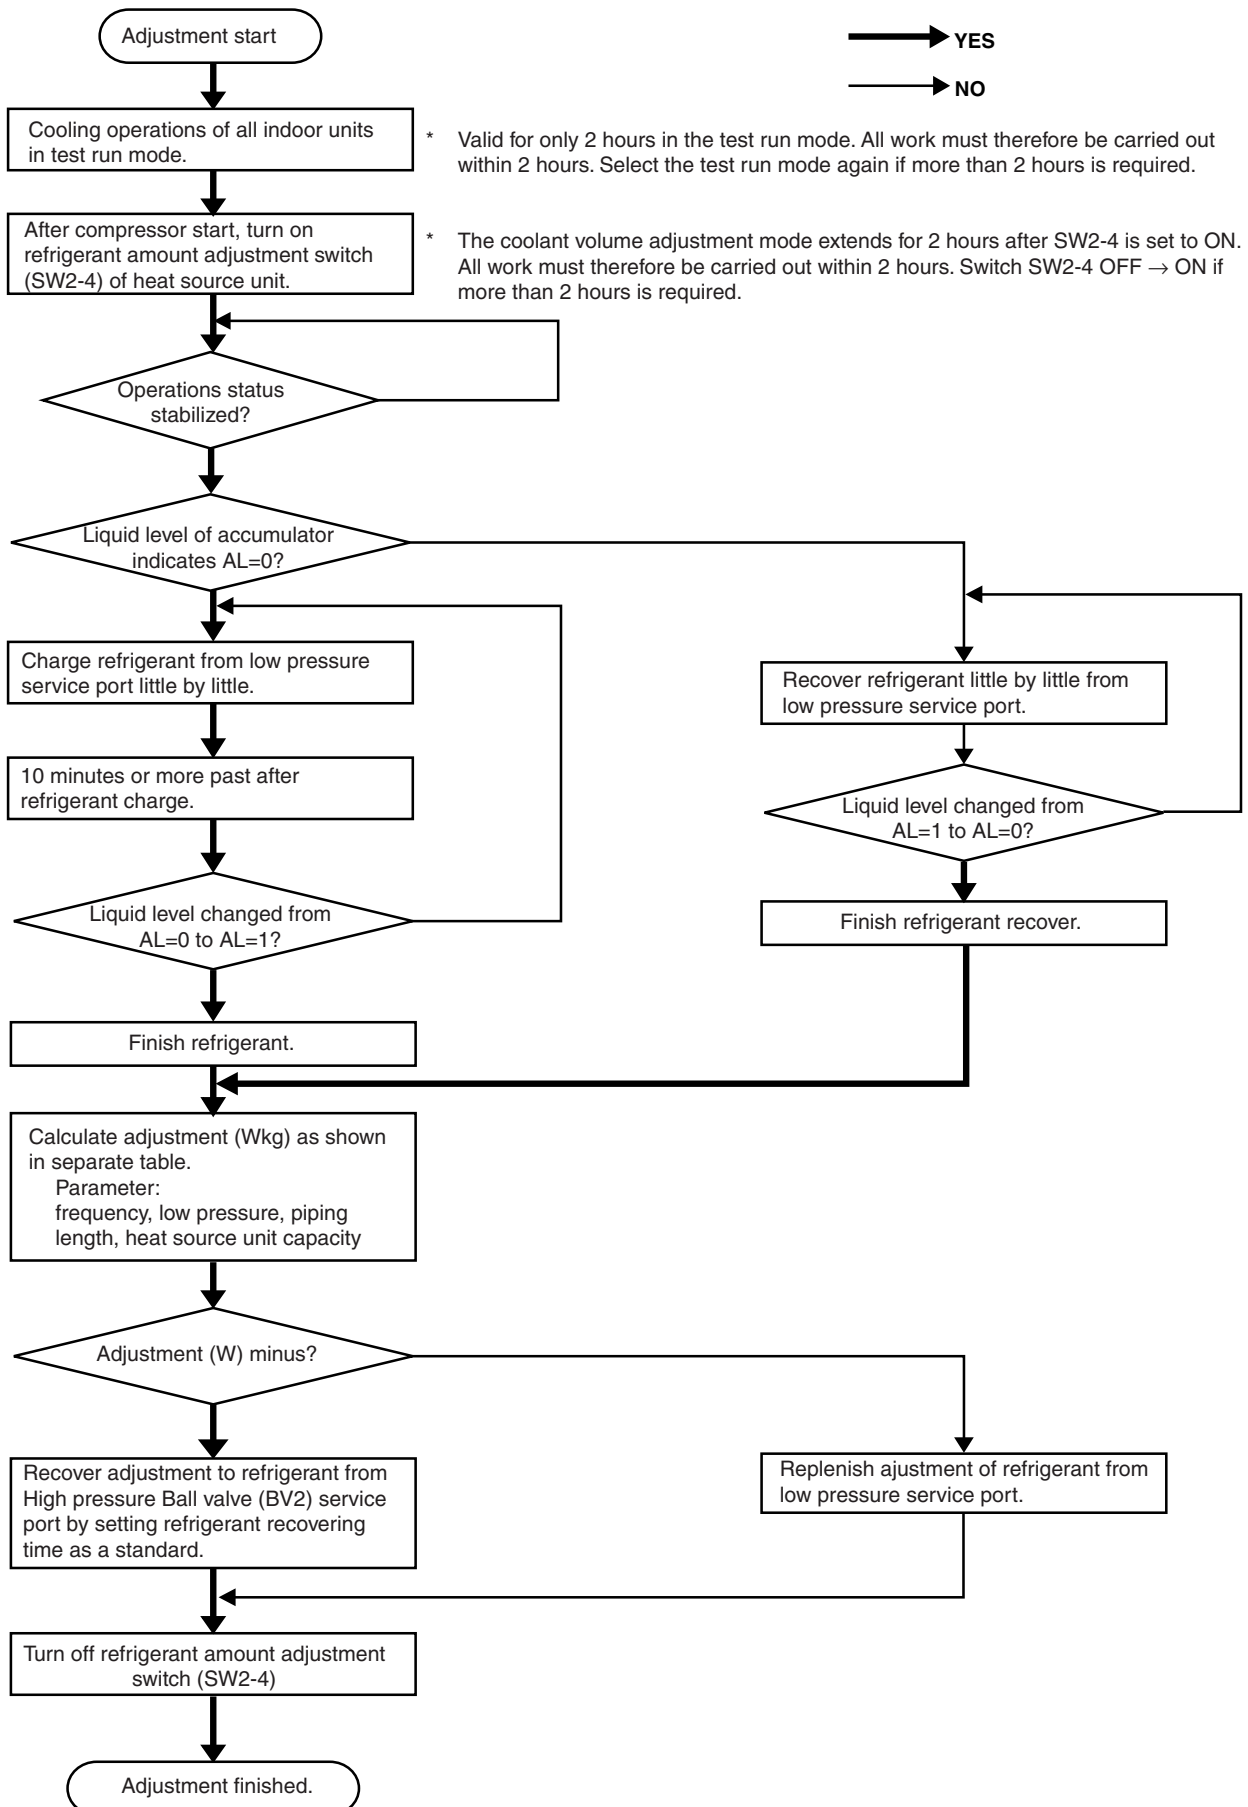

② Additional replenishment amount and discharge amount of refrigerant

Table-1 PQRYP250YMF-B (In case total capacity code is 40 or more and displayed compressor frequency is 97Hz or less)

Compressor frequency (Hz)	63~69	70~76	77~83	84~98
Adjustment W(kg)	+9	+8	+7	+6

Table-2 PQRYP250YMF-B (In case total capacity code is 40 or more and displayed compressor frequency is 98Hz)

Low pressure (kg/cm ² G) (MPa)	3.8~4.5 (0.37~0.44)	4.5~5.0 (0.44~0.49)	5.0~5.5 (0.49~0.54)	5.5 or more (0.54)
Adjustment W(kg)	+6	+5	+4	+3

Table-3 PQRYP250YMF-B (In case total capacity code is 40 or less and displayed frequency is 97Hz or less)

Compressor frequency (Hz)	42~48	49~55	56~62	63~69	70~76	77~83	84~97
Extended piping length (m) (φ19.05)							
10m or less	+13	+11	+9	+7	+5	+4	+4
10~50m						+3	+2
50m or more						+3	0

Table-4 PQRYP250YMF-B (In case total capacity code is 40 or less and displayed compressor frequency is 95Hz)

Low pressure (kg/cm ² G) (MPa)	3.8~4.5 (0.37~0.44)	4.5 or more (0.44)
Extended piping length (m) (φ19.05)		
10m or less	+4	+4
10~50m	+1	+1
50m or more	-5	-7

Table-5 PQRYP200YMF-B (In case total capacity code is 40 or more and displayed compressor frequency is 74Hz or less)

Compressor frequency (Hz)	55~60	61~66	67~74
Adjustment W(kg)	+13	+11	+9

Table-6 PQRYP200YMF-B (In case total capacity code is 40 or more and displayed compressor frequency is 75Hz or more)


Low pressure (kg/cm ² G) (MPa)	3.8~4.5 (0.37~0.44)	4.5~5.0 (0.44~0.49)	5.0~5.5 (0.49~0.54)	5.5~6.0 (0.54~0.59)	6.0 or more (0.59)
Adjustment W(kg)	+7	+5	+3	+2	+1

Table-7 PQRYP200YMF-B (In case total capacity code is 40 or less and displayed compressor frequency is 74Hz or less)

Compressor frequency (Hz)	39~43	44~49	50~54	55~60	61~66	67~74
Adjustment W(kg)	+13	+12	+11	+10	+9	+8

Table-8 PQRYP200YMF-B (In case total capacity code is 40 or less and displayed compressor frequency is 75Hz)

Low pressure (kg/cm ² G) (MPa)	3.8~4.5 (0.37~0.44)	4.5~5.0 (0.44~0.49)	5.0~5.5 (0.49~0.54)	5.5 or more (0.54)
Adjustment W(kg)	+6	+5	+3	+2

Note: Check displayed frequency with LED by setting selfdiagnosis switch (SW1) to ON 

③ Time required for recovering refrigerant from low pressure service port (minute)

Refrigerant amount to be drawn out (kg)	Low pressure (kg/cm ² G) (MPa)	3.5~4.5 (0.34~0.44)	4.5~5.5 (0.44~0.54)	5.5 ~ 7.5 (0.54~0.74)
1		4.0	3.5	3.5
2		8.0	7.0	6.5
3		12.0	10.5	10.0
4		16.0	14.0	13.0
5		20.0	18.0	16.5
6		24.0	21.5	19.5
7		28.0	25.0	23.0
8		32.0	28.5	26.0
9		36.0	32.0	29.5
10		40.0	35.5	32.5
11		44.0	39.0	36.0


④ Additional evacuation, refrigerant replacement, and refrigerant replacement

WR2 series has unique refrigerant circuit structure which makes possible 2-pipe cooling-heating simultaneous operations. Therefore, in the case of total replacement or replenishment of refrigerant in this system, the following evacuation and refrigerant replenishment procedures are required.

- ① Perform evacuation by connecting to system analyzer joint of service port of high pressure ball valve and high pressure charge plug, and joint of service port of low pressure ball valve and low pressure charge plug.
- ② Perform refrigerant charge from low pressure circuit only, after finishing evacuation, closing vacuum pump valve, shutting off high pressure circuit of system analyzer, and opening valve of refrigerant cylinder.
(In case service port of ball valve and charge plug can not be jointed as shown in the figure, use two vacuum pumps and evacuate high pressure side and low pressure side circuits separately.)

Note 1: Though refrigerant gas itself is harmless, airtight room should be opened before gas release for preventing oxygen shortage.

2: When releasing gas, use blotting paper, etc. so that oil spouted with the gas does not spread out.

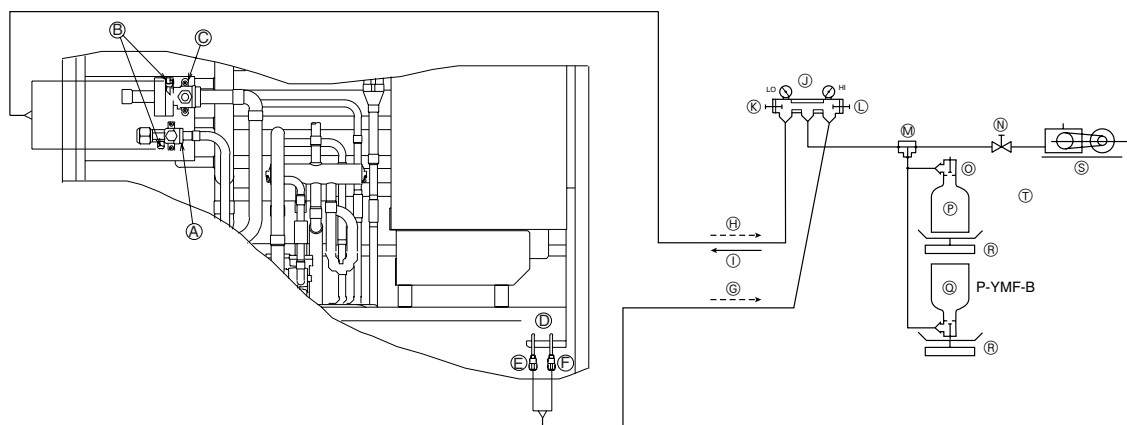


- Ⓐ Ball valve of the high pressure side
- Ⓑ Service port
- Ⓒ Ball valve of the low pressure side
- Ⓓ Charge plug
- Ⓔ High pressure
- Ⓕ Low pressure
- Ⓖ Evacuation
- Ⓗ Evacuation
- Ⓘ Replenish of refrigerant
- Ⓙ System analyzer
- Ⓚ Lo knob
- Ⓛ Hi knob
- Ⓜ 3-way joint

- Ⓝ Valve
- Ⓞ Valve
- Ⓟ Flon 22 cylinder
- Ⓠ R407C cylinder
- Ⓡ Scale
- Ⓢ Vacuum pump
- Ⓣ P-YMF-B : Use a vacuum pump with a reverse flow check valve
- Ⓤ A high-precision gravimeter measurable up to 0.1kg should be used. If you are unable to prepare such a high-precision gravimeter, you may use a charge cylinder.

1 Flow chart



Note :

1. Be sure to operate all indoor units because refrigerant is accumulated in stopped unit. Change mode to test run mode for preventing stabilized operations from being disturbed by turning thermostat.
2. • Judge operation status as “stable” when high pressure is stabilized.
• Judge “stable” or “unstable” 3 minutes after starting compressor.
3. When turning on SW1 to ON  , LED displays liquid level as follows.

When LED 1 lights up	→	AL=0
When LED 2 lights up	→	AL=1
When LED 3 lights up	→	AL=2

4. In the case of AL=1, adjustment is not required in principle. However, if liquid level is on the lower side, adjustment is required for fear of refrigerant shortage because refrigerant is accumulated in stopped unit at the time on one-unit operations.
5. Calculate difference of required refrigerant amounts between cooling and heating operations.
 - ① In case refrigerant piping length is roughly known
Replenish refrigerant observing the table below.
The total. length is that converted to $\phi 19.05$ liquid pipe size.

Piping length (m) \ High pressure (kg/cm ² G) (MPa)	15 or less (1.47)	15~17 (1.47~1.67)	17 or more (1.67)
60m or less	10kg	5kg	2kg
60~90m	11kg	6kg	3kg
90m or more	12kg	7kg	4kg

Liquid pipe size $\phi 12.7$	→	Actual length × 0.75
Liquid pipe size $\phi 9.52$	→	Actual length × 0.375
Liquid pipe size $\phi 6.35$	→	Actual length × 0.15

- ② In case refrigerant piping length is not known
Additionally charge 10kg refrigerant.

6. When turning on SW, LED shows liquid level displayed mode. ON 

When LED 1 lights up	→	AL=0
When LED 2 lights up	→	AL=1
When LED 3 lights up	→	AL=2

7. When ⑦~⑫ adjustments has been done without fail, AL=2 is not indicated even though maximum amount of refrigerant is charged at ⑬. Therefore, when AL=2 is displayed, excessive replenishment at ⑦ and ⑨, or calculation mistaken in ⑬ are judged as the cause.


7 TROUBLESHOOTING

[1] Principal Parts

Pressure sensor

(1) Judging failure

- 1) Check for failure by comparing the sensing pressure according to the high pressure/low pressure pressure sensor and the pressure gauge pressure.
Turn on switches 1, 3, 5, 6 (High) and 2, 4, 5, 6 (Low) of the digital display select switch (SW1) as shown below, and the sensor pressure of the high pressure/low pressure sensors is displayed digitally by the light emitting diode LD1.

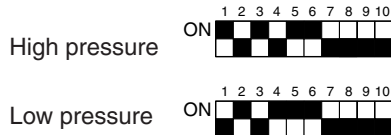


- 1 In the stopped condition, compare the pressure readings from the gauge and from the LD1 display.
 - (a) If the gauge pressure is 0~1 kg/cm²G (0.098MPa), the internal pressure is dropping due to gas leakage.
 - (b) If the pressure according to the LD1 display is 0~1 kg/cm²G (0.098MPa), there is faulty contact at the connector, or it is disconnected. Proceed to 4.
 - (c) If the pressure according to the LD1 display is 32 kg/cm²G (3.14MPa) or higher, proceed to 3.
 - (d) If other than (a), (b) or (c), compare the pressure readings during operation. Proceed to 2.
- 2 Compare the pressure readings from the gauge and from the LD1 display while in the running condition.
 - (a) If the difference between the two pressures is within 1 kg/cm²G (0.098MPa), both the affected pressure sensor and the main MAIN board are normal.
 - (b) If the difference between the two pressures exceeds 1 kg/cm²G (0.098MPa), the affected pressure sensor is faulty (deteriorating performance).
 - (c) If the pressure reading in the LD1 display does not change, the affected pressure sensor is faulty.
- 3 Disconnect the pressure sensor from the MAIN board and check the pressure according to the LD1 display.
 - (a) If the pressure is 0~1 kg/cm²G (0.098MPa) on the LD1 display, the affected pressure sensor is faulty.
 - (b) If the pressure is 32 kg/cm²G (3.14MPa) (in the case of the low pressure sensor, 10 kg/cm²G (0.98MPa)) or higher, the MAIN board is faulty.
- 4 Disconnect the pressure sensor from the MAIN board and short out the No. 2 and No. 3 pins of the connector (63HS, 63LS), then check the pressure by the LD1 display.
 - (a) If the pressure according to the LD1 display is 32 kg/cm²G (3.14MPa) (in the case of the low pressure sensor, 10 kg/cm²G (0.98MPa)) or higher, the affected pressure sensor is faulty.
 - (b) If other than (a), the MAIN board is faulty.

2) Pressure sensor configuration.

The pressure sensors are configured in the circuit shown in the figure at right. If DC 5 V is applied between the red and black wires, a voltage corresponding to the voltage between the white and black wires is output and this voltage is picked up by the microcomputer. Output voltages are as shown below.

High pressure 0.1 V per 1 kg/cm²G (0.098MPa)
 Low pressure 0.3 V per 1 kg/cm²G (0.098MPa)

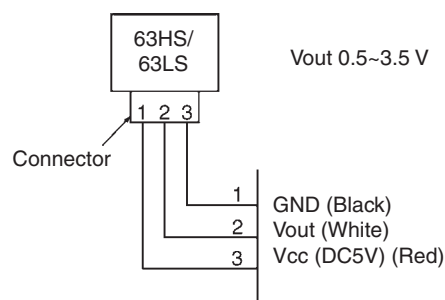

* Connector connection specifications on the pressure sensor body side.

The connector's pin numbers on the pressure sensor body side differ from the pin numbers on the main circuit board side.



	Sensor body side	MAIN board side
Vcc	Pin 1	Pin 3
Vout	Pin 2	Pin 2
GND	Pin 3	Pin 1

Solenoid valve (SV1~6, SV71~73)

Check if the control board's output signals and the operation of the solenoid valves match.

Setting the self-diagnosis switch (SW1) as shown in the figure below causes the ON signal of each relay to be output to the LED's.

Each LED shows whether the relays for the following parts are ON or OFF. When a LED lights up, it indicates that the relay is ON.

SW1	LED							
	1	2	3	4	5	6	7	8
				SV1	SV2	SV3	SV4	
	SV5	SV6	SV71	SV72	SV73			

1) In the case of SV1 (Bypass Valve)

- When the compressor starts, SV1 is ON for 4 minutes, so check operation by whether the solenoid valve is emitting an operating noise.
- Changes in the operating condition by solenoid valve operation can be confirmed by the temperature of the bypass circuit and the sound of the refrigerant.







2) In the case of SV2 (Bypass)

- SV2 goes ON in accordance with the rise in the high pressure in the cooling mode and heating mode, so check its operation by the LED display and the operating noise emitted by the solenoid valve.
(Conditions during operation: See **Control of Heat Source Unit.**)
- Changes in the operating condition by solenoid valve operation can be confirmed by the temperature of the bypass circuit and the sound of the refrigerant.

3) SV3~6, SV71~73 (Control of heat exchanger capacity)

- Operations can be confirmed by LED display and operating sound of solenoid valve, because one or more of SV3~5, SV71 are turned on depending on conditions during cooling-only operations.
- Operation can be confirmed by LED display and operating sound of solenoid valve, because all of SV3~5, SV73 are turned on during heating-only operations.
- Operations can be confirmed by LED display and operating sound of solenoid valve, because one or more of SV3~6, SV71~73 are turned on depending on conditions during cooling-principal and heating-principal operations.

- (d) The refrigerant flow is as following figure. Hot gas (high pressured) flows in cooling mode and cool gas/liquid (low pressured) flows in heating mode. Please refer to the Refrigerant Circuit Diagram.
- And, ON/OFF of Solenoid valve is depends on the amount of running indoor units, ambient temperature and so on. So please check by LED Monitor Display.
- The SV coil is taken off, then it is possible to open caps and check plungers. But the special tool which is on the Service Parts List is needed.

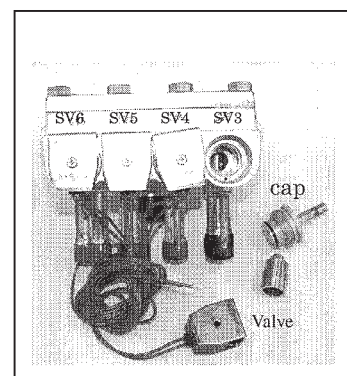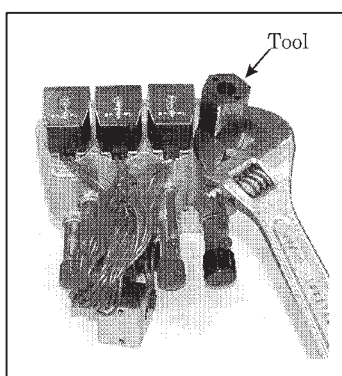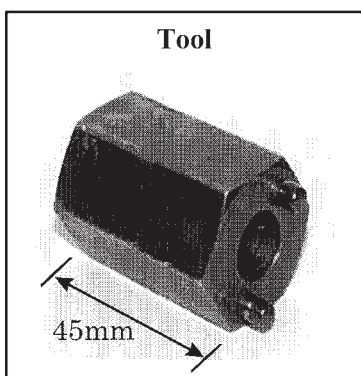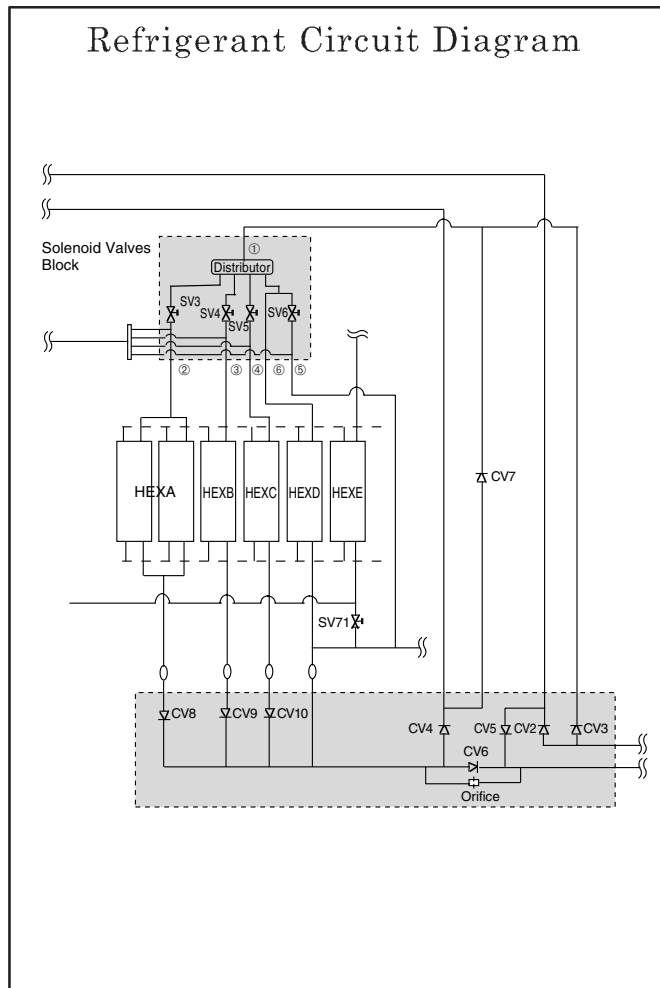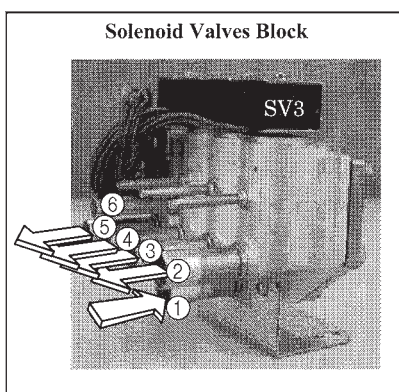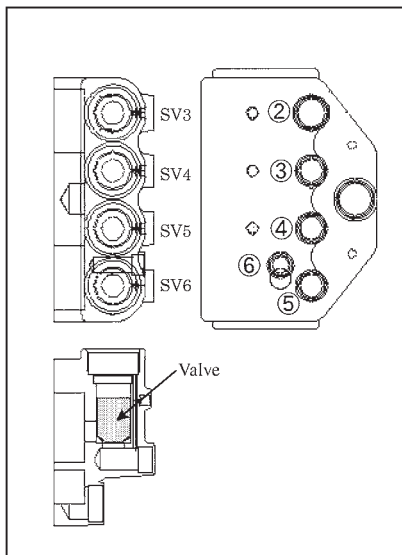


* Closed torque : 13kg·m (1.3N·m)

LEV for heat source unit

The valve opening angle changes in proportion to the number of pulses.

(Connections between the heat source unit's MAIN board and SLEV, LEV2)

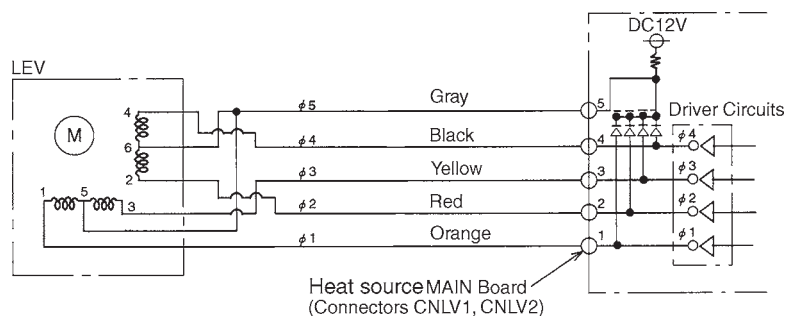

Pulse signal output and valve operation

Output (phase)	Output states							
	1	2	3	4	5	6	7	8
φ1	ON	OFF	OFF	OFF	OFF	OFF	ON	ON
φ2	ON	ON	ON	OFF	OFF	OFF	OFF	OFF
φ3	OFF	OFF	ON	ON	ON	OFF	OFF	OFF
φ4	OFF	OFF	OFF	OFF	ON	ON	ON	OFF


Output pulses change in the following orders when the

Valve is Closed 1→2→3→4→5→6→7→8→1

Valve is Open 8→7→6→5→4→3→2→1→8

- * 1. When the LEV opening angle does not change, all the output phases are off.
- 2. When the output is out of phase or remains ON continuously, the motor cannot run smoothly, but move jerkily and vibrates.

LEV valve closing and valve opening operations

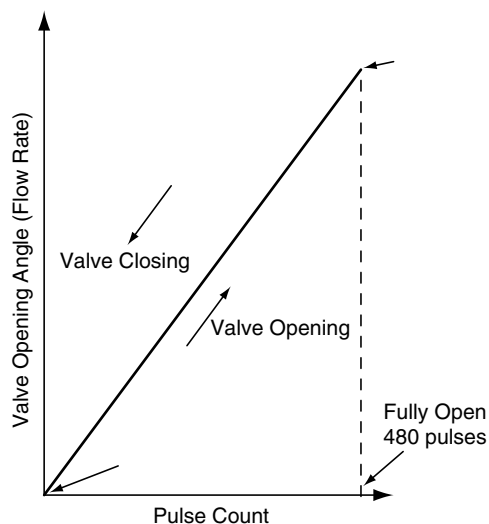


- * When the power is switched ON, a 520 pulse valve opening signal is output to make sure the valve's position, so that it is definitely at point A. (The pulse signal is output for approximately 17 seconds.)
- * When the valve operates smoothly, there is no sound from the LEV and no vibration occurs, but when the valve is locked, it emits a noise.
- * Whether a sound is being emitted or not can be determined by holding a screwdriver, etc. against it, then placing your ear against the handle.
- * If there is liquid refrigerant inside the LEV, the sound may become lower.

LEV for BC controller and indoor unit

- ① LEV receives pulse signal from microcomputer, and operates valve with stepping motor.
- ② Valve opening changes in proportion to the number of pulses.

Connection of microcomputer circuit board and LEV

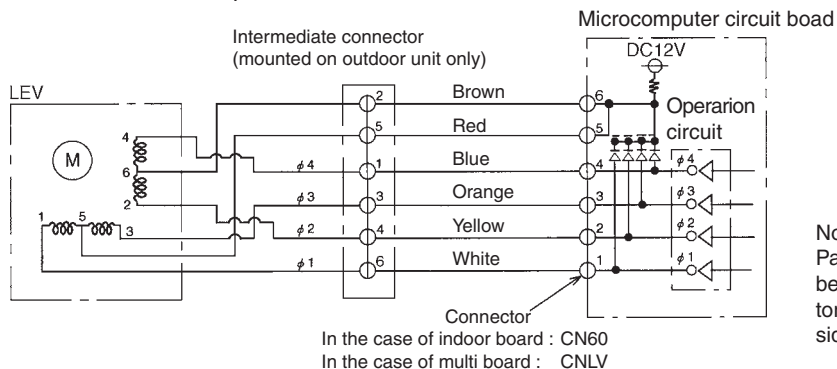

Note:


Pay attention to colors of lead wires because numbers of intermediate connectors are different from those of circuit board side connectors.

Pulse signal output and valve operations

Output (phase) No.	Output states			
	1	2	3	4
$\phi 1$	ON	OFF	OFF	ON
$\phi 2$	ON	ON	OFF	OFF
$\phi 3$	OFF	ON	ON	OFF
$\phi 4$	OFF	OFF	ON	ON

- ① Valve open : Output pulse changes in order of 1→2→3→4→1.
Valve close : Output pulse changes in order of 4→3→2→1→4.
- ② All output phases are turned OFF when LEV opening does not change.
- ③ In case output phase is lacking or kept "ON," motor can not rotate smoothly, generating ticking sound and vibration.

Closing and opening operations of valve

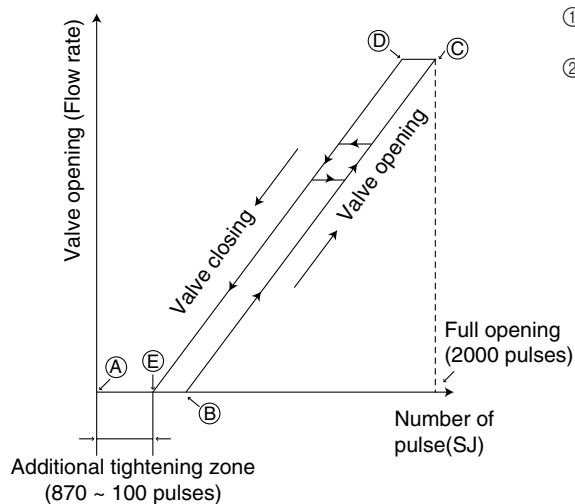

- ① When turning on power source, issue valve closing signal of 2,200 pulses, so that valve opening is located at point (A).
- ② When valve runs smoothly, no sound or vibration is generated from LEV. However, big sound is observed when valve opening changes from point (E) to (A) or valve is locked.
(Sound generation can be identified from the bundle of screwdriver attached to the valve.)

Judgment methods and likely failure mode


Caution:

The specifications of the heat source unit (heat source LEV) and indoor unit (indoor LEV) differ. For this reason, there are cases where the treatment contents differ, so follow the treatment specified for the appropriate LEV as indicated in the right column.

Failure Mode	Judgment Method	Treatment	Affected LEV
Microcomputer driver circuit failure	<p>① Disconnect the control board connector and connect the check LED as shown in the figure below.</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Indoor, BC controller</p> <p>1kΩ LED</p> </div> <div style="text-align: center;"> <p>Heat source</p> <p>1kΩ LED</p> </div> </div> <p>When the base power supply is turned on, the indoor LEV outputs pulse signals for 10 seconds, the heat source LEV outputs pulse signals for 17 seconds, and BC controller outputs pulse signals for 10-20 seconds. If the LED does not light up, or lights up and remains on, the driver circuit is abnormal.</p>	In the case of driver circuit failure, replace the control board.	Indoor BC controller Heat source
LEV mechanism is locked.	<p>① If the LEV is locked up, the drive motor turns with no load and a small clicking sound is generated. Generation of this sound when the LEV is fully closed or fully open is abnormal.</p>	Replace the LEV.	Indoor BC controller Heat source
The LEV motor coils have a disconnected wire or is shorted.	<p>Measure the resistance between the coils (red - white, red - orange, brown - yellow, brown - blue) using a tester. They are normal if the resistance is within $150\Omega \pm 10\%$.</p>	Replace the LEV coils.	Indoor BC controller
	<p>Measure the resistance between the coils (gray - orange, gray - red, gray - yellow, gray - black) using a tester. They are normal if the resistance is within $46\Omega \pm 3\%$.</p>	Replace the LEV coils.	Heat source
Fully closed failure (valve leaks)	<p>① If you are checking the indoor unit's LEV, operate the indoor unit's blower and the other indoor units in the cooling mode, then check the piping temperatures (liquid pipe temperatures) of the indoor units by the operation monitor through the heat source unit's control board. When the fan is running, the linear expansion valve is fully closed, so if there is leakage, the temperature sensed by the thermistor (liquid pipe temperature sensor) will become low. If the temperature is considerably low compared to the remote control's intake temperature display, it can be judged that there is a fully closed failure. In the case of minimal leakage, it is not necessary to replace the LEV if there are no other effects.</p> <div style="display: flex; align-items: center;"> <div style="margin-left: 10px;"> <p>Thermistor liquid pipe (temperature sensor)</p> <p>Linear Expansion Valve</p> </div> </div>	If there is a large amount of leakage, replace the LEV.	Indoor BC controller
Faulty wire connections in the connector or faulty contact.	<p>① Check for pins not fully inserted on the connector and check the colors of the lead wires visually.</p> <p>② Disconnect the control board's connector and conduct a continuity check using a tester.</p>	Check the continuity at the places where trouble is found.	Indoor BC controller Heat source

Heat source LEV (SLEV) coil removal procedure (configuration)


As shown in the figure, the heat source LEV is made in such a way that the coils and the body can be separated.

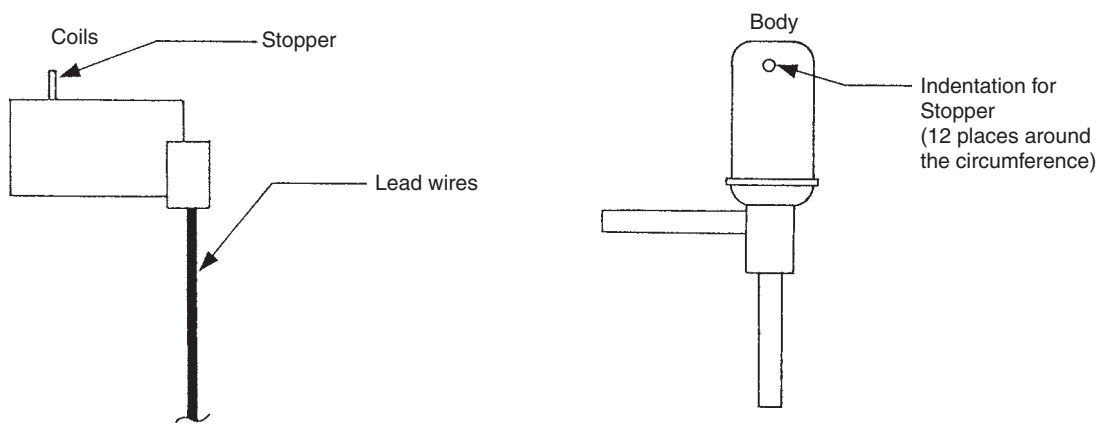

<Removing the coils>


Fasten the body tightly at the bottom (Part A in the figure) so that the body will not move, then pull out the coils toward the top. If they catch on the stopper and are difficult to take out, turn the coils left and right until the stoppers are free from the stopper indentations, then pull the coils out.

If you take out the coils only without gripping the body, undue force will be applied to the piping and the pipe may be bent over, so be sure to fasten the body in such a way that it will not move.

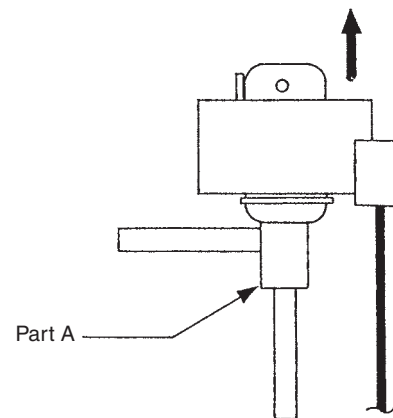

<Installing the coils>

Fasten the body tightly at the bottom (Part A in the figure) so that the body will not move, then insert the coils from the top, inserting the coils' stopper securely in one of the indentations on the body. (There are four indentations for the stopper on the body around its circumference, and it doesn't matter which indentation is used. However, be careful not to apply undue force to the lead wires or twist them around inside the body.) If the coils are inserted without gripping the body, it may exert undue force on the piping, causing it to become bent, so be sure to hold the body firmly so that it won't move when installing the coils.


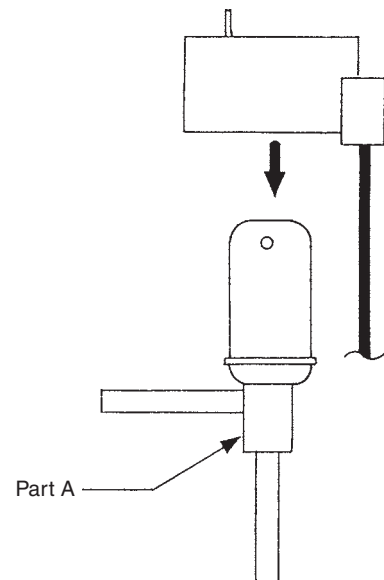


Check valves block (PURY-P200-250YMF-B)





The refrigerant flow in the pipe ⑥, ⑦, ⑧ and ⑨ are depend on ON/OFF of the SV3, 4, 5 and 6.

Please confirm by LED monitor display.

You can open the cap of valve A, B and C, but 3 types of hexagon socket screw keys. The size is as follows.

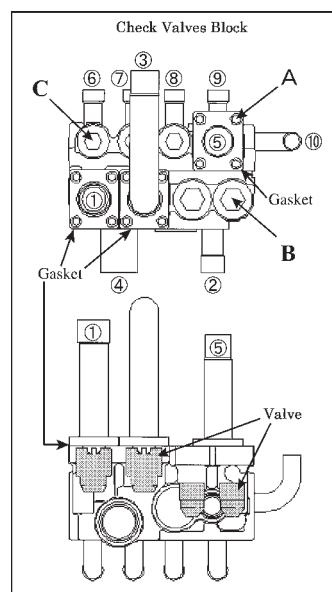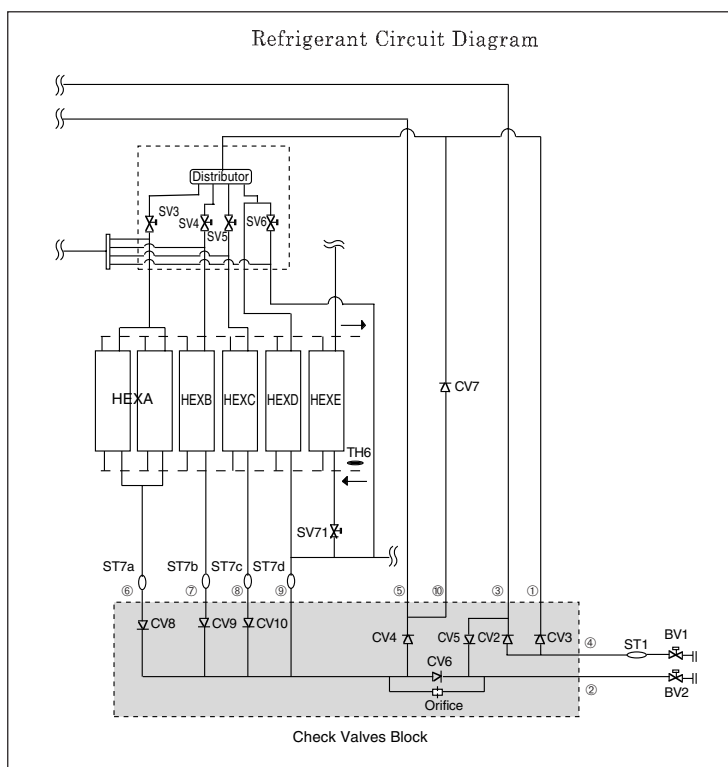

* Closed torque : A : 1.7kg·m (0.17N·m)
 B : 20kg·m (2.0N·m)
 C : 13kg·m (1.3N·m)

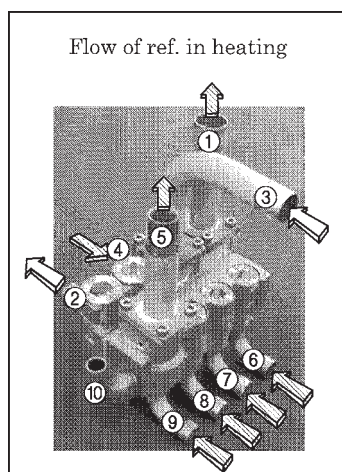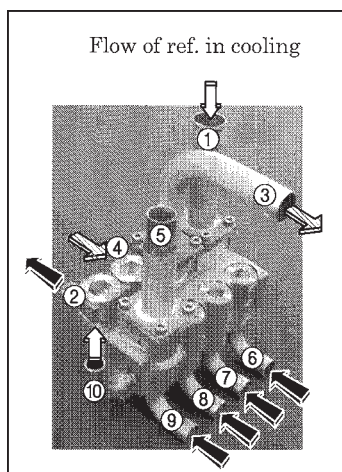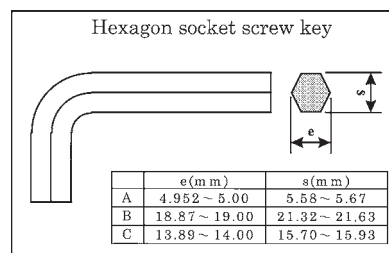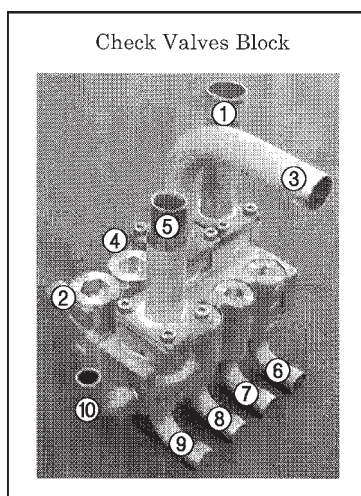




High pressure gas
 High pressure liquid
 Low pressure gas/liquid

Power transistor

Measure resistances between each terminal of transistor module with tester, and use the results for troubleshooting. Specified resistance value is dependent on tester type to be used for resistance measurement, because diode transistor has non-linearity, thus difference of impedance and voltage in tester being influential. As the internal impedance of resistance range of analog tester equals to the center value of meter indication, the affect of internal impedance can be minimized if the tester having close center value of resistance range. Because internal voltage is normally 1.5V, the tester to be used for troubleshooting of transistor module should satisfy the following conditions.

Internal voltage	1.5V (Power source : one dry cell battery)
Central value of resistance range	10 ~ 40Ω

The measured values for troubleshooting are shown in the table below.
(Use the minimum range for tester resistance range.)

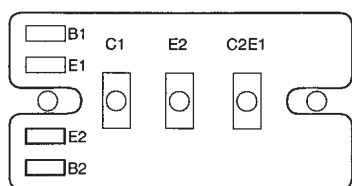
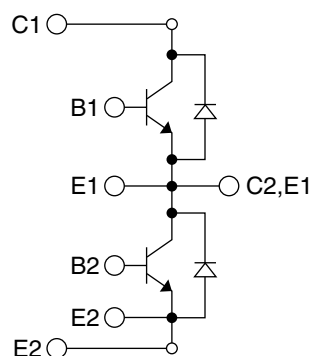


Transistor module has 6 circuits shown in the left.
(See figure below)

Tester ⊕ / Tester ⊖	C	B	E
C		∞	∞
B	2~100Ω		100~1500Ω
E	2~100Ω	100~1500Ω	

Diode stack

Perform continuity check with tester. Judged as normal if the following characteristics are observed.
(Use the minimum range for tester resistance range.)

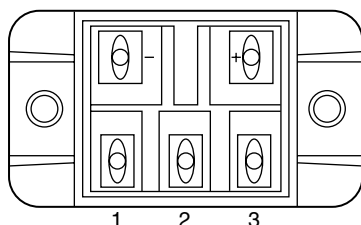


Tester ⊕ / Tester ⊖	+	-
1	10~50Ω	∞
2	10~50Ω	∞
3	10~50Ω	∞
Tester ⊖ / Tester ⊕	+	-
1	∞	10~50Ω
2	∞	10~50Ω
3	∞	10~50Ω

(5) Trouble and remedy of remote controller

Symptom	Cause	Checking method & countermeasure
1 Despite pressing of remote controller switch, operation does not start with no electronic sound. (No powering signal ◎ appears.)	1) M-NET transmission power source is not supplied from heat source unit. ① Main power source of heat source unit is not connected. ② Slipping off of connector on heat source unit circuit board. Main board : CNS1, CNVCC3 INV board : CNAC2, CNVCC1, CNL2 ③ Faulty power source circuit of heat source unit. • Faulty INV board, • Blown fuse (F1 on INV board) • Broken diode stack • Broken resistor (R1) for rush current protection 2) Short circuit of transmission line. 3) Erroneous wiring of M-NET transmission line at heat source unit. ① Transmission line disconnection or slipping off from terminal block. ② Erroneous connection of indoor/outdoor transmission line to TB7. 4) Slipping off of transmission wiring at remote controller. 5) Faulty remote controller.	a) Check transmission terminal block of remote controller for voltage. i) In case of 17 ~ 30V → Faulty network remote controller ii) In case of less than 17V → See "Transmission Power Circuit (30V) Check Procedure". <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> The cause of 2) and 3) is displayed with self-diagnosis LED for 7102 error. </div>
2 At about 10 seconds after turning remote controller operation switch ON, the display distinguishes and the operation stops.	1) Power source is not fed to indoor unit from transformer. ① Main power source of indoor unit is not turned on. ② Slipping off of connector (CND, CNT, CN3T) on indoor controller board. ③ Blown fuse on indoor controller board. ④ Faulty or disconnected transformer of indoor unit. ⑤ Faulty indoor controller board. 2) Faulty outdoor control circuit board or being out of control. As normal transmission is failed between indoor and heat source units, heat source unit model can not be recognized.	

Checking method & countermeasure

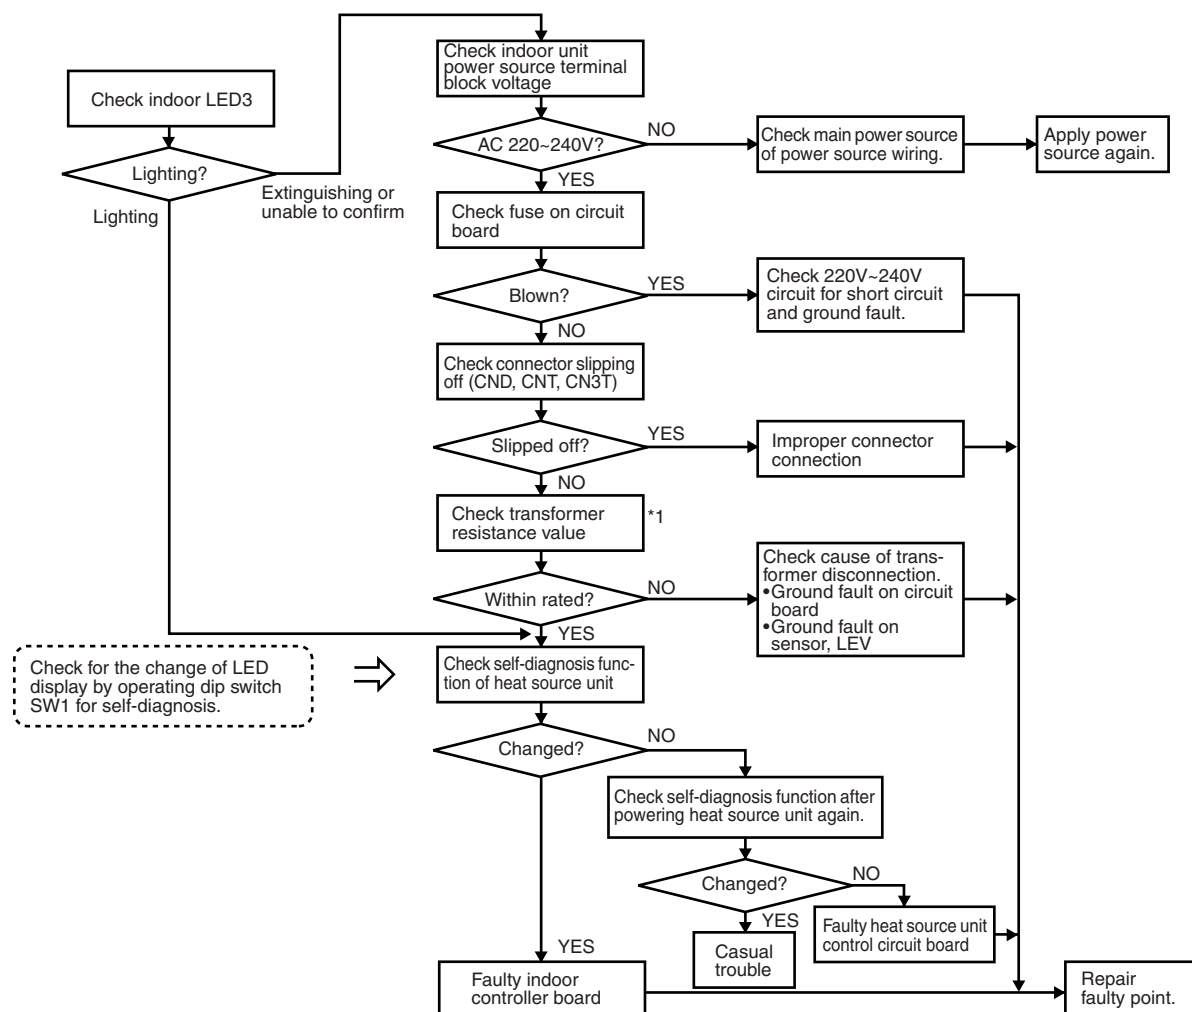


*1 Check the transformer in accordance with the "TROUBLE SHOOTING" in the indoor unit's service handbook.

	Symptom	Cause
3	"HO" display on remote controller does not disappear and switch is ineffective.	<p>(Without using MELANS)</p> <ol style="list-style-type: none"> Heat source unit address is set to "000." Erroneous address. <ol style="list-style-type: none"> Address setting miss of indoor unit to be coupled with remote controller. (Indoor unit = remote controller - 100.) Address setting miss of remote controller. (Remote controller = indoor unit + 100.) Faulty wiring of transmission terminal block TB5 of indoor unit in the same group with remote controller. Centralized control SW2-1 of heat source unit is turned ON. Setting to interlocking system from indoor unit (Switch 3-1 = OFF), while Fresh Master is intended to use by remote controller operation (indoor unit attribute). Disconnection or faulty wiring of indoor unit transmission line. Disconnection between indoor unit M-NET transmission line terminal block (TB5) and connector CN2M. More than 2 sets of power supply connector (CN40) are inserted into centralized control transmission line of heat source unit. Faulty heat source unit control circuit board. Faulty indoor controller board. Faulty remote controller. <hr/> <p>(Interlocking control with MELANS)</p> <ol style="list-style-type: none"> No grouping registration from MELANS (Neglecting to set the relation between indoor unit and network remote controller). Slipping off of centralized control transmission line (TB7) at heat source unit. At system connected with MELANS, power supply connector (CN40) is inserted to centralized control transmission line of heat source unit.

Checking method & countermeasure

In case no MELANS used

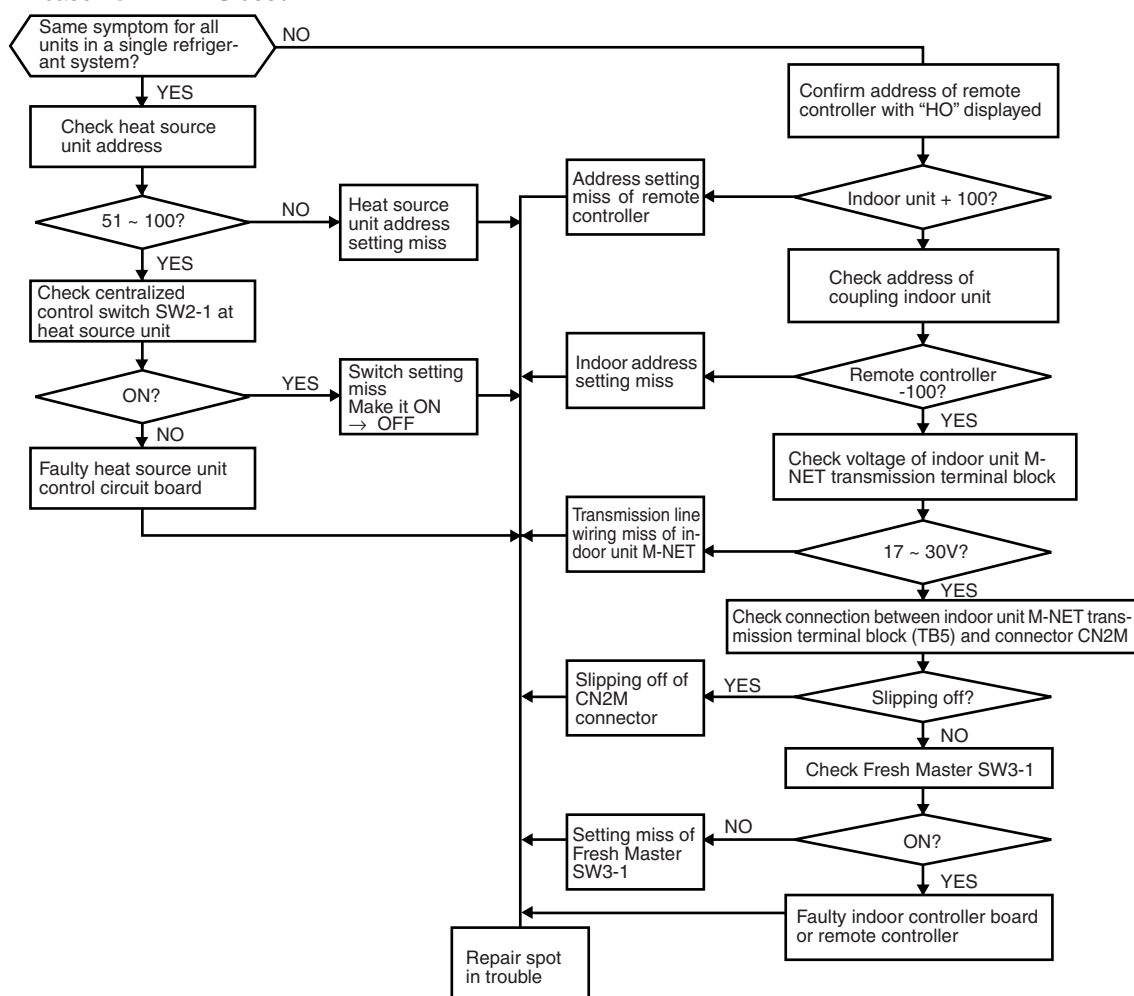

In case with MELANS used

When MELANS is used, "HO" display on the remote controller will disappear at the group registration of the indoor unit and local remote controller.
If "HO" does not disappear after the registration, check the items 12) ~ 14) in the Cause column.

	Symptom	Cause	Checking method & countermeasure
4	"88" appears on remote controller at the registration and access remote controller	<p>[Generates at registration and confirmation]</p> <ol style="list-style-type: none"> 1) Erroneous address of unit to be coupled. 2) Slipping off of transmission line of unit to be coupled (No connection). 3) Faulty circuit board of unit to be coupled. 4) Installation miss of transmission line. <hr/> <p>[Confirmation of different refrigerant system controller]</p> <ol style="list-style-type: none"> 5) Breaking of power source of heat source unit to be confirmed. 6) Slipping off of centralized control transmission line (TB7) of heat source unit. 7) Power supply connector (CN40) is not inserted into centralized control transmission line in grouping with different refrigerant system without using MELANS. 8) More than 2 sets of power supply connector are inserted into the centralized control transmission line of heat source unit. 9) In the system connected with MELANS, power supply connector (CN40) is inserted into the centralized control transmission line of heat source unit. 10) Short circuit of centralized control transmission line. 	<ol style="list-style-type: none"> a) Confirm the address of unit to be coupled. b) Check the connection of transmission line. c) Check the transmission terminal block voltage of unit to be coupled. <ol style="list-style-type: none"> i) Normal if voltage is DC17 ~ 30V ii) Check the item d) in case other than i). <hr/> <ol style="list-style-type: none"> d) Confirm the power source of heat source unit to be coupled with the unit to be confirmed. e) Confirm that the centralized control transmission line (TB7) of heat source unit is not slipped off. f) Confirm the voltage of centralized control transmission line. <ol style="list-style-type: none"> i) Normal in case of 10V ~ 30V ii) Check the items 7) ~ 10) left in case that other than i).

Transmission power circuit (30 V) check procedure

If “” is not displayed by the remote control, investigate the points of the trouble by the following procedure and correct it.

No.	Check item	Judgment	Response
1	Disconnect the transmission line from TB3 and check the TB3 voltage.	DC24~30 V	Check the transmission line for the following, and correct any defects. Broken wire, short circuit, grounding, faulty contact.
		Except the above-mentioned	to No. 2
2	Check if the following connectors are disconnected in the heat source unit's control box. MAIN Board: CNS1, CNVCC3 INV Board: CNVCC1, CNL2, CNR, CNAC2	Connector disconnected	Connect the connectors as shown on the electric wiring diagram plate.
		Except the above-mentioned	to No. 3
3	Disconnect the wires from CNVCC3 on the Main board and check the voltage between pins 1 and 3 on the wire side of the CNVCC3. Tester \oplus 1 pin Tester \ominus 3 pin	DC24~30 V	Check the wiring between CNS1 and TB3 for the following, and correct any defects. Broken wire, short circuit, grounding, faulty contact. If there is no trouble, replace the Main board.
		Except the above-mentioned	to No. 4
4	Disconnect the wiring from CNVCC2 on the INV board and check the voltage between pins 1 and 3 of CNVCC2. Tester \oplus 1 pin Tester \ominus 3 pin	DC24~30 V	Check the wiring between CNVCC2 and CNVCC3 for the following, and correct any defects. Broken wire, short circuit, grounding, faulty contact.
		Except the above-mentioned	to No. 5
5	Disconnect the wiring from CNL2 on the INV board, and check the resistance at both ends of choke coil L2.	0.5~2.5 Ω	to No. 6
		Except the above-mentioned	Replace choke coil L2.
6	Disconnect the wiring from CNR on the INV board, and check the resistance at both ends of R7.	19~25 Ω	to No. 7
		Except the above-mentioned	Replace R7.
7	Check the resistance at both ends of F01 on the INV board.	0 Ω	to No. 8
		Except the above-mentioned	Replace F01
8	Check the voltage between pins 1 and 3 of CNAC2 on the INV board.	AC198~264 V	Replace the INV board.
		Except the above-mentioned	to No. 9
9	Check the voltage between L2 and N on power supply terminal block TB1.	AC198~264 V	Check the wiring to CNAC2 for the following and correct any defects. Broken wire, faulty contact.
		Except the above-mentioned	Check the power supply wiring and base power supply, and correct any defects.


(6) Investigation of transmission wave shape/noise

Control is performed by exchanging signals between heat source unit, indoor unit and remote controller by M-NET transmission. If noise should enter into the transmission line, the normal transmission will be hindered causing erroneous operation.

1) Symptom caused by the noise entered into transmission line

Cause	Erroneous operation	Error code
Noise entered into transmission line	Signal changes and is misjudged as the signal of other address.	6600
	Transmission wave shape changes to other signal due to noise.	6602
	Transmission wave shape changes due to noise, and can not be received normally thus providing no reply (ACK).	6607
	Transmission can not be made continuously due to the entry of fine noise.	6603
	Transmission can be made normally, but reply (ACK) or answer can not be issued normally due to noise.	6607 6608

2) Method to confirm wave shape

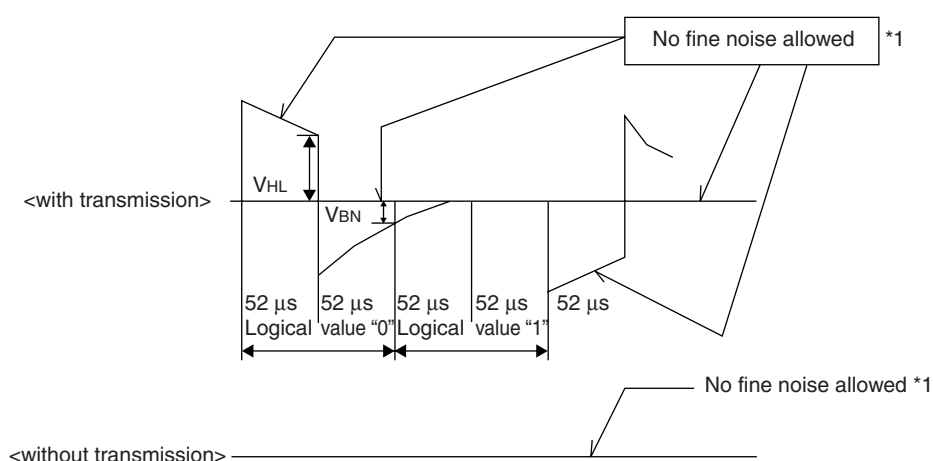

Check the wave shape of transmission line with an oscilloscope to confirm that the following conditions are being satisfied.

- ① The figure should be $104\mu\text{s/bit} \pm 1\%$.
- ② No finer wave shape (noise) than the transmission signal ($52\mu\text{s} \pm 1\%$) should be allowed. *1
- ③ The sectional voltage level of transmission signal should be as follows.

Logic value	Transmission line voltage level
0	$V_{HL} = 2.0\text{V}$ or more
1	$V_{BN} = 1.3\text{V}$ or less

*1 However, minute noise from the DC-DC converter or inverter operation may be picked up.

3) Checking and measures to be taken

(a) Measures against noise

Check the items below when noise can be confirmed on wave shape or the error code in the item 1) is generated.

Items to be checked		Measures to be taken
Checking for wiring method	① Wiring of transmission and power lines in crossing.	Isolate transmission line from power line (5cm or more). Never put them in a same conduit.
	② Wiring of transmission line with that of other system in bundle.	Wire transmission line isolating from other transmission line. Wiring in bundle may cause erroneous operation like crosstalk.
	③ Use of shield wire for transmission line (for both indoor unit control and centralized control).	Use specified transmission wire. Type : Shield line CVVS/CPEVS Wire diameter : 1.25mm ² or more
	④ Repeating of shield at the repeating of transmission line with indoor unit.	The transmission line is wired with 2-jumper system. Wire the shield with jumper system as same for transmission line. When the jumper wiring is not applied to the shield, the effect against noise will be reduced.
	⑤ Are the unit and transmission lines grounded as instructed in the INSTALLATION MANUAL?	Connect to ground as shown in the INSTALLATION MANUAL.
Check for earthing	⑥ Earthing of the shield of transmission line (for indoor unit control) to heat source unit.	One point earthing should be made at heat source unit. Without earthing, transmission signal may be changed as the noise on the transmission line has no way to escape.
	⑦ Arrangement for the shield of transmission line (for centralized control).	For the shield earth of the transmission line for centralized control, the effect of noise can be minimized if it is from one of the heat source units in case of the group operation with different refrigerant systems, and from the upper rank controller in case the upper rank controller is used. However, the environment against noise such as the distance of transmission line, the number of connecting sets, the type of connecting controller, and the place of installation, is different for the wiring for centralized control. Therefore, the state of the work should be checked as follows. a) No earthing • Group operation with different refrigerant systems One point earthing at heat source unit • Upper rank controller is used Earthing at the upper rank controller b) Error is generated even though one point earth is being connected. Earth shield at all heat source units. Connect to ground as shown in the user's manual.

(b) When the wave height value of transmission wave shape is low, 6607 error is generated, or remote controller is under the state of "HO."

Items to be checked		Measures to be taken
	⑧ The farthest distance of transmission line is exceeding 200m.	Confirm that the farthest distance from heat source unit to indoor unit/ remote controller is less than 200m.
	⑨ The types of transmission lines are different.	Use the transmission wire specified. Type of transmission line : Shield wire CVVS/CPEVS Wire dia. of transmission line : 1.25mm ² or more
	⑩ No transmission power (30V) is being supplied to the indoor unit or the remote control.	Refer to "Transmission Power Supply (30V) Circuit Check Procedure."
	⑪ Faulty indoor unit/remote controller.	Replace heat source unit circuit board or remote controller.

4) Treatment of inverter and compressor troubles


If the compressor does not work when error codes 4210, 4240, 4310 or 4340 are detected, determine the point of malfunction by following the steps in the **LED monitor display and countermeasures depending on the check code displayed**, then perform the procedures below.

No.	Check Item	Symptoms	Treatment
1	How many hours was the power kept on before operation?	① If it was kept on for 12 hours or longer as specified.	Go to [2].
		② It was kept on for less than the specified period.	Go to [2] after keeping the power on for the specified time.
2	When it is restarted, does the trouble reappear?	① The compressor stops and the same error code is displayed.	Perform the check of wiring shown in the explanation of each error code.
3	Run the heat source unit with the wiring to the compressor disconnected. At this time, change SW1-1 on the INV board to ON. Note) The terminals of the 3 disconnected wires should be isolated from each other.	① The compressor stops and the same error code is displayed.	Check the transistor module is faulty. (Go to "Individual Parts Failure Judgment Methods.")
		② If the inverter's output voltage is output with good balance, *1.	Check the coil resistance and insulation resistance of the compressor, and if it is normal, run it again, and if the trouble occurs again, replace the compressor. * Insulation resistance : 2MΩ or more Coil resistance : 0.359 ~ 0.716Ω
		③ If the balance in the inverter's output voltage is not good or if the inverter's output voltages are all 0 V (a digital tester cannot be used) *1.	Check the transistor module. Judge that the transistor module is faulty. (Go to "Individual Parts Failure Judgment Methods.") If the transistor module is normal, replace the INV board, then perform this item again with SW1-1 ON. If the problem is solved and you connect the compressor again, turn SW1-1 OFF again. Check the compressor's coil resistance and insulation resistance.

*1 [Cautions when measuring the voltage and current of the inverter's power circuit.]

Since the voltage and current on the inverter's power supply side and its output side do not have a sine waveform, the measurement values will differ depending on the measuring instrument and the circuit measured.


In particular, as the inverter's output voltage has a pulse waveform, the output frequency also changes, so differences in measurement values will be great depending on the measuring instrument.

- ① When checking if the inverter's output voltage is unbalanced or not (relative comparison of the voltages between each of the lines), if you are testing with a portable tester, be sure to use an analog tester.
Use a tester of a type which can be used to judge if the transistor module or diode module is faulty.
In particular, in cases where the inverter's output frequency is low, there are cases where the variations in measured voltage values between the different wires will be great when a portable digital tester is used, when in actuality they are virtually equal, and there is danger of judging that the inverter is faulty.
- ② It is recommended when checking the inverter's output voltage values (when measuring absolute values), that, if a measuring device for business frequencies is used, a rectified voltage meter (with a  symbol) be used.
Correct measurement values cannot be obtained with an ordinary portable tester. (either analog or digital)

5) Troubleshooting at breaker tripping


Check items		Measures to be taken
①	Check the breaker capacity.	The breaker's capacity should be proper.
②	Check the a short circuit or grounding in the electrical system other than the inverter.	Correct any defects.
③	Check the resistance between terminals on the terminal block TB1A for power source.	Check each part inside the inverter power circuit (resistance, megohm or the like). a) Diode stack Refer to "Troubleshooting of diode stack." b) Power transistor Refer to "Troubleshooting of power transistor." c) Rush current protection resistor d) Electromagnetic contactor e) DC reactor * For c) ~ e), refer to "Individual Parts Failure Judgment Methods."
	① 0 ~ several ohms or improper megohm value	
④	Checking by powering again.	
	① Main power source circuit breaker tripping	
	② No display of remote controller	
⑤	Operational check by operating air conditioner	
	① Normal operation without breaker tripping.	a) As there is a possibility of instantaneous short circuit generated, find the mark of the short circuit for repair. b) When a) is not applicable, the compressor may be faulty.
	② Breaker tripping	The ground fault of inverter output/compressor can be supposed. Disconnect the wiring to the compressor and check the insulation resistance of the following parts with a megger. a) Compressor terminals. b) Inverter output.

6) Individual parts failure judgment methods.

Part name	Judgment method						
Diode Stack (DS)	Refer to “Judging Diode Stack Failure.”						
Transistor Module (TRM)	Refer to “Judging Transistor Module Failure.”						
Electromagnetic Contactor (52C)	<p>Measure the resistance value at each terminal.</p> <div style="display: flex; align-items: center; justify-content: center;">  <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Check Location</th><th>Judgment Value</th></tr> </thead> <tbody> <tr> <td>A1-A2</td><td>0.1k~1.3kΩ</td></tr> <tr> <td>1/L1-2/T1 3/L2-4/T2 5/L3-6/T3</td><td>∞</td></tr> </tbody> </table> </div>	Check Location	Judgment Value	A1-A2	0.1k~1.3kΩ	1/L1-2/T1 3/L2-4/T2 5/L3-6/T3	∞
Check Location	Judgment Value						
A1-A2	0.1k~1.3kΩ						
1/L1-2/T1 3/L2-4/T2 5/L3-6/T3	∞						
Rush current protection resistor (R1, 5)	Measure the resistance between terminals: 4.5k~5.5kΩ						
DC reactor (DCL)	Measure the resistance between terminals: 1 Ω or lower						
	Measure the resistance between the terminals and the chassis: ∞						
Cooling fan (MF1)	Measure the resistance between terminals: 0.1k~1.5kΩ						
Transformer (T01)	<p>Measure the resistance between terminals on the primary side (CNTR1): 1.0k~2.5kΩ</p> <p>Measure the resistance between terminals on the secondary side (CNTR): 20~60Ω</p>						

[Caution at replacement of inverter parts]


- ① The transistor module and INV board should be replaced together at the same time.
When the transistor module is damaged, the INV board may possibly be broken, and the use of the broken INV board damages the normal transistor module. Therefore, replace the transistor module and INV board together at the same time. However, if the INV board is damaged, judge that the transistor module is faulty, then judge whether replacement is necessary or not.
- ② Fully check wiring for incorrect and loose connection.
The incorrect or loose connection of the power circuit part wiring like transistor module and diode module causes to damage the transistor module. Therefore, check the wiring fully. As the insufficient tightening of screws is difficult to find, tighten them together additionally after finishing other works. For the wiring of the base for transistor module, observe the wiring diagram below carefully as it has many terminals.
- ③ Coat the grease for radiation provided uniformly onto the radiation surface of transistor/diode modules.
Coat the grease for radiation on the full surface in a thin layer, and fix the module securely with the screw for fastening. As the radiation grease attached on the wiring terminal causes poor contact, wipe it off if attached.

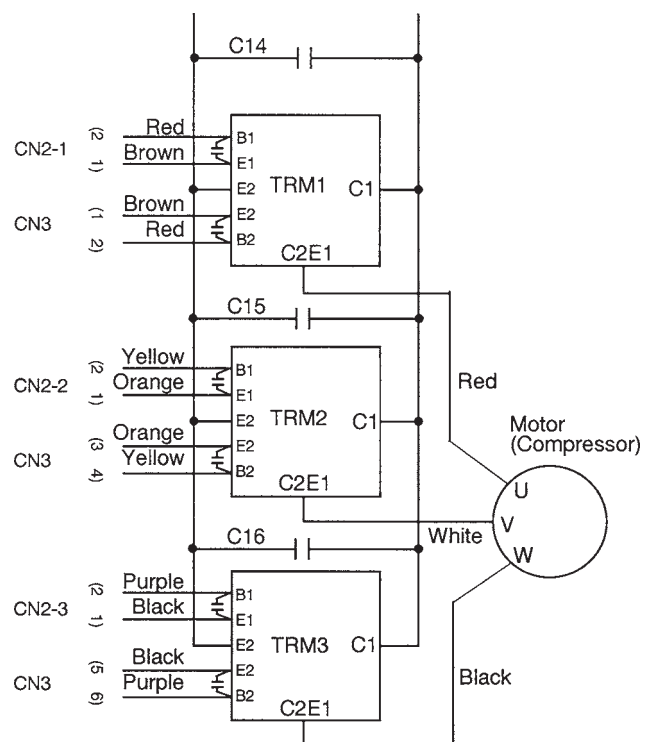

(8) Troubleshooting the major components of the BC controller

1) Pressure sensor

Pressure sensor troubleshooting flow

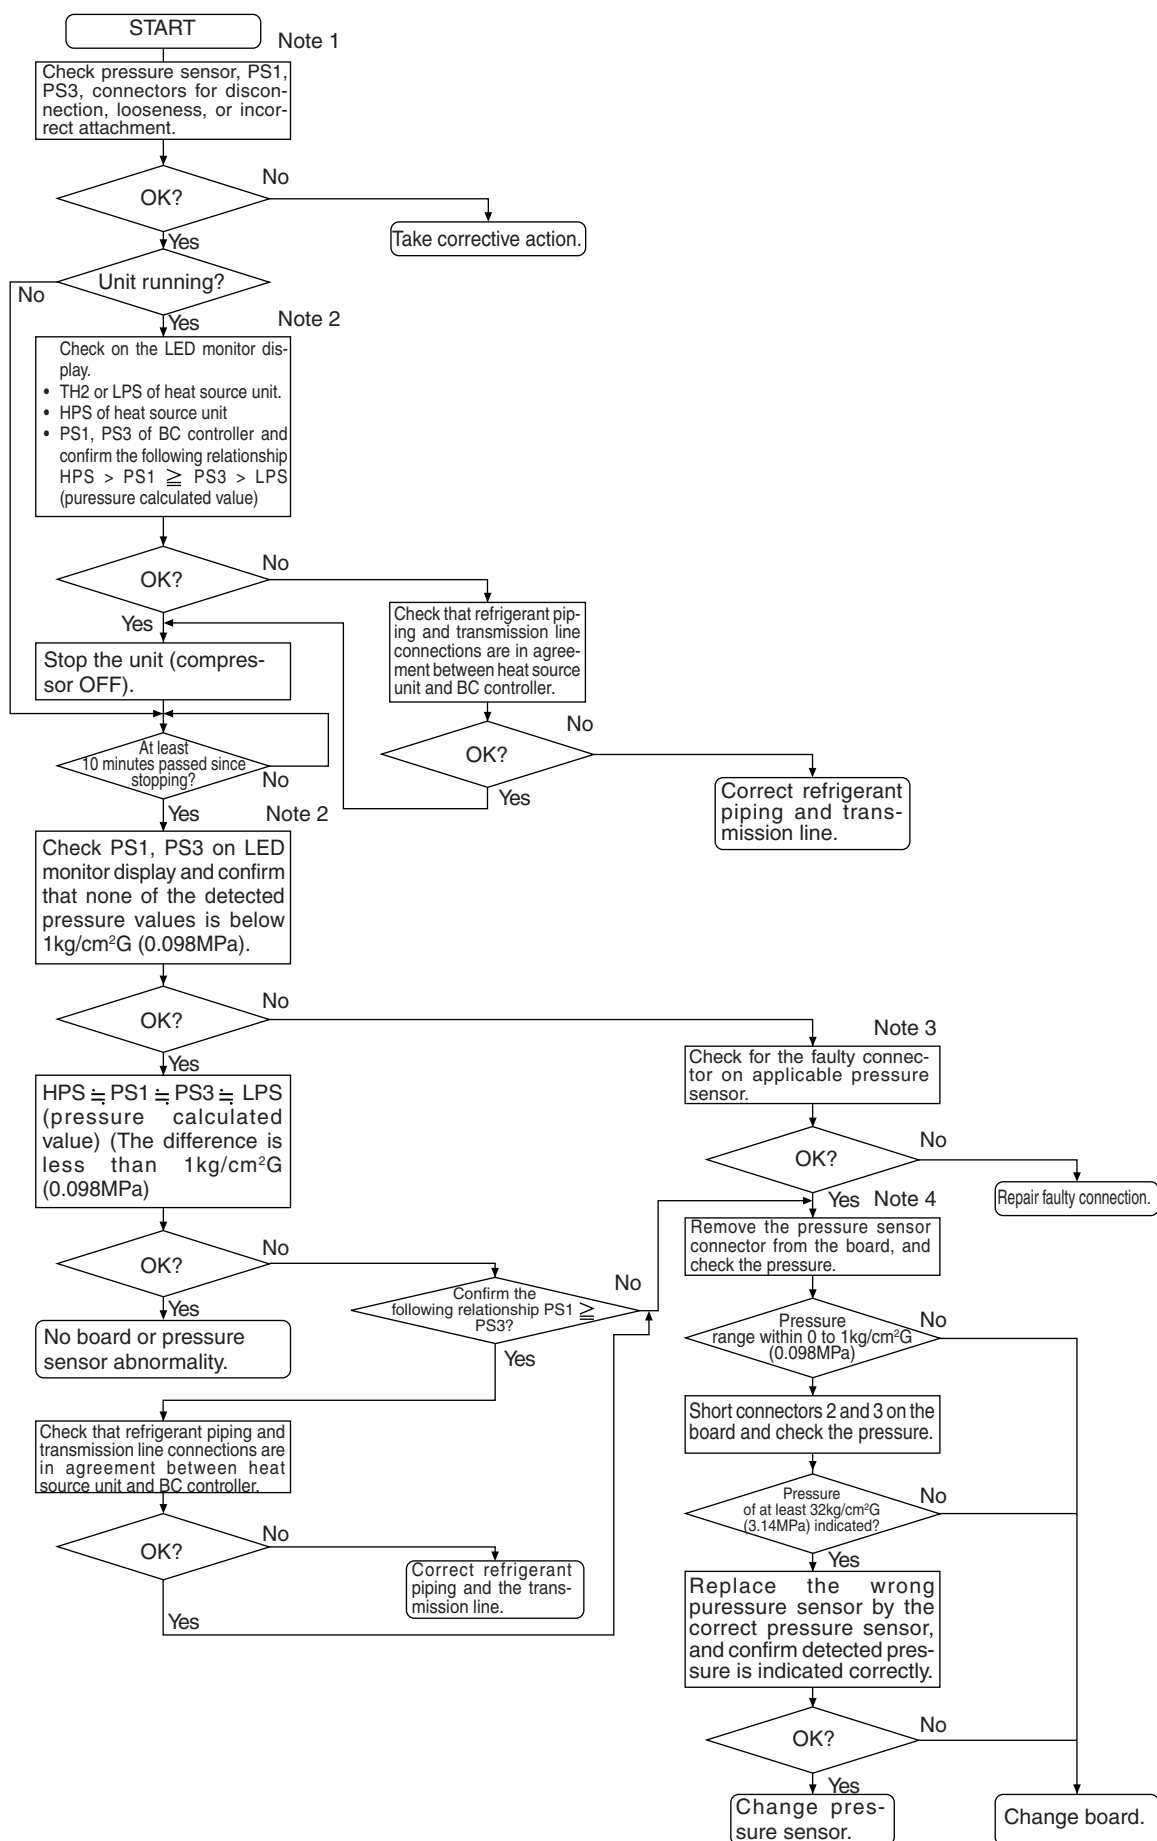





Note 1 :

- Symptoms of incorrect connection of BC controller pressure sensor to the board

Symptom						
Cooling-only	Cooling-principal		Heating-only		Heating-principal	
Normal	Insufficient cooling.	SC11 large SC16 small $\Delta PHM < 0$	Warm indoor SC small. Warm indoor thermo ON especially noise.	SC11 small SC16 small $\Delta PHM < 0$	Insufficient heating Warm indoor SC small Warm indoor thermo ON especially noise	SC11 large SC16 small $\Delta PHM < 0$

Note 2 :

- Check using LED monitor display switch (heat source unit MAIN board SW1)

Measured Data	Signal	SW1 Setting
High pressure	HPS	ON 
Low pressure	LPS	ON 
BC controller pressure (liquid measurement) (intermediate)	PS1	ON 
	PS3	ON 

Note 3 :


- Check CNP1 (liquid measurement) and CMP3 (intermediate) connectors on BC controller board for disconnection or looseness.

Note 4 :

- With the sensor of the applicable connector removed from the board, use the LED monitor display switch (Note 1) to check the pressure value.


Pressure Sensor Replacement Precaution

(Pressure sensor output voltage)

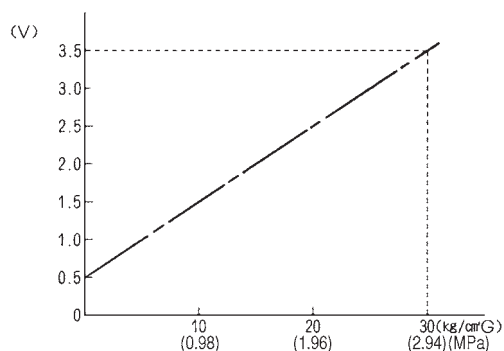


2) Temperature sensor

Thermistor troubleshooting flow

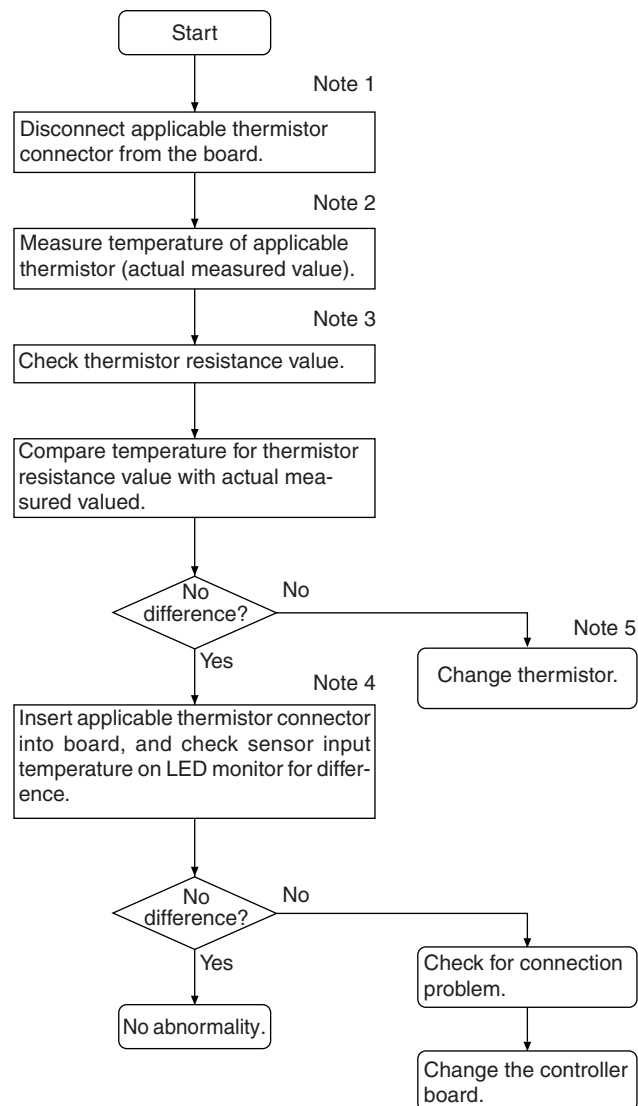

Note 1 :


- Board connector CN10 corresponds to TH11 through TH12, while connector CN11 corresponds to TH15 through TH16. Remove the applicable connector and check the sensor for each number.



Note 2, 3 :


- Pull the sensor connector from the I/O board. Do not pull on the lead wire.
- Measure resistance using a tester or other instrument.
- Compare measured values with values on the graph below. A value within a range of $\pm 10\%$ is normal.

Resistance measurement point (connector)



Touch the probes of the tester or other instrument to the shaded areas to measure.

Temperature sensor resistance (graph)

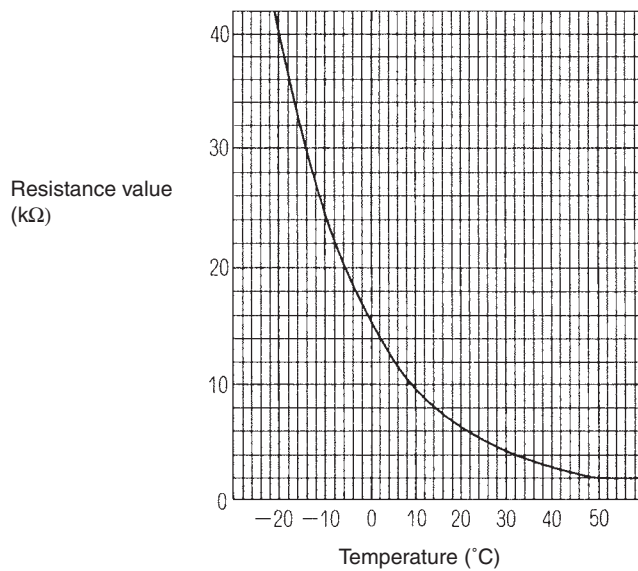

Thermistor $R_0 = 15 \text{ k}\Omega$


$$R_t = 15 \exp 3460 \left\{ \left(\frac{1}{273+t} - \frac{1}{273} \right) \right\}$$

Note 4 :

- Check using LED monitor display switch (outdoor MAIN board SW1)

Measured Data	Signal	SW1 Setting
Liquid inlet temperature	TH11	<div>1 2 3 4 5 6 7 8 9 10</div> <div>ON</div> <div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div>

3) LEV, solenoid valve troubleshooting flow

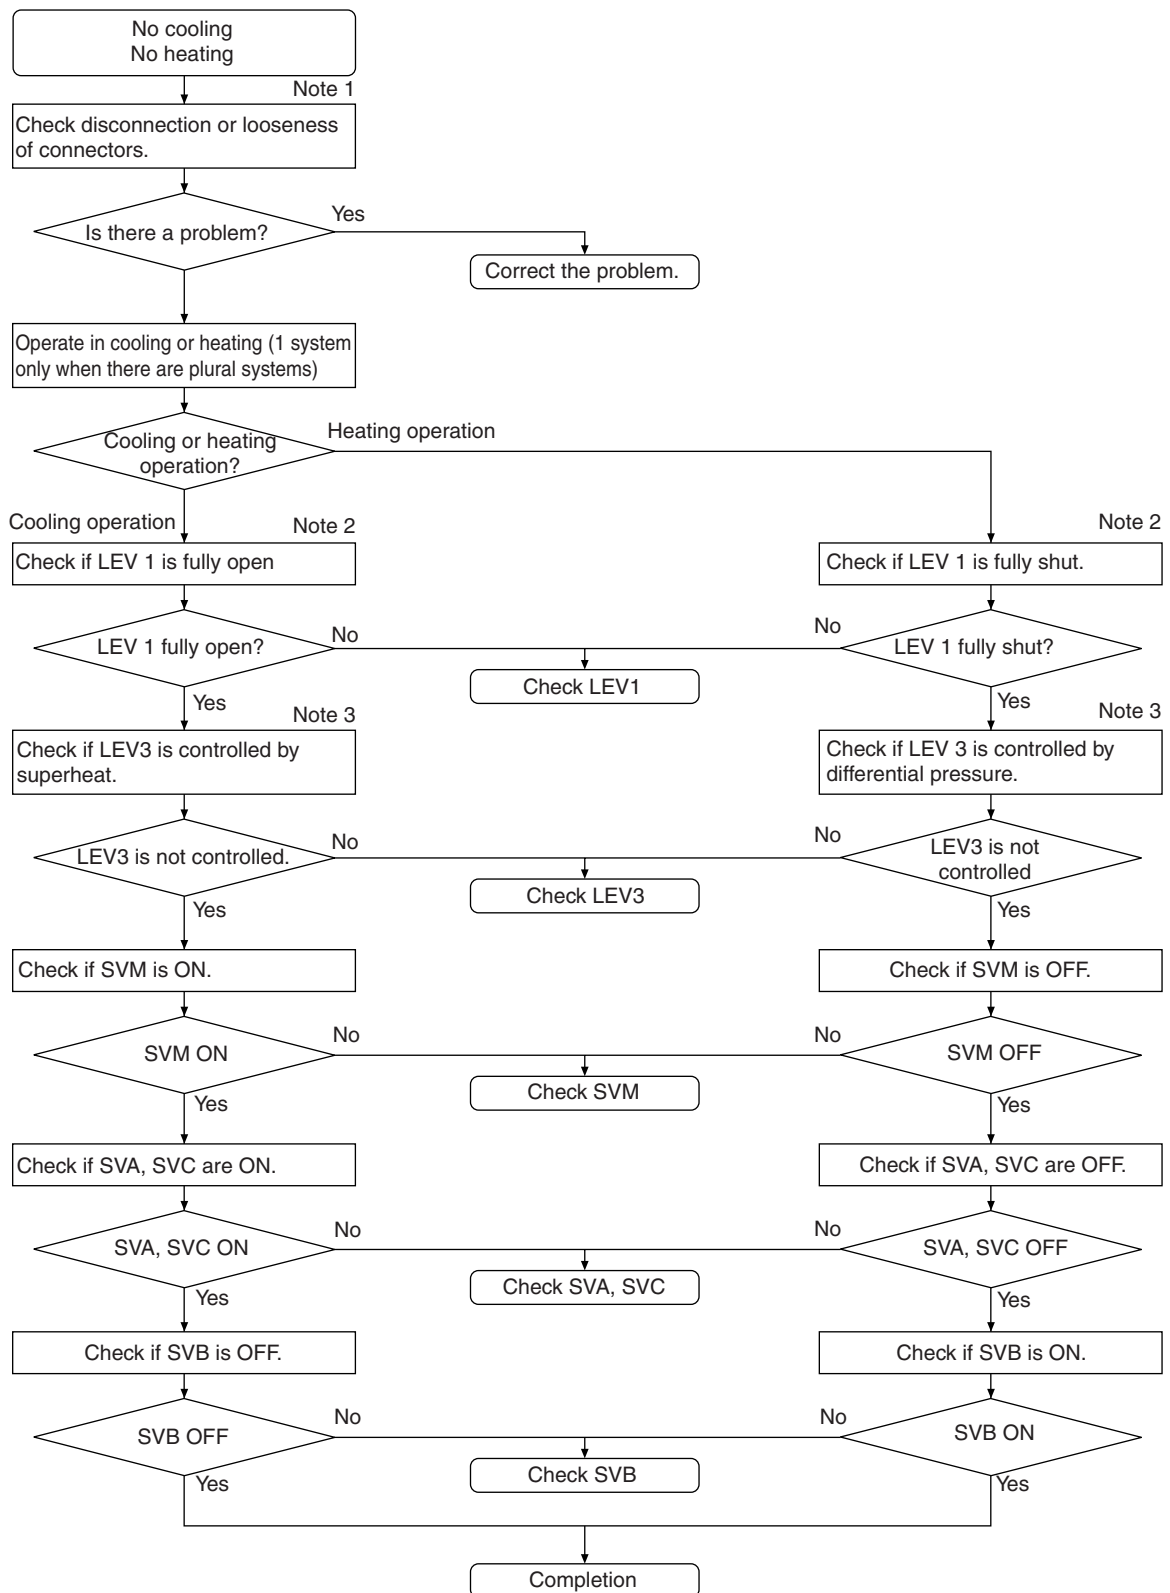

① LEV

Note 1 :

- Symptoms of incorrect connection to BC controller LEV board

LEV No.	1	3	Cooling-only	Cooling-main	Heating-only	Heating-main
1)	1	3	Normal	←	←	←
2)	3	1	Insufficient cooling SH12 small, SC11 small SC16 small Branch piping SC small	Insufficient cooling, insufficient heating SH12 small, SC11 small SC16 large, Branch piping SC small △ PHM large	Heating indoor SC small △ PHM large	Insufficient cooling Heating indoor SC small △ PHM large

Improper installation is the same for ① and ②, so it is omitted here.

Note 2 : Method for checking LEV full open, full closed condition






- Check LEV full opening (pulse) using the LED monitor display (outdoor controller board SW1).
Full opened: 2000 pulses
Full closed: 60 pulses (LEV 1 may be greater than 60 during full heating operation.)
- With LEV full opened, check for pressure differential by measuring temperature of piping on both sides.
- With LEV full closed, check for refrigerant noise.

Note 3 : Use the following table to determine opening due to LEV differential pressure control and superheat control.


- BC controller LEV basic operation characteristics

Region	Failure mode	Operating mode	Description	Normal range
LEV1 pulse	Small	Heating-only	High pressure (PS1) - medium pressure (PS3) is large.	2.0 ~ 3.5 kg/cm ² G (0.20~0.34MPa)
	Large	Heating-main Cooling-main	High pressure (PS1) - medium pressure (PS3) is small.	
LEV3 pulse	Small	Cooling-only	SH12 is large.	SH12<25
		Cooling-main		
	Large	Heating-only	High pressure (PS1) - mid pressure (PS3) is small.	2.0 ~ 3.5 kg/cm ² G (0.20~0.34MPa)
		Heating-main		
	Small	Cooling-only	SC16 and SH12 are small.	SC16>6 SH12>5
		Cooling-main		
	Large	Heating-only	High pressure (PS1) - mid pressure (PS3) is large.	2.0 ~ 3.5 kg/cm ² G (0.20~0.34MPa)
		Heating-main		


(Self-diagnostic monitor)

Measured data	Signal	Heat source unit MAIN board SW1 setting
LEV 1 pulse	—	ON 
LEV 3 pulse	—	ON 
BC controller bypass output superheat	SH12	ON 
BC controller intermediate subcool	SC16	ON 
BC controller liquid subcool	SC11	ON 

(Solenoid Valve Troubleshooting Flow)

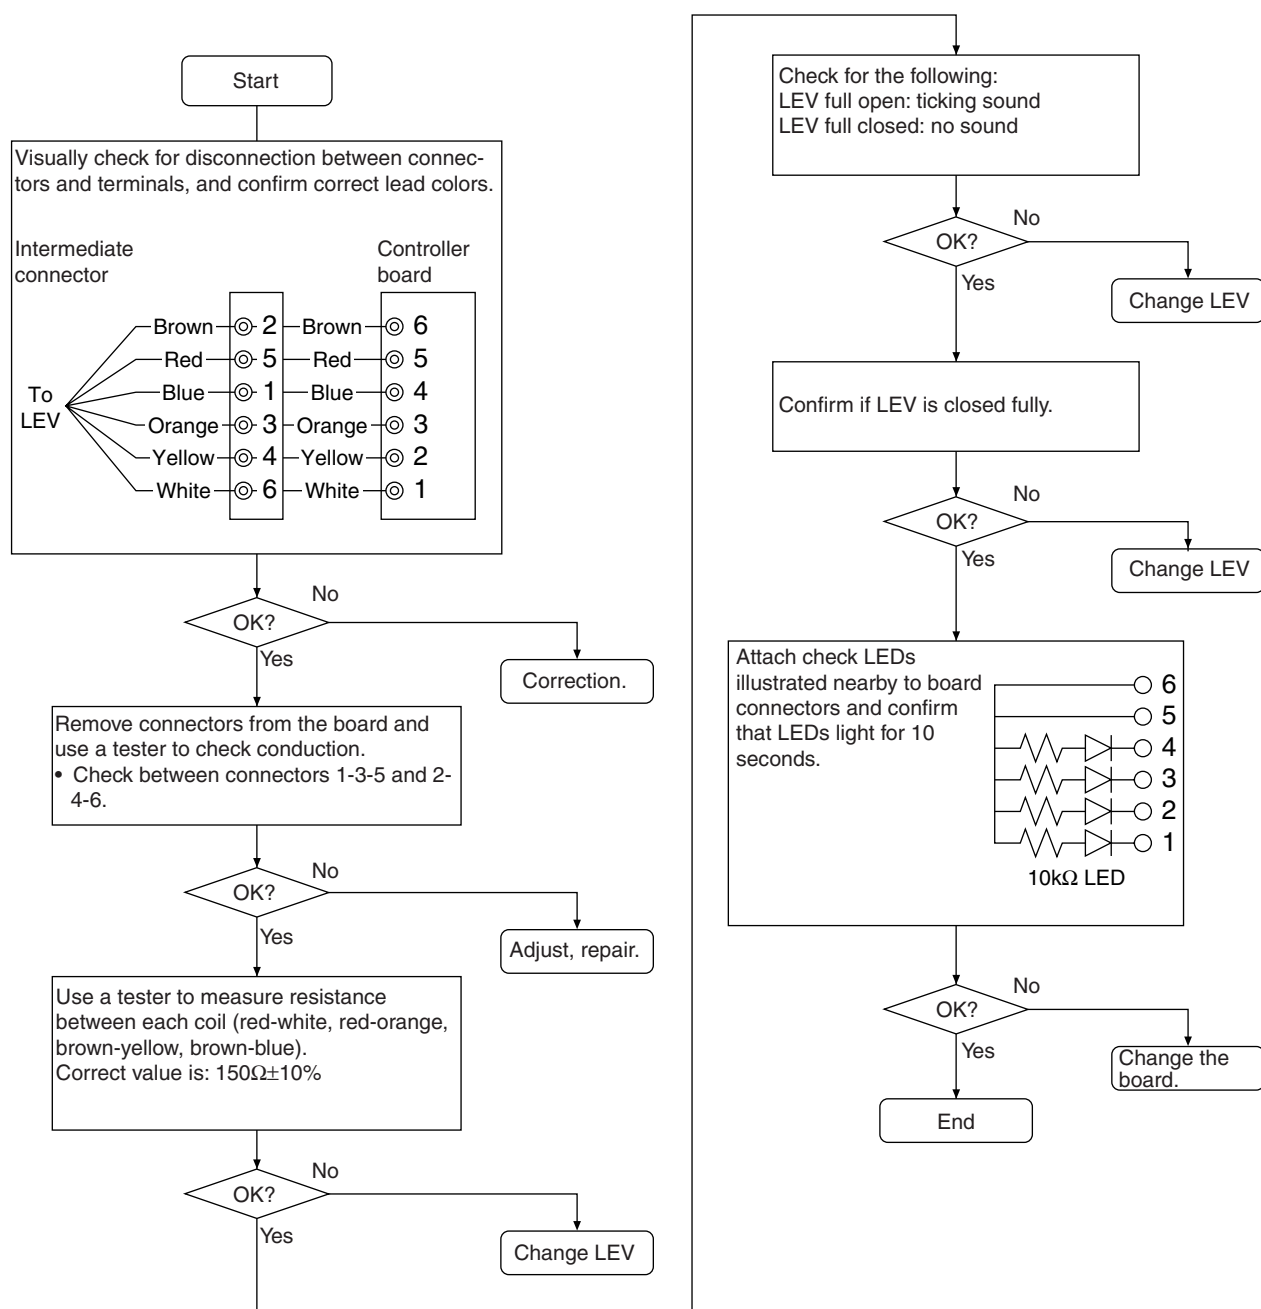

② Solenoid Valve

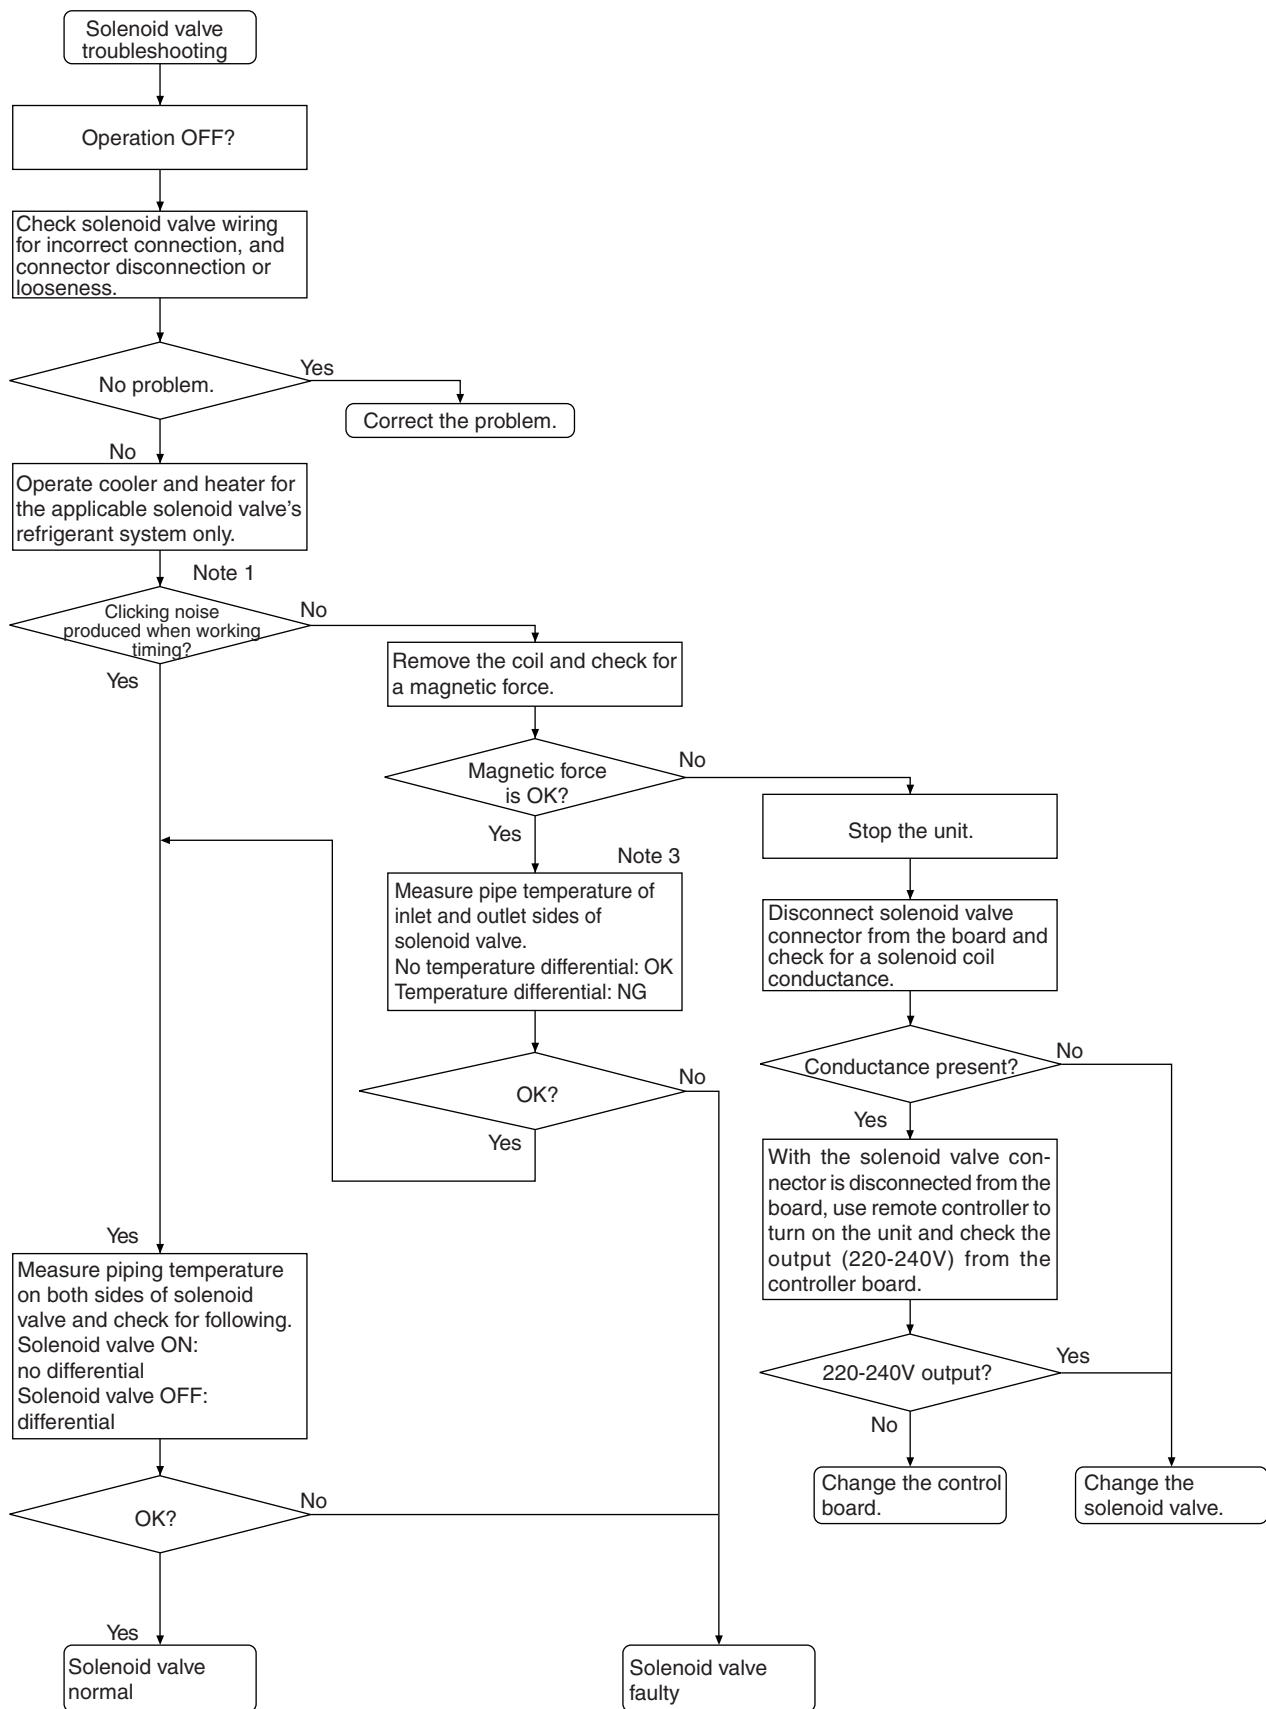

Solenoid valves (SVA, SVB, SVC, SVM)

Coordination signals output from the board and solenoid valve operations.

Note 1 : (SVA, SVB, SVC)

SVA, SVB and SVC are turned on and off in accordance with operation mode.

Mode Branch port	Cooling	Heating	Stopped	Defrosting
SVA	ON	OFF	OFF	OFF
SVB	OFF	ON	OFF	OFF
SVC	ON	OFF	OFF	OFF

(SVM)

SVM is turned on and off in accordance with operation mode.

Operation Mode	Cooling-only	Cooling-principal	Heating-only	Heating-principal	Defrosting	Stopped
SVM	ON	OFF	OFF	OFF	ON	OFF


Note 2 : (SVA, SVB, SVC)

Measure temperature of piping on either side of SVA ①-④


Measure temperature of piping on either side of SVB ①-④

(SVM)


Measure temperature at points marked "X".

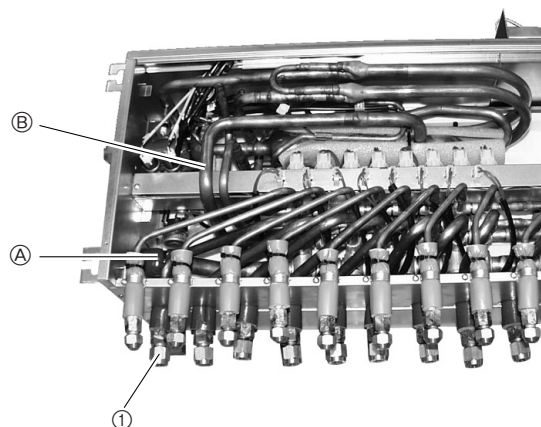

CMB-P-V-E



4) BC controller transformer

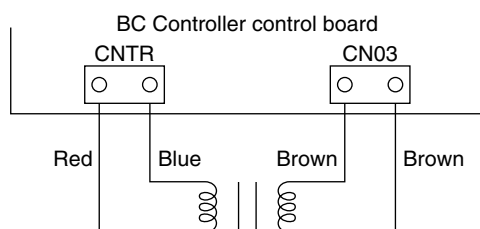


	Normal	Malfunction
CNTR(1)-(3)	Approximately 90Ω	Open or shorted
CN03(1)-(3)	Approximately 1.7Ω	

* Disconnect the connector before measurement.

[2] BC Controller Disassembly Procedure


(1) Service panel

Be careful on removing heavy parts.

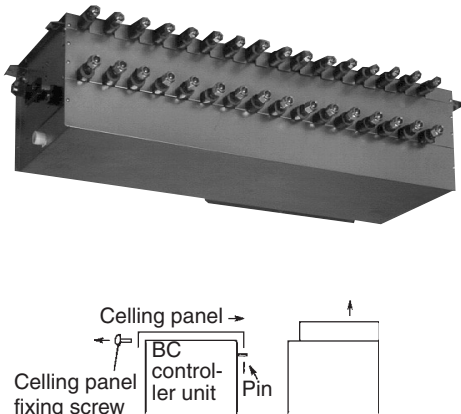Procedure	Photos & Illustrations
<ol style="list-style-type: none">1. Remove the two screws securing the electric panel box, and then remove the box.2. Remove the four screws securing the front panel and then remove the panel. Two of the screws are not visible until you remove the electric panel box.3. Remove the two screws securing the ceiling panel. Next, lifting up on the panel slightly, slide it inwards and then remove it. The inside of the ceiling panel is hooked on a pin.4. Remove the single screw that secures the side panel, and then remove the panel.	


(2) Control box

Be careful on removing heavy parts.

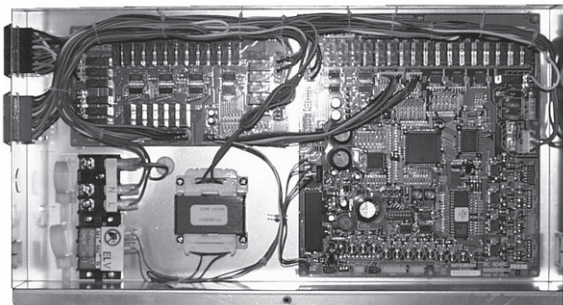
Procedure	Photos
<p><CMB-P104, 105, 106V-E></p> <ol style="list-style-type: none">1. Removing the single screw that secures the electric panel box cover provides access to the box contents for checking.<ol style="list-style-type: none">① Check electrical lead wires and transmission lead terminal connections.② Check the transformer.③ Check the address switch.④ Use the self-diagnostic switch to check the LED display.2. Disconnect the power supply lead, transmission lead, transformer lead connector, and address switch wiring connector. Removing the screw securing the inner cover provides access for checking the entire controller board.3. Note the following precautions whenever replacing the controller board.<ol style="list-style-type: none">① Be sure you do not confuse a Type A controller board with a Type B controller board.② Take care to avoid mistakes when connecting leads and connectors, and double-check for incomplete and loose connections.③ Check to make sure that DIP switch settings are the same before and after replacement. <p>Important! You do not need to remove the two electric panel screws if you are checking electric panel box contents only.</p> <p><CMB-P108, 1010,1013,1016V-E> Removing the single screw that secures the electric panel box cover provides access to the controller board and all of the relay board for checking. So it is not necessary to work according to above 2.</p>	

(3) Thermistor (Liquid and gas piping temperature detection)

Be careful when removing heavy parts.

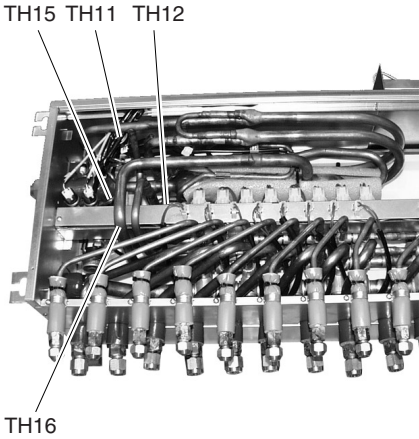
Procedure	Photos
<ol style="list-style-type: none">1. Remove the service panel<ol style="list-style-type: none">① Use the procedure under (1)-1.2 to check TH11, TH12, and TH15.2. Disconnect the piping sensor lead from the controller panel.<ol style="list-style-type: none">① TH11 - TH12 (CN10)② TH15, TH16 (CN11)3. Pull the temperature sensor from the temperature sensor housing and replace it with a new sensor.4. Connect the temperature sensor lead securely to the controller board.	

(4) Pressure sensor

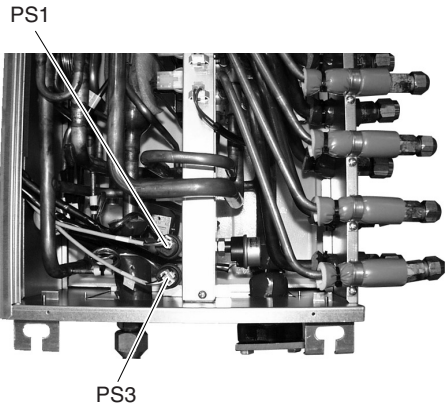
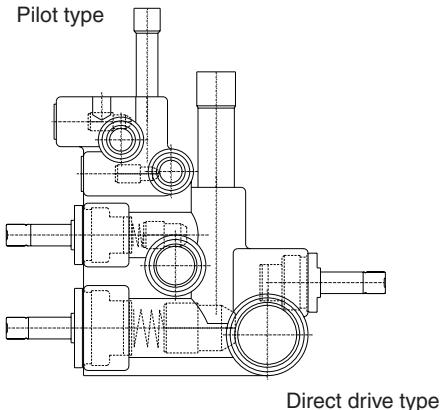
Procedure	Photos
<ol style="list-style-type: none">1. Remove the sensor panel.<ol style="list-style-type: none">① Use the procedure under (1)-1.2 to check PS1 and PS3.2. Disconnect the connector of the applicable pressure sensor from the controller board and insulate the connector.<ol style="list-style-type: none">① Liquid pressure sensor (CNP1)② Intermediate pressure sensor (CNP3)3. Install a new pressure sensor at the location shown in the photograph, and plug the connector into the controller board. <p>Important</p> <ol style="list-style-type: none">① In the case of gas leakage from the pressure sensor, take actions to fix the leak before performing the above procedure.	

(5) LEV

Be careful on removing heavy parts.

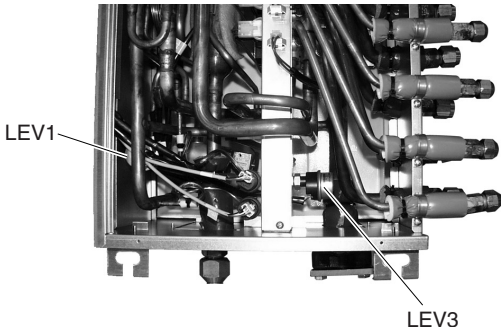Procedure	Photos
<ol style="list-style-type: none"> 1. Remove the service panel. See (1)-1.2.3.4. 2. Replace the applicable LEV. <p>Important!</p> <ol style="list-style-type: none"> ① When performing the above procedure, be sure to allow for enough service space in the ceiling area for welding. ② When conditions require, the unit can be lowered from the ceiling before starting work. 	

(6) Solenoid Valve Coil

Procedure	Photos & Illustrations
<ol style="list-style-type: none"> 1. Remove the service panel. See (1)-1.2.3.4. 2. Disconnect the connector of the applicable solenoid valve. 3. Remove the solenoid valve coil. <ol style="list-style-type: none"> ① SVA, SVB, and SVM solenoid valve coils can be serviced from the maintenance port. SVC can be serviced from the back if service space is available in the back. To remove the back panel, remove the two screws that secure it. 4. When the solenoid valve is defective, remove the unit front panel, disassemble the solenoid valve block, and check the interior of the valve. When disassembly space or footing for disassembly of the solenoid valve block in the vicinity of the flow controller is not available, the unit can be lowered from the ceiling to perform the work. <ol style="list-style-type: none"> ① To view the interior of a valve, use a torque wrench to open the screw cover of the movable component compartment and the plunger. ② When replacing the screw cover and plunger, tighten them to the specified torque. <p>SVA screw cover: 20 kg·m (2.0 N·m)</p> <p>SVB screw cover: 13 kg·m (1.3 N·m)</p> <p>SVA, B, C plungers: 6 kg·m (0.6 N·m)</p> <p>Important!</p> <ol style="list-style-type: none"> ① You cannot check the valve interiors of SVC and SVM. ② Be sure to tighten screw covers and plungers to specified torque values. Under-tightening can cause gas leaks, over-tightening can cause abnormal operation. 	 <p>Solenoid valve</p>  <p>Pilot type</p> <p>Direct drive type</p>

Check code list

Check code	Check content	
0403	Serial transmission abnormality	
0900	Trial operation	
1102	Discharge temperature abnormality	
1111	Low pressure saturation temperature sensor abnormality (TH2)	
1112	Low pressure saturation	Liquid level sensing temperature sensor abnormality (TH4)
1113	temperature abnormality	Liquid level sensing temperature sensor abnormality (TH3)
1301	Low pressure abnormality (OC)	
1302	High pressure abnormality (OC)	
1500	Overcharged refrigerant abnormality	
1501	Low refrigerant abnormality	
1505	Suction pressure abnormality	
1607	Configuration detection abnormality	
2000	Pump interlock abnormality	
2134	Water temperature abnormality	
2135	Water heat exchanger frost abnormality	
2500	Leakage (water) abnormality	
2502	Drain pump abnormality	
2503	Drain sensor abnormality	
4103	Reverse phase abnormality	
4115	Power supply sync signal abnormality	
4116	Fan speed abnormality (motor abnormality)	
4200	VDC-IDC sensor/circuit abnormality	
4210	Breaking of overcurrent	
4220	Bus voltage abnormality	
4230	Radiator panel overheat protection	
4240	Overcurrent protection	
4260	Cooling fan abnormality	
5101	Thermal sensor abnormality	Air inlet (TH21:IC)
		Discharge (TH1:OC)
5102		Liquid pipe (TH22:IC)
		Low pressure saturation (TH2:OC)
5103		Gas pipe (TH23:IC)
		Accumulator liquid level (TH3)
5104		Accumulator liquid level (TH4)
5106		Inlet water temperature (TH6)
5107		THINV
5109		CS circuit (TH9)
5110		Radiator panel (THHS)
5112		Compressor shell temperature (TH10)
5201	Pressure sensor abnormality (OC)	
5301	IDC sensor/circuit abnormality	
6600	Multiple address abnormality	
6602	Transmission processor hardware abnormality	
6603	Transmission circuit bus-busy abnormality	

Check code	Check content
6606	Communications with transmission processor abnormality
6607	No ACK abnormality
6608	No response abnormality
7100	Total capacity abnormality
7101	Capacity code abnormality
7102	Connected unit count over
7105	Address setting abnormality
7106	Characteristics setting abnormality
7107	Connection number setting abnormality
7111	Remote control sensor abnormality
7130	Different indoor model connected abnormality

Intermittent fault check code

Trouble delay cope	Trouble delay content
1202	Preliminary discharge temperature abnormality or preliminary discharge thermal sensor abnormality (TH1)
1211	Preliminary low pressure saturation abnormality or preliminary low pressure saturation sensor abnormality (TH2)
1212	Preliminary low pressure saturation abnormality or preliminary liquid level sensor upper thermal sensor abnormality (TH4)
1213	Preliminary low pressure saturation abnormality or preliminary liquid level sensor lower thermal sensor abnormality (TH3)
1214	Preliminary THHS sensor/circuit abnormality
1215	Preliminary sub-cool coil outlet thermal sensor abnormality (THINV)
1219	Preliminary sub-cool coil bypass inlet thermal sensor abnormality (TH9)
1221	Preliminary inlet water temperature thermal sensor abnormality (TH6)
1243	Preliminary compressor shell thermal sensor abnormality (TH10)
1402	Preliminary high pressure abnormality or preliminary pressure sensor abnormality
1600	Preliminary overcharged refrigerant abnormality
1601	Preliminary lacked refrigerant abnormality
1605	Preliminary suction pressure abnormality
1607	CS circuit block abnormality
2100	Preliminary pump interlock abnormality
2234	Preliminary water temperature abnormality
2235	Preliminary water heat exchanger abnormality
3252	Preliminary control box abnormality
4300	Preliminary IDC sensor/circuit abnormality
	Preliminary VDC sensor/circuit abnormality
	Preliminary serial transmission abnormality
4310	Preliminary overcurrent breaking abnormality
4320	Preliminary bus voltage abnormality
4330	Preliminary heat sink overheating abnormality
4340	Preliminary overload protection
4360	Preliminary cooling fan abnormality

[3] Self-diagnosis and Countermeasures Depending on the Check Code Displayed

(1) Mechanical

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
0403	Serial transmission abnormality	If serial transmission cannot be established between the MAIN and INV boards.	1) Wiring is defective.	Check 1, the connections, 2, contact at the connectors and 3, for broken wires in the following wiring. CNRS2 - CNRS3 CNAC2 - TB1A
			2) Switches are set wrong on the INV board.	SW1-4 on the INV board should be OFF.
			3) A fuse (F01) on the INV board is defective.	If the fuse is melted, (if the resistance between the both ends of fuse is ∞), replace the fuse.
			4) The circuit board is defective.	If none of the items in 1) to 3) is applicable, and if the trouble reappears even after the power is switched on again, replace the circuit board by the following procedure (when replacing the circuit board, be sure to connect all the connectors, ground wires, etc. securely). ① If serial transmission is restored after the INV board only is replaced, then the INV board is defective. ② If serial transmission is not restored, reinstall the INV board and replace the MAIN board. If serial transmission is restored, the MAIN board is defective. ③ If serial transmission is not restored by ① and ② above, replace both boards.

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
1102	Discharge temperature abnormality (Heat source unit)	<p>1. When 140°C or more discharge temperature is detected during operations (the first time), heat source unit stops once, mode is changed to restart mode after 3 minutes, then the heat source unit restarts.</p> <p>2. When 140°C or more temp. is detected again (the second time) within 30 minutes after stop of heat source unit, emergency stop is observed with code No. "1102" displayed.</p> <p>3. When 140°C or more temp. is detected 30 or more minutes after stop of heat source unit, the stop is regarded as the first time and the process shown in 1 is observed.</p> <p>4. 30 minutes after stop of heat source unit is intermittent fault check period with LED displayed (1202).</p>	1) Gas leak, gas shortage.	See Refrigerant amount check .
			2) Overload operations.	Check operating conditions and operation status of indoor/heat source units.
			3) Poor operations of indoor LEV. 4) Poor operations of BC controller LEV: Cooling-only : LEV3 Cooling-main : LEV1, 3 Heating-only, Heating-main: LEV3	Check operation status by actually performing cooling or heating operations. Cooling : Indoor LEV (Cooling-only) LEV1, 3 (BC) SVM (BC) SVA (BC) Heating : Indoor LEV (Heating-only) LEV3 (BC) SVB (BC) SV3 ~ 6, SV73
			5) Poor operations of BC controller SVM : Cooling-only, defrost	See Trouble check of LEV and solenoid valve .
			6) Poor operations of BC controller SVA : Cooling-only, Cooling-main	
			7) Poor operations of BC controller SVB : Heating-only, Heating-main	
			8) Poor operations of solenoid valves. SV (3 ~ 6, SV73) : Heating-only, Heating-main	
			9) Setting error of connection address (PQRY).	Check address setting of indoor unit connection.
			10) Poor operations of ball valve.	Confirm that ball valve is fully opened.
			11) Heat source unit fan block, motor trouble, poor operations of fan controller→Heating (Heating-only, Heating-main). [3) ~ 11) : Rise in discharge temp. by low pressure drawing.]	Check outdoor fan. See Trouble check of outdoor fan .
			12) Gas leak between low and high pressures. [4-way valve trouble, compressor trouble, solenoid valve SV1 trouble.]	Check operation status of cooling-only or heating-only.
			13) Poor operations of solenoid valve SV2. [Bypass valve SV2 can not control rise in discharge temp.]	See Trouble check of solenoid valve .
			14) Thermistor trouble.	Check resistance of thermistor.
			15) Thermistor input circuit trouble on control circuit board.	Check inlet temperature of sensor with LED monitor.

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
1111	Low pressure saturation temperature trouble	Low pressure saturation temperature sensor abnormality (TH2)	1) Gas leak, Gas shortage. 2) Insufficient load operations. 3) Poor operations of indoor LEV. 4) Poor operations of BC controller LEV: Cooling-only : LEV3 Cooling-main : LEV1, 3 Heating-only, Heating-main: LEV3 5) Poor operations of BC controller SVM: Cooling-only, Defrost 6) Poor operations of BC controller SVM: Cooling-only, Cooling-main 7) Poor operations of BC controller SVB: Heating-only, Heating-main 8) Solenoid valve trouble (SV3 ~ 6, SV73). Heating-only, Heating-main	See Refrigerant amount check . Check operating conditions and operation status of heat source unit. Check operation status by actually performing cooling-only or heating-only operations. Cooling-only : indoor LEV LEV1, 3 (BC) SVM (BC) SVA (BC) Heating-only : indoor LEV LEV3 (BC) SVB (BC) SV3~6, SV73
1112		Liquid level detecting temperature sensor abnormality (TH4)	9) Setting error of connection address. 10) Poor operations of ball valve. 11) Short cycle of indoor unit. 12) Clogging of indoor unit filter. 13) Fall in air volume caused by dust on indoor unit fan. 14) Dust on indoor unit heat exchanger. 15) Indoor unit block, Motor trouble. [9)~14) : Fall in low pressure caused by evaporating capacity in cooling-only cooling-principal operation.]	See Trouble check of LEV and solenoid valve . Check address setting of indoor unit connector. Confirm that ball valve is fully opened. Check indoor unit, and take measures to trouble.
1113		Liquid level detecting temperature sensor abnormality (TH3)	16) Short cycle of heat source unit. 17) Dust on outdoor heat exchanger. 18) Indoor unit fan block, motor trouble, and poor operations of fan controller. [15)~17) : Fall in low press. caused by lowered evaporating capacity in heating-only heating-principal operation.] 19) Poor operations of solenoid valve SV2. [Bypass valve (SV2) can not control low pressure drop.] 20) Thermistor trouble (TH2~TH10). 21) Pressure sensor abnormality. 22) Control circuit board thermistor abnormality and pressure sensor input circuit abnormality. 23) Poor mounting of thermistor (TH2~TH10).	Check heat source unit, and take measures to trouble. Check heat source unit fan. See Trouble check of heat source unit fan . See Trouble check of solenoid valve . Check resistance of thermistor. See Trouble check of pressure sensor . Check inlet temp. and press. of sensor by LED monitor.

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
1301	Low pressure abnormality	When starting from the stop mode for the first time, (if at the start of bind power transmission, the end of bind power transmission, and in the mode when the thermostat goes OFF immediately after the remote control goes ON, the following compressor start time is included), if the low pressure pressure sensor before starting is at 1.0 kg/cm ² G (0.098MPa), operation stops immediately.	1) Internal pressure is dropping due to a gas leak. 2) The low pressure pressure sensor is defective. 3) Insulation is torn. 4) A pin is missing in the connector, or there is faulty contact. 5) A wire is disconnected. 6) The control board's low pressure pressure sensor input circuit is defective.	Refer to the item on judging low pressure pressure sensor failure.
1302	High pressure abnormality 1 (Heat source unit)	1. When press. sensor detects 28kg/cm ² G (2.47MPa) or more during operations (the first time), heat source unit stops once, mode is changed to restart mode after 3 minutes, then the heat source unit restarts. 2. When 30kg/cm ² G (2.94MPa) or more pressure is detected again (the second time) within 30 minutes after stop of heat source unit, error stop is observed with code No. "1302" displayed. 3. When 28kg/cm ² G (2.47MPa) or more pressure is detected 30 or more minutes after stop of heat source unit, the detection is regarded as the first time and the process shown in 1 is observed. 4. 30 minutes after stop of heat source unit is intermittent fault check period with LED displayed. 5. Error stop is observed immediately when press. switch (30 ⁺⁰ _{-1.5} kg/cm ² G (2.94 ⁺⁰ _{-1.5} MPa)) operates in addition to pressure sensor.	1) Poor operations of indoor LEV. 2) Poor operations of BC controller LEV: Heating-only, heating-principal: LEV3 3) Poor operations of BC controller SVM: Cooling-only, defrost 4) Poor operations of BC controller SVA: Cooling-only, cooling-main 5) Poor operations of BC controller SVB: Heating-only, heating-main 6) Solenoid valve SV (3 ~ 6, SV71, 72) trouble. Cooling-only, cooling-main 7) Setting error of connection address. 8) Poor operations of ball valve. 9) Short cycle of indoor unit. 10) Clogging of indoor unit filter. 11) Fall in air volume caused by dust on indoor unit fan. 12) Dust on indoor unit heat exchanger. 13) Indoor unit fan block, motor trouble. [8)~13) : Rise in high pressure caused by lowered condensing capacity in heating-only and heating-principal operation.] 14) Short cycle of heat source unit. 15) Dust on heat source unit heat exchanger. 16) Heat source unit fan block, motor trouble, poor operations of fan controller. [14)~16): Rise in high press. caused by lowered condensing capacity in cooling-only and cooling-principal operation.] 17) Poor operations of solenoid valves SV1, 2 (Bypass valves (SV1, 2) can not control rise in high pressure). 18) Thermistor trouble (TH2, TH5, TH6). 19) Pressure sensor trouble. 20) Control circuit board thermistor trouble, press. sensor input circuit trouble.	Check operations status by actually performing cooling or heating operations. Cooling : Indoor LEV LEV1, 3 (BC) SVM SVA (BC) SV3~6, SV71, 72 Heating : Indoor LEV LEV3 (BC) SVB (BC) See Trouble check of LEV and solenoid valve. Check address setting of indoor unit connector. Confirm that ball valve is fully open-ed. Check indoor unit and take measures to trouble. Check heat source unit and take measures to trouble. Check heat source unit fan See Trouble check of heat source unit fan. See Trouble check of solenoid valve. Check resistance of thermistor. Check Trouble check of pressure sensor. Check inlet temperature and press. of sensor with LED monitor.

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
1302	High pressure abnormality 2 (Heat source unit)	When press. sensor detects 1kg/cm ² G (0.098MPa) or less just before starting of operation, error stop is observed with code No. "1302" displayed.	1) Fall in internal press. caused by gas leak. 2) Press. sensor trouble. 3) Film breakage. 4) Coming off of pin in connector portion, poor contact. 5) Broken wire. 6) Press. sensor input circuit trouble on control circuit board.	See Trouble check of pressure sensor .
1500	Overcharged refrigerant abnormality	1. When liquid level of accumulator reaches AL=2 (overflow level) and Td-Tc ≤ 20 deg during operations (the first time), heat source unit stops once, mode is changed to restart mode after 3 minutes, then the unit restarts. 2. When liquid level of accumulator reaches AL=2 (overflow level) and Td-Tc ≤ 20 deg again (the second time), error stop is observed with code No."1500" displayed. 3. When liquid level of accumulator reaches AL=2 (overflow level) and Td-Tc ≤ 20 deg 30 or more minutes after stop of heat source unit, the detection is regarded as the first time and the process shown in 1. is observed.	1) Excessive refrigerant charge. 2) Broken wire of liquid level heater. 3) Poor heater output caused by control circuit board trouble.	See Refrigerant amount check.
			4) Thermistor trouble. (TH2, TH3, TH4)	Check resistance of thermistor.
			5) Thermistor input circuit trouble on control circuit board	Check temperature and pressure of sensor with LED monitor.
			6) Poor mounting of thermistor. (TH2, TH3, TH4)	
				4. 30 minutes after stop of heat source unit is intermittent fault check period with LED displayed.
1501	Lacked refrigerant abnormality Insufficient refrigerant abnormality	1. When the unit condition is as follows, the compressor is stopped (1st detection) and after 3 minutes, the compressor is restarted automatically. ① F<60Hz and TH10>85°C continuously for 60 minutes. ② F<60Hz and TH10>95°C continuously for 15 minutes. ③ F ≥ 60Hz and TH10>100°C continuously for 60 minutes. ④ F ≥ 60Hz and TH10>110°C continuously for 15 minutes. 2. If the temperature rises again as above within 2 hours after the heat source unit is stopped (2nd detection), an error stop is performed, and the check code 1501 is displayed. 3. If the temperature rises again as above within 2 hours after the heat source unit is stopped, it becomes the first detection again, and operation is the same as in 1 above. 4. The 2 hour period after the heat source unit stops is the abnormal delay period, and LED display is carried out during the abnormal stop delay.	1) Gas leakage, insufficient gas.	Refer to the item on judging the refrigerant volume.
			2) Overload operation.	Check the indoor and heat source unit operating conditions.
			3) Indoor unit LEV operation is faulty. 4) Heat source unit SLEV operation is faulty.	Actually run the equipment in cooling or heating mode and check the operating condition. Cooling : Indoor unit LEV SLEV, LEV2 Heating : Indoor unit LEV SLEV, LEV2
				Refer to the item concerning judging LEV failure.
			5) Ball valve operation is faulty.	Check with the ball valve fully open.
			6) The thermistor is faulty.	Check the thermistor's resistance.
			7) The control board's thermistor input circuit is faulty.	Check the sensor's temperature reading by the LED monitor.

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
1505	Suction pressure abnormality	Judging that the state when the suction pressure reaches 0kg/cm ² G (0MPa) during compressor operation indicates high pressure by the discharge temperature and low pressure saturation temperature, the back-up control by gas bypassing will be conducted.	<ul style="list-style-type: none"> Operation while neglecting to open ball valve. Especially for the ball valve at low pressure side. At cooling : Gas side ball valve At heating : Liquid side ball valve When plural systems are existing, the low pressure abruptly drop at indoor stopping by the erroneous wiring of transmission line (different connection of transmission line and refrigerant piping). Temporary vacuum condition due to refrigerant distribution unbalance (insufficient refrigerant of low pressure line) immediately after charging refrigerant. 	<p>Once vacuum operation protection is commenced, do not attempt to restart until taking the measures below.</p> <p><Checking method></p> <ul style="list-style-type: none"> Check ball valve for neglecting to open. Check extended piping for clogging when ball valve is opened. Check transmission line for erroneous wiring. (Confirm the correct wiring and piping connection between indoor and heat source units by operating indoor unit one by one.) <p><Countermeasure></p> <ul style="list-style-type: none"> After checking with the above method, make error reset by power source reset. Then operate for 10~15-minutes under the operation mode reverse to that when the vacuum operation protection occurred (Heating if error occurred in cooling, while cooling if it occurred in heating), and then enter into the ordinary operation state.
2000	Interlock operation	In modes other than the stop mode, the pump interlock circuit performs an abnormal stop when it has been open continuously for 10 minutes, and at that time, displays "2000." However, This is displayed when DIP SW 2-8 on the heat source unit MAIN board is OFF.	<ol style="list-style-type: none"> 1) Failure of the heat source water circulating pump to operate. 2) Disconnection 3) Connector pulled out, faulty contact. 4) Faulty interlock input circuit on the relay board. 5) Faulty interlock input circuit on the control board. 	
2134	Abnormal water temperature	<ol style="list-style-type: none"> 1. If the inlet water temperature is detected to be below 5°C or over 50°C during operation (the first time it is detected), the heat source unit is stopped temporarily, the system enters the 3-minute restart prevention mode, then restarts the heat source unit after 3 minutes. 2. If the inlet water temperature is detected to be below 5°C or over 50°C again within 30 minutes after the heat source unit stops following the operation in 1 above, (the second time it is detected), an abnormal stop is performed, and at that time, "2134" is displayed. 3. If the inlet water temperature is detected to be below 5°C or over 50°C again longer than 30 minutes after the heat source unit stops following the operation in 1 above, it is treated as having been detected the first time and operation is the same as in 1 above. 	<ol style="list-style-type: none"> 1) Failure of the heat source water circulating pump to operate. 2) Cooling tower or heating equipment out of order. 3) Clogged or dirty water heat exchanger. 	
			4) Faulty thermistor. (TH6)	Check the thermistor's resistance.
			5) Faulty thermistor input circuit on the control board.	Check the temperature picked up by the sensor by the LED monitor.
			6) Faulty thermistor installation. (TH6)	

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
2135	Freezing of the water heat exchanger.	<ol style="list-style-type: none"> 1. If the water heat exchanger freeze prevention thermostat operates (OFF at $3\pm1^{\circ}\text{C}$) (the first time) the heat source unit stops temporarily enters the 3-minute restart prevention mode, the re-starts after 3 minutes. 2. If the water heat exchanger freeze prevention thermostat operates (OFF at $3\pm1^{\circ}\text{C}$) again (the second time) within 30 minutes after the heat source units stops according to 1. above, an abnormal stop is performed and at that time, "2135" is displayed. 3. If the water heat exchanger freeze prevention thermostat operates (OFF at $3\pm1^{\circ}\text{C}$) again longer than 30 minutes after the heat source unit stops according to 1. above, it is treated as having been detected the first time and operation is the same as in 1. above. 	<ol style="list-style-type: none"> 1) Failure of the heat source water circulating pump to operate. 2) Heating equipment out of order 3) Clogged or dirty water heat exchanger 4) Lead wire to the water heat exchanger freeze prevention thermostat is disconnected. 5) Connector to the water heat exchanger freeze prevention thermostat is pulled out. 6) Faulty water heat exchanger freeze prevention thermostat input circuit on the relay board. 7) Faulty water heat exchanger freeze prevention thermostat input circuit on the control board. 	
2500	Leakage (water) abnormality	When drain sensor detects flooding during drain pump OFF.	<ol style="list-style-type: none"> 1) Water leak due to humidifier or the like in trouble. 	Check water leaking of humidifier and clogging of drain pan.
2502	Drain pump abnormality	When indirect heater of drain sensor is turned on, rise in temperature is 20 deg. or less (in water) for 40 seconds, compared with the temperature detected before turning on the indirect heater.	<ol style="list-style-type: none"> 1) Drain sensor sinks in water because drain water level rises due to drain water lifting-up mechanism trouble. 	Check operations of drain pump.
			<ol style="list-style-type: none"> 2) Broken wire of indirect heater of drain sensor. 	Measure resistance of indirect heater of drain sensor. (Normal: Approx. 82Ω between 1-3 of CN50)
			<ol style="list-style-type: none"> 3) Detecting circuit (circuit board) trouble. 	Indoor board trouble if no other problems is detected.
2503	Drain sensor abnormality	Short/open is detected during drain pump operations. (Not detected when drain pump is not operating.) Short : 90°C or more detected Open : -40°C or less detected	<ol style="list-style-type: none"> 1) Thermistor trouble. 2) Poor contact of connector. (insufficient insertion) 3) Full-broken of half-broken thermistor wire. 	Check resistance of thermistor. 0°C : $15\text{k}\Omega$ 10°C : $9.7\text{k}\Omega$ 20°C : $6.4\text{k}\Omega$ 30°C : $4.3\text{k}\Omega$
			<ol style="list-style-type: none"> 4) Indoor unit circuit board (detecting circuit) trouble. 	Check contact of connector. Indoor port trouble if no other problem is detected.
	Operation of float switch	When float switch operates (point of contact : OFF), error stop is observed with code No. "2503" displayed.	<ol style="list-style-type: none"> 1) Drain up input trouble. 2) Poor contact of float switch circuit. 3) Float switch trouble. 	Check drain pump operations. Check connect contact. Check float switch operations.
3152	Abnormal temperature inside the Inverter control box	<ol style="list-style-type: none"> 1. If the temperature inside the control box is detected to be 70°C or more during operation (the first time it is detected), the heat source unit is stopped temporarily, the system enters the 3-minute restart prevention mode, then restarts the heat source unit after 3 minutes. 2. If the temperature inside the control box is detected to be 70°C or more during operation (the second time it is detected) again within 30 minutes after the heat source unit stops according to 1. above, an abnormal stop is performed and at that time, "3152" is displayed. 3. If the temperature inside the control box is detected to be 70°C or more again during operation longer than 30 minutes after the heat source unit stops according to 1. above, it is treated as having been detected the first time and operation is the same as in 1 above. 	<ol style="list-style-type: none"> 1) Cooling air passage closed. 2) Rise in the ambient temperature. 3) Faulty power transistor. 	
			<ol style="list-style-type: none"> 4) Faulty thermistor 	Check the thermistor's resistance.
			<ol style="list-style-type: none"> 5) Faulty thermistor input circuit on the control board. 6) Faulty cooling fan, connector pulled out. 7) Faulty LEV 1 for inverter cooling, connector pulled out. 8) Faulty cooling fan output circuit on the relay board. 9) Faulty cooling fan output circuit on the control board. 10) Faulty LEV 1 output circuit for inverter cooling on the control board. 	Check the temperature picked up by the sensor using the LED monitor.

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
4103	Reverse phase abnormality	Reverse phase (or open phase) in the power system is being detected, so operation cannot be started.	1) The phases of the power supply (L1, L2, L3) have been reversed.	If there is reverse phase before the breaker, after the breaker or at the power supply terminal blocks TB1 or TB1A, reconnect the wiring.
			2) Open phase has occurred in the power supply (L1, L2, L3, N).	Check before the breaker, after the breaker or at the power supply terminal blocks TB1 or TB1A, and if there is an open phase, correct the connections. a) Check if a wire is disconnected. b) Check the voltage between each of the wires.
			3) The wiring is faulty.	Check 1 the connections, 2, the contact at the connector, 3, the tightening torque at screw tightening locations and 4 for wiring disconnections. TB1~NF~TB1A~CNTR1~F3~T01~CNTR Refer to the circuit number and the wiring diagram plate.
			4) The fuse is faulty.	If F3 or F1 on the MAIN board is melted, (Resistance between both ends of the fuse is ∞), replace the fuses.
			5) T01 is faulty.	To judge failure of the T01, go to "Individual Parts Failure Judgment Methods."
			6) The circuit board is faulty.	If none of the items in 1) to 5) is applicable, and if the trouble reappears even after the power is switched on again, replace the MAIN board (when replacing the circuit board, be sure to connect all the connectors, etc. securely).
4115	Power supply sync signal abnormality	The frequency cannot be determined when the power is switched on. (The power supply's frequency cannot be detected. The outdoor fan cannot be controlled by phase control.)	1) There is an open phase in the power supply (L1, L2, L3, N).	Check before the breaker, after the breaker or at the power supply terminal blocks TB1 or TB1A, and if there is an open phase, correct the connections.
			2) The power supply voltage is distorted.	If the power supply voltage waveform is distorted from a sine wave, improve the power supply environment.
			3) A fuse is defective.	If F1 on the MAIN board, or F3 is melted, (Resistance between both ends of the fuse is ∞), replace the fuses.
			4) T01 is defective.	To judge failure of the T01, go to "Individual Parts Failure Judgment Methods."
			5) The circuit board is defective.	If none of the items in 1) to 4) is applicable, and if the trouble reappears even after the power is switched on again, replace the MAIN board (when replacing the circuit board, be sure to connect all the connectors, ground wires, etc. securely).

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
4116	Fan speed abnormality (motor abnormality)	(Detects only for PKFY-VAM) 1. Detecting fan speed below 180rpm or over 2000rpm during fan operation at indoor unit (first detection) enters into the 3-minute restart prevention mode to stop fan for 30 seconds. 2. When detecting fan speed below 180rpm or over 2000rpm again at fan returning after 30 seconds from fan stopping, error stop (fan also stops) will be commenced displaying 4116.	1) Slipping off of fan speed detecting connector (CN33) of indoor controller board.	• Confirm slipping off of connector (CN33) on indoor controller board.
			2) Slipping off of fan output connector (FAN1) of indoor power board.	• Confirm slipping off of connector (FAN1) on indoor power board.
			3) Disconnection of fan speed detecting connector (CN33) of indoor controller board, or that of fan output connector (FAN1) of indoor power board.	• Check wiring for disconnection.
			4) Filter clogging.	• Check filter.
			5) Trouble of indoor fan motor.	• Check indoor fan motor.
			6) Faulty fan speed detecting circuit of indoor controller board, or faulty fan output circuit of indoor power board.	• When above have no trouble. 1) For trouble after operating fan. Replace indoor controller board. If not remedied, replace indoor power board. 2) For trouble without operating fan. Replace indoor power board.
4200	VDC-IDC sensor/circuit abnormality	1. If $VDC \leq 304\text{ V}$ is detected just before the inverter starts. 2. If $VDC \geq 750\text{ V}$ is detected just before starting of and during operation of the inverter.	1) Power supply voltage is abnormal.	• Check if an instantaneous power failure or power failure, etc. has occurred. • Check if the voltage is the rated voltage value.
			2) The wiring is defective.	Check 1, the connections, 2, contact at the connectors, 3 tightening torque at screw tightened portions, 4, wiring polarities, 5, for broken wires, and 6, for grounding in the following wiring. TB1A-DS-[52C, R1, R5]-[C2, C3]-TRM Wiring TRM-CNVDC Wiring * Check if the wiring polarities are as shown on the electric wiring diagram plate.
			3) The rush current prevention resistors (R1, 5) are defective.	To judge failure of R1 and R5, go to "Individual Parts Failure Judgment Methods."
			4) The electromagnetic contactor (52C) is defective.	To judge failure of the 52C, go to "Individual Parts Failure Judgment Methods."
			5) The diode stack (DS) is defective.	To judge failure of the DS, go to "Individual Parts Failure Judgment Methods."
			6) The reactor (DCL) is defective.	To judge failure of the DCL, go to "Individual Parts Failure Judgment Methods."
			7) The INV board is defective.	If none of the items in 1) to 6) is applicable, and if the trouble reappears even after the power is switched on again, replace the INV board (when replacing the circuit board, be sure to connect all the connectors, ground wires, etc. securely).

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
4210	Breaking of overcurrent	1. If $IDC \geq 103$ A peak is detected during inverter operation. 2. If the voltage of the INV board's sensor circuit input is what it should not normally be.	1) The power supply voltage is abnormal.	<ul style="list-style-type: none"> Check if an instantaneous power failure or power failure, etc. has occurred. Check if the voltage is the rated voltage value.
			2) The wiring is defective.	Check 1, the connections, 2, contact at the connectors, 3 tightening torque at screw tightened portions, 4, wiring polarities, 5, for broken wires, and 6, for grounding in the following wiring. TB1A~DS~[52C, R1, R5]~[C2, C3]~TRM Wiring TRM~CNVDC Wiring TRM~Compressor Wiring [CN2-1, CN2-2, CN2-3, CN3]~TRM Wiring * Check if the wiring polarities are as shown on the wiring diagram plate. * Check the coil resistances and insulation resistance of the compressor.
			3) The inverter/compressor is defective.	Go to "Treatment of Inverter/Compressor Related Trouble."
4220	Bus voltage abnormality	1. If $VDC \leq 400$ V is detected during inverter operation. 2. If $VDC \geq 800$ V is detected during inverter operation.	1) The power supply voltage is abnormal.	<ul style="list-style-type: none"> Check if an instantaneous stop or power failure, etc. has occurred. Check if the voltage is the rated voltage value.
			2) The wiring is defective.	Check 1, the connections, 2, contact at the connectors, 3 tightening torque at screw tightened portions, 4, wiring polarities, 5, for broken wires, and 6, for grounding in the following wiring. TB1A~DS~[52C, R1, R5]~[C2, C3]~TRM Wiring TRM~CNVDC Wiring * Check if the wiring polarities are as shown on the wiring diagram plate.
			3) The rush current prevention resistors (R1, 5) are defective.	To judge failure of R1 and R5, go to "Individual Parts Failure Judgment Methods."
			4) The electromagnetic contactor (52C) is defective.	To judge failure of the 52 C, go to "Individual Parts Failure Judgment Methods."
			5) The diode stack (DS) is defective.	To judge failure of the DS, go to "Individual Parts Failure Judgment Methods."
			6) The reactor (DCL) is defective.	To judge failure of the DCL, go to "Individual Parts Failure Judgment Methods."
			7) The inverter output is grounded.	<ul style="list-style-type: none"> Check the wiring between the TRM and the compressor. Check the compressor's insulation resistance.
			8) The circuit board is defective.	If none of the items in 1) to 7) is applicable, and if the trouble reappears even after the power is switched on again, replace the INV board (when replacing the circuit board, be sure to connect all the connectors, ground wires, etc. securely).

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
4230	Radiator panel overheat protection	If the cooling fan stays ON for 5 minutes or longer during inverter operation, and if THHS $\geq 80^{\circ}\text{C}$ is detected.	1) The wiring is defective.	Check 1 connections, 2 contact at the connectors and 3 for broken wires in the following wiring. MF1~CNFAN
			2) The INV board's fuse (F01) is defective.	If the fuse is defective, replace the fuse.
			3) The cooling fan (MF1) is defective.	To judge failure of the MF1, go to "Individual Parts Failure Judgment Methods."
			4) The THHS sensor is defective.	To judge failure of the THHS, go to error code "5110".
			5) The air passage is clogged.	If the air passage of the heat sink is clogged, clear the air passage.
			6) The INV board is defective.	If none of the items in 1) to 5) is applicable, and if the trouble reappears even after the power is switched on again, replace the INV board (when replacing the circuit board, be sure to connect all the connectors, ground wires, etc. securely).
4240	Overcurrent protection	If $\text{IDC} \geq 66.5 \text{ A}$ peak is detected continuously for 10 minutes during operation of the inverter after 5 or more seconds have passed since the inverter started.	1) Air passage short cycle.	Is the unit's exhaust short cycling?
			2) The heat exchanger is clogged.	Clean the heat exchanger.
			3) Power supply voltage.	If the power supply voltage is less than 342 V, it is outside specifications.
			4) External air temperature.	If the external air temperature is over 43°C it is outside the specifications.
			5) Capacity setting error.	<ul style="list-style-type: none"> Is the indoor unit capacity total correct? Are the heat source/indoor unit capacity settings correct?
			6) The THHS sensor is defective.	To judge failure of the THHS, go to the item for error code "5110."
			7) The solenoid valves (SV1, 2) are defective, or the solenoid valve drive circuit is defective.	To judge failure of the solenoid valve, go to "Individual Parts Failure Judgment Methods" for the "Solenoid Valve."
			8) The wiring is defective.	Check 1 connections, 2 contact at the connectors and 3 for broken wires in the following wiring. TB1A~[F1, F2]~SCRM~CN04~CNMF~MF TB1A~CNTR1 CNU~SCRM CNV~SCRM CNW~SCRM CNFC1~CNFC2
			9) Fan motor (MF) operation is defective.	Go to "Treating Fan Motor Related Trouble."
			10) The inverter/compressor is defective.	Go to "Treating Inverter/Compressor Related Trouble."
			11) The circuit board is defective.	If none of the items in 1) to 10) is applicable, and if the trouble reappears even after the power is switched on again, replace the INV board (when replacing the circuit board, be sure to connect all the connectors, ground wires, etc. securely).

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
4260	Cooling fan abnormality	If the heat sink temperature (THHS) $\geq 60^{\circ}\text{C}$ for 20 minutes or longer just before the inverter starts.	1) Same as "4230."	Same as "4230."
5101	Thermal sensor abnormality (Heat source unit)	<Other than THHS> ① A short in the thermistor or an open circuit was sensed. The heat source unit switches to the temporary stop mode with re-starting after 3 minutes, then if the temperature detected by the thermistor just before restarting is in the normal range, restarting takes place. ② If a short or open circuit in the thermistor is detected just before restarting, error code "5101", "5102", "5103", "5104", "5106", "5108", "5109" or "5112" is displayed. ③ In the 3 minute restart mode, the abnormal stop delay LED is displayed. ④ The above short or open circuit is not detected for 10 minutes after the compressor starts, or for 3 minutes during defrosting or after recovery following defrosting. <THHS> If a heat sink (THHS) temperature of $\leq -40^{\circ}\text{C}$ is detected just after the inverter starts or during inverter operation.	1) Thermistor	Check the thermistor's resistance.
5102			2) Lead wires are being pinched.	Check if the lead wires are pinched.
5103			3) Insulation is torn.	Check for tearing of the insulation.
5104			4) A connector pin is missing, or there is faulty contact.	Check if a pin is missing on the connector.
5106			5) A wire is disconnected.	Check if a wire is disconnected.
5107			Short Circuit Detection TH1 240°C or higher (0.57 kΩ) TH2 70°C or higher (1.71 kΩ) TH3 70°C or higher (1.14 kΩ) TH4 70°C or higher (1.14 kΩ) TH6 110°C or higher (0.4 kΩ) TH9 70°C or higher (1.14 kΩ) THHS 100°C or higher (1.14 kΩ) TH10 240°C or higher (0.57 kΩ) THINV 100°C or higher (0.57 kΩ)	Open Circuit Detection 15°C or lower (321 kΩ) -40°C or lower (130 kΩ) -40°C or lower (130 kΩ) -40°C or lower (130 kΩ) -40°C or lower (130 kΩ) -40°C or lower (130 kΩ) -20°C or lower (2.5 MΩ) -15°C or lower (1656 kΩ) -20°C or lower (1656 kΩ)
5109				
5110				
5112				
5111				
5111				
5111	Thermal sensor abnormality (BC controller)	1. When short (high temp. inlet) or open (low temperature inlet) of thermistor is detected during operation, error stop will be commenced displaying "5111" or "5112", "5113" or "5114", or "5115" or "5116". 2. The above detection is not made during defrosting and 3-minute after changing operation mode.	6) The thermistor input circuit on the MAIN circuit board is faulty. (In the case of the THHS, replace the INV board.)	Check the temperature picked up by the sensor using the LED monitor. If the deviation from the actual temperature is great, replace the MAIN circuit board. (In the case of the THHS, replace the INV board.)
5111			Short Circuit Detection TH1 240°C or higher (0.57 kΩ) TH2 70°C or higher (1.71 kΩ) TH3 70°C or higher (1.14 kΩ) TH4 70°C or higher (1.14 kΩ) TH6 110°C or higher (0.4 kΩ) TH9 70°C or higher (1.14 kΩ) THHS 100°C or higher (1.14 kΩ) TH10 240°C or higher (0.57 kΩ) THINV 100°C or higher (0.57 kΩ)	
5111			Open Circuit Detection 15°C or lower (321 kΩ) -40°C or lower (130 kΩ) -40°C or lower (130 kΩ) -40°C or lower (130 kΩ) -40°C or lower (130 kΩ) -40°C or lower (130 kΩ) -20°C or lower (2.5 MΩ) -15°C or lower (1656 kΩ) -20°C or lower (1656 kΩ)	
5111			Short Detected TH11 110°C or more (0.4 kΩ) TH12 110°C or more (0.4 kΩ) TH15 70°C or more (1.14 kΩ) TH16 70°C or more (0.4 kΩ)	
5111			Open Detected -40°C or less (130 kΩ) -40°C or less (130 kΩ) -40°C or less (130 kΩ) -40°C or less (130 kΩ)	

Checking code		Meaning, detecting method	Cause	Checking method & Countermeasure
5201	Pressure sensor abnormality (heat source unit)	<ol style="list-style-type: none"> 1. When pressure sensor detects 1kg/cm²G (0.098MPa) or less during operation, heat source unit once stops with 3 minutes restarting mode, and restarts if the detected pressure of pressure sensor exceeds 1kg/cm²G (0.098MPa) immediately before restarting. 2. If the detected pressure of sensor is less than 1kg/cm²G (0.098MPa) immediately before restarting, error stop is commenced displaying 5201. 3. Under 3 minutes restarting mode, LED displays intermittent fault check. 4. During 3 minutes after compressor start, defrosting and 3 minutes after defrosting operations, trouble detection is ignored. 	<ol style="list-style-type: none"> 1) Pressure sensor trouble. 2) Inner pressure drop due to a leakage. 3) Broken cover. 4) Coming off of pin at connector portion, poor contact. 5) Broken wire. 6) Faulty thermistor input circuit of MAIN board. 	See Troubleshooting of pressure sensor .
5301	IDC sensor/circuit abnormality	<ol style="list-style-type: none"> 1. If IDC \geq 20 A peak is detected just before the inverter starts, or 2. If IDC \leq 10 A peak is detected during inverter operation after 5 seconds has passed since the inverter started when the INV board's SW1-1 is OFF. 	<ol style="list-style-type: none"> 1) Contact is faulty. 2) The current sensor (DCCT) is connected with reverse polarity. 3) An error was made in the SW1-1 setting. 4) The INV board is defective. The current sensor (DCCT) is defective 	<p>Check the contacts of CNCT on the INV board.</p> <p>Check the DCCT polarity.</p> <ul style="list-style-type: none"> • With SW1-1 OFF, is the inverter's output wiring open? • With SW1-1 OFF, is a compressor which is not specified for this model connected to the inverter's output? <p>If none of the items in 1) to 3) is applicable, and if the trouble reappears even after the power is switched on again, replace the INV board and the DCCT (when replacing the circuit board, be sure to connect all the connectors, ground wires, etc. securely) by the following procedure.</p> <ol style="list-style-type: none"> ① Replace the INV board only. If it recovers, the INV board is defective. ② If it does not recover, reinstall the INV board and replace the DCCT. If it recovers, the DCCT is defective. <p>If it does not recover after ① and ② above, both the INV board and the DCCT are defective.</p>
7130	Different indoor model connected abnormality	An exclusive R22 refrigerant indoor unit was connected to a R407C refrigerant heat source unit.	<ol style="list-style-type: none"> 1) An error was made in the MAIN board of the heat source unit (replaced with the wrong circuit board). 2) An error was made in selecting the indoor unit (installation error). 3) An error was made in the indoor unit's circuit board (replaced with the wrong circuit board).. 	<p>If the model name plate on the heat source unit says that it is an exclusive R22 model, and if error "7130" has occurred, the MAIN board for the heat source unit is a R407C model circuit board, so replace it with the MAIN board for the R22 model.</p> <p>If the model name plate for the indoor unit is an exclusive R22 model, install a unit which can also operate with R407C.</p> <p>If the model name plate on the indoor unit indicates that it is also capable of operating with R407C, and error "7130" occurs, the indoor unit's circuit board is for an exclusive R22 model, so replace it with the circuit board for a unit which is also capable of using R407C.</p>

(2) Communication/system

Checking code	Meaning, detecting method	Cause	Checking method & Countermeasure
6600	<p>Multiple address error</p> <p>Transmission from units with the same address is detected.</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>Note: The address/attribute shown on remote controller indicates the controller which has detected error.</p> </div>	<ol style="list-style-type: none"> 1) Two or more controllers of heat source unit, indoor unit, remote controller, BC controller, etc. have the same address. 2) In the case that signal has changed due to noise entered into the transmission signal. 	<p>At the generation of 6600 error, release the error by remote controller (with stop key) and start again.</p> <p>a) If the error occurs again within 5 minutes. → Search for the unit which has the same address with that of the source of the trouble.</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>When the same address is found, turn off the power source of heat source unit, BC controller, and indoor unit for 5 minutes or more after modifying the address, and then turn on it again.</p> </div> <p>b) When no trouble is generated even continuing operation over 5 minutes. → The transmission wave shape/noise on the transmission line should be investigated in accordance with <Investigation method of transmission wave shape/noise>.</p>
6602	<p>Transmission processor hardware error</p> <p>Though transmission processor intends to transmit "0", "1" is displayed on transmission line.</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>Note: The address/attribute shown on remote controller indicates the controller which has detected error.</p> </div>	<ol style="list-style-type: none"> 1) At the collision of mutual transmission data generated during the wiring work or polarity change of the transmission line of indoor or heat source unit while turning the power source on, the wave shape is changed and the error is detected. 2) 100V power source connection to indoor unit or BC controller. 3) Ground fault of transmission line. 4) Insertion of power supply connector (CN40) of plural heat source units at the grouping of plural refrigerant systems. 5) Insertion of power supply connector (CN40) of plural heat source units in the connection system with MELANS. 6) Faulty controller of unit in trouble. 7) Change of transmission data due to the noise in transmission. 8) Connection system with plural refrigerant systems or MELANS for which voltage is not applied on the transmission line for central control. 	

Checking code	Meaning, detecting method	Cause	Checking method & Countermeasure
6602	Transmission processor hardware error	<p>Checking method and processing</p> <pre> graph TD Start([Transmission line installed while turning power source on?]) -- YES --> ShutOff[Shut off the power source of heat source/ indoor units/BC controller and make it again.] Start -- NO --> CheckPower[Check power source of indoor unit.] CheckPower --> Voltage{220V ~ 240V?} Voltage -- NO --> ErrPower[Erroneous power source work] Voltage -- YES --> CheckLine[Check transmission line work and shield finish] CheckLine --> Ground{Ground fault or shield contacted with transmission line?} Ground -- YES --> ErrTrans[Erroneous transmission work] Ground -- NO --> System{System composition?} System --> Single[Single refrigerant system] System --> Plural[Plural refrigerant system] System --> MELANS[MELANS connected system] Plural --> ConfirmCN40[Confirm supply power connector CN40 of heat source unit] MELANS --> ConfirmCN40 ConfirmCN40 --> Only1{Only 1 set with CN40 inserted?} Only1 -- YES --> ModCN40[Modification of CN40 insertion method.] Only1 -- NO --> CN40Inserted{CN40 inserted?} CN40Inserted -- YES --> ReplaceCN40[Replace insertion of CN40 to CN41] CN40Inserted -- NO --> InvestNoise[Investigation of transmission line noise] Single --> InvestNoise InvestNoise --> NoiseExist{Noise exist?} NoiseExist -- YES --> InvestCause[Investigation of the cause of noise] NoiseExist -- NO --> FaultyController[Faulty controller of generating unit] InvestCause --> ModFaulty[Modification of faulty point] FaultyController --> ModFaulty ShutOff --> ModFaulty ErrPower --> ModFaulty ErrTrans --> ModFaulty ReplaceCN40 --> ModFaulty </pre> <p>* For the investigation method, follow <Investigation method of transmission wave shape/noise></p>	
6603	<p>Transmission circuit bus-busy error</p> <ol style="list-style-type: none"> Collision of data transmission: Transmission can not be performed for 4~10 consecutive minutes due to collision of data transmission. Data can not be transmitted on transmission line due to noise for 4~10 consecutive minutes. <p>Note: The address/attribute shown on remote controller indicates the controller which has detected error.</p>	<ol style="list-style-type: none"> As the voltage of short frequency like noise is mixed in transmission line continuously, transmission processor can not transmit. Faulty controller of generating unit. 	<p>a) Check transmission wave shape/noise on transmission line by following <Investigation method of transmission wave shape/noise>.</p> <ul style="list-style-type: none"> → No noise indicates faulty controller of generating unit. → Noise if existed, check the noise.

Checking code	Meaning, detecting method	Cause	Checking method & Countermeasure
6606	<p>Communications with transmission processor error</p> <p>Communication trouble between apparatus processor and transmission processor.</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> <p>Note: The address/attribute shown on remote controller indicates the controller which has detected error.</p> </div>	<p>1) Data is not properly transmitted due to casual erroneous operation of the generating controller.</p> <p>2) Faulty generating controller.</p>	<p>Turn off power sources of indoor unit, BC controller and heat source unit.</p> <p>(When power sources are turned off separately, microcomputer is not reset and normal operations can not be restored.)</p> <p>→ Controller trouble is the source of the trouble when the same trouble is observed again.</p>

Checking code	Meaning, detecting method				
6607	No ACK error		When no ACK signal is detected in 6 continuous times with 30 second interval by transmission side controller, the transmission side detects error.		
			Note: The address/attribute shown on remote controller indicates the controller not providing the answer (ACK).		
System composition	Generating unit address	Display of trouble	Detecting method	Cause	Checking method & countermeasure
(1) Single refrigerant system	① Heat source unit (OC)	Remote controller (RC)	No reply (ACK) at BC transmission to OC	1) Poor contact of transmission line of OC or BC. 2) Damping of transmission line voltage/signal by acceptable range of transmission wiring exceeded. <div style="border: 1px solid black; padding: 2px; margin: 5px 0;"> Farthest : Less than 200m Remote controller wiring : Less than 10m </div> 3) Erroneous sizing of transmission line (Not within the range below). Wire diameter : 1.25mm ² or more 4) Faulty control circuit board of OC.	Shut down OC unit power source, and make it again. It will return to normal state at an accidental case. When normal state can not be re-covered, check for the 1) ~ 4) of the cause.
	② BC controller (BC)	Remote controller (RC)	No reply (ACK) at IC transmission to BC	1) When Fresh Master address is changed or modified during operation. 2) Faulty or slipping off of transmission wiring of BC controller. 3) Slipping off of BC unit connector (CN02). 4) Faulty BC controller circuit board.	Shut down both OC and BC power sources simultaneously for 5 minutes or more, and make them again. It will return to normal state at an accidental case. When normal state can not be re-covered, check for the 1) ~ 4) of the cause.
	③ Indoor unit (IC)	Remote controller (RC)	No reply (ACK) at RC transmission to IC	1) When IC unit address is changed or modified during operation. 2) Faulty or slipping off of transmission wiring of IC. 3) Slipping off of IC unit connector (CN2M). 4) Faulty IC unit controller. 5) Faulty remote controller.	Shut down both OC and BC power sources simultaneously for 5 minutes or more, and make them again. It will return to normal state at an accidental case. When normal state can not be re-covered, check for the 1) ~ 4) of the cause.
	④ Remote controller (RC)	Remote controller (RC)	No reply (ACK) at IC transmission to RC	1) Faulty transmission wiring at IC unit side. 2) Faulty transmission wiring of RC. 3) When remote controller address is changed or modified during operation. 4) Faulty remote controller.	Shut down OC power sources for 5 minutes or more, and make it again. It will return to normal state at an accidental case. When normal state can not be re-covered, check for the 1) ~ 4) of the cause.

Checking code	Meaning, detecting method				
6607 (continued)	No ACK error		When no ACK signal is detected in 6 continuous times with 30 second interval by transmission side controller, the transmission side detects error.		
			Note: The address/attribute shown on remote controller indicates the controller not providing the answer (ACK).		
System composition	Generating unit address	Display of trouble	Detecting method	Cause	Checking method & countermeasure
(2) Group operation system using plural refrigerants	① Heat source unit (OC)	Remote controller (RC)	No reply (ACK) at BC transmission to OC	As same that for single refrigerant system.	Same as measure for single refrigerant system.
	② BC controller (BC)	Remote controller (RC)	No replay (ACK) at IC transmission to BC	As same that for single refrigerant system.	Same as measure for single refrigerant system.
	③ Indoor unit (IC)	Remote controller (RC)	No reply (ACK) at RC transmission to IC	1) Cause of 1) ~ 5) of "Cause for single refrigerant system". 2) Slipping off or short circuit of transmission line of OC terminal block for centralized control (TB7). 3) Shut down of OC unit power source of one re-frigerant system. 4) Neglecting insertion of OC unit power supply connector (CN40). 5) Inserting more than 2 sets of power supply connector (CN40) for centralized control use. For generation after normal operation conducted once, the following causes can be considered. <ul style="list-style-type: none"> • Total capacity error (7100) • Capacity code setting error (7101) • Connecting set number error (7102) • Address setting error (7105) 	a) Shut down the power source of both IC and OC for over 5 minutes simultaneously, and make them again. Normal state will be returned incase of accidental trouble. b) Check for 1) ~ 5) of causes. If cause is found, remedy it. c) Check other remote controller or OC unit LED for troubleshooting for trouble. Trouble → Modify the trouble according to the content of check code. No trouble → Faulty indoor controller
	④ Remote controller (RC)	Remote controller (RC)	No reply (ACK) at IC transmission to RC	1) Cause of 1) ~ 3) of "Cause for single refrigerant system". 2) Slipping off or short circuit of transmission line of OC terminal block for centralized control (TB7). 3) Shut down of OC unit power source of one refrigerant system. 4) Neglecting insertion of OC unit power supply connector (CN40). 5) Inserting more than 2 sets of power supply connector (CN40) for centralized control use. At generation after normal operation conducted once, the following causes can be considered. <ul style="list-style-type: none"> • Total capacity error (7100) • Capacity code setting error (7101) • Connecting set number error (7102) • Address setting error (7105) 	a) Shut down the power source of OC for over 5 minute, and make it again. Normal state will be returned in case of accidental trouble. b) Check for 1) ~ 5) of causes. If cause is found, remedy it. When normal state can not be obtained, check 1) ~ 5) of causes.

Checking code	Meaning, detecting method				
6607 (continued)	No ACK error		When no ACK signal is detected in 6 continuous times with 30 second interval by transmission side controller, the transmission side detects error. <div>Note: The address/attribute shown on remote controller indicates the controller not providing the answer (ACK).</div>		
System composition	Generating unit address	Display of trouble	Detecting method	Cause	Checking method & countermeasure
(3) Connecting system with system controller (MELANS)	① Heat source unit (OC)	Remote controller (RC)	No reply (ACK) at BC transmission to OC	As same that for single refrigerant system.	Same countermeasure as that for single refrigerant system.
	② BC controller (BC)	Remote controller (RC)	No reply (ACK) at RC transmission to IC	Same cause of that for grouping from plural refrigerants.	Same countermeasure as that for IC unit error in plural refrigerant system.
	③ Indoor unit (IC)	Remote controller (RC)	No reply (ACK) at transmission of SC to IC	Trouble of partial IC units: 1) Same cause as that for single refrigerant system.	→ Same countermeasure as that for single refrigerant system.
				Trouble of all IC in one refrigerant system: 1) Cause of total capacity error. (7100) 2) Cause of capacity code setting error. (7101) 3) Cause of connecting number error. (7102) 4) Cause of address setting error. (7105) 5) Slipping off or short circuit of transmission line of OC unit terminal block for central control (TB7). 6) Power source shut down of OC unit. 7) Trouble of OC unit electrical system.	Confirm OC trouble diagnosis LED. → At trouble generation, check for the content according to check code. Check the content of 5)~7) shown left.
				Trouble of all IC: 1) As same that for single refrigerant system. 2) Insertion of power supply connector (CN40) into OC unit transmission line for centralized control. 3) Slipping off or power source shut down of power supply unit for transmission line. 4) Faulty system controller (MELANS).	Confirm voltage of transmission line for centralized control. • More than 20V → Confirm 1) 2) left. • Less than 20V → Confirm 3) left.
	④ Remote controller (RC)	Remote controller (RC)	No reply (ACK) at transmission of IC to RC	Same cause as that for plural refrigerant system.	Same countermeasure as that for plural refrigerant system.
			No reply (ACK) at transmission of MELANS to RC	Trouble of partial IC units: 1) Same cause of that for single refrigerant system.	→ Same countermeasure as that for single refrigerant system.
				Trouble of all IC in one refrigerant system: 1) Error detected by OC unit. Total capacity error. (7100) Capacity code setting error. (7101) Connecting number error. (7102) Address setting error. (7105) 2) Slipping off or short circuit of transmission line of OC unit terminal block for central control (TB7). 3) Power source shut down of OC unit. 4) Trouble of OC unit electrical system.	Confirm OC trouble diagnosis LED. → At trouble generation, check for the content according to check code. Check the content of 2)~4) shown left.
				Trouble of all IC: 1) As same that for single refrigerant system. 2) Insertion of power supply connector (CN40) into OC unit transmission line for centralized control. 3) Slipping off or power shutdown of power supply unit for transmission line. 4) Faulty MELANS.	Check the causes of 1) ~ 4) left.

Checking code	Meaning, detecting method				
6607 (continued)	No ACK error	When no ACK signal is detected in 6 continuous times with 30 second interval by transmission side controller, the transmission side detects error. <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> Note: The address/attribute shown on remote controller indicates the controller not providing the answer (ACK). </div>			
System composition	Generating unit address	Display of trouble	Detecting method	Cause	Checking method & countermeasure
(3) Connecting system with system controller (MELANS)	⑤ System controller (SC)	Remote controller (RC)	No reply (ACK) at transmission of IC to SC	Trouble of partial remote controller: 1) Faulty wiring of RC transmission line. 2) Slipping off or poor contact of RC transmission connector. 3) Faulty RC.	Check 1) ~ 3) left.
				Trouble of all IC in one refrigerant system. 1) Error detected by OC unit. Total capacity error (7100) Capacity code setting error (7101) Connecting number error (7102) Address setting error (7105) 2) Slipping off or short circuit of transmission line of OC unit terminal block for central control (TB7). 3) Power source shut down of OC unit. 4) Trouble of OC unit electrical system.	Confirm OC trouble diagnosis LED. → At trouble generation, check for the content according to check code. Check the content of 2) ~ 4) shown left.
				Trouble of all RC: 1) As same that for single refrigerant system. 2) Inserting supply power connector (CN40) to OC transmission line for centralized control. 3) Slipping off or power shutdown of power supply unit for transmission line. 4) Faulty MELANS.	Check the causes 1)~4) left.
No relation with system	Address which should not be existed	—	—	1) IC unit is keeping the memory of the original group setting with RC although the RC address was changed later. The same symptom will appear for the registration with SC. 2) IC unit is keeping the memory of the original interlocking registration with Fresh Master with RC although the Fresh Master address was changed later.	As some IC units are keeping the memory of the address not existing, delete the information. Employ one of the deleting method among two below. 1) Deletion by remote controller. Delete unnecessary information by the manual setting function of remote controller. 2) Deletion by connecting information deleting switch of OC unit. <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> Be careful that the use of this method will delete all the group information set with RC and all the interlocking information of Fresh Master and IC unit. </div> ① Shut down OC unit power source, and wait for 5 minutes. ② Turn on the dip switch SW2-2 provided on OC unit control circuit board. ③ Make OC unit power source, and wait for 5 minutes. ④ Shut down OC unit power source, and wait for 5 minutes. ⑤ Turn off the dip switch SW2-2 provided on OC unit control circuit board. ⑥ Make OC unit power source.

Checking code	Meaning, detecting method	Cause	Checking method & Countermeasure
6608	No response error Though acknowledgement of receipt (ACK) is received after transmission, no response command is returned. Detected as error by transmission side when the same symptom is re-peated 10 times with an interval of 3 seconds. <div style="border: 1px solid black; padding: 5px; margin-top: 10px;"> Note: The address/attribute shown on remote controller indicates the controller which has detected error. </div>	1) At the collision of mutual transmission data when transmission wiring is modified or the polarity is changed while turning the power source on, the wave shape changes detecting error. 2) Repeating of transmission error due to noise. 3) Damping of transmission line voltage/signal due to exceeding of the acceptable range for transmission wiring. • Farthest Less than 200m • RC wiring Less than 12m 4) Damping of transmission voltage/signal due to improper type of transmission line. • Wire size : More than 1.25mm ²	a) Generation at test run. Turn off the power sources of OC unit, IC unit and Fresh Master for more than 5 minutes simultaneously, and make them again. → Returning to normal state means the trouble detection due to transmission line work while powering. b) Check 3) and 4) of the causes left. c) Investigate the transmission wave shape/noise on transmission line according to <Investigation method of transmission wave shape/noise>. <div style="border: 1px solid black; border-radius: 10px; padding: 5px; margin-top: 10px; text-align: center;"> Much possibility if 6602 is generated. </div>

(3) System error

Checking code	Meaning, detecting method	Cause	Checking method & Countermeasure																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
7100	Total capacity error Total capacity of indoor units in the same refrigerant system exceeds limitations. <div>Trouble source: Heat source unit</div>	<div>1) Total capacity of indoor units in the same refrigerant system exceeds the following:<table><tr><th>Model</th><th>Total capacity</th><th>Total capacity code</th></tr><tr><td>PQRY-P200</td><td>302</td><td>62</td></tr><tr><td>PQRY-P250</td><td>378</td><td>78</td></tr></table></div> <div>2) Erroneous setting of OC model selector switch (SW3-10).<div><table><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table></div></div>	Model	Total capacity	Total capacity code	PQRY-P200	302	62	PQRY-P250	378	78																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
Model	Total capacity	Total capacity code																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
PQRY-P200	302	62																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
PQRY-P250	378	78																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				

Checking code	Meaning, detecting method	Cause	Checking method & Countermeasure
7102	Connected unit count over	2) The heat source unit address is being set to 51~100 under automatic address mode (Remote controller displays "HO"). 3) Slipping off of transmission wiring at heat source unit. 4) Short circuit of transmission line in case of 3) & 4), remote controller displays "HO".	a) Check for the model total (capacity code total) of indoor units connected.
7105	Address setting error <ul style="list-style-type: none"> Erroneous setting of OC unit address Erroneous setting of BC controller address <div style="border: 1px solid black; padding: 2px; margin-top: 5px;"> Trouble source : Heat source unit BC controller </div>	1) Setting error of Heat source unit address. The address of Heat source unit is not being set to 51~100. 2) The address of BC controller is not being set within 51~100.	Check that the address of OC unit is being set to 51~100. Reset the address if it stays out of the range, while shutting the power source off. When BC controller is out of the range, reset it while shutting the power source of both OC unit and BC controller off.
7107	Connection No. setting error Can not operate because connection No. of indoor unit wrongly set. <div style="border: 1px solid black; padding: 2px; margin-top: 5px;"> Trouble source : BC controller </div>	1) Indoor unit capacity per connector joint is exceeded as follows: Single connection : 81 or more Two connection joint : 161 or more Three connection joint : 241 or more Four connection joint : 321 or more 2) Four or more indoor units are set for the same connection. 3) The smallest connection No. has not been set when used at joint.	a) Check indoor unit connection No. in refrigerant circuit. ① No four or more indoor units which are set for the same connection No. A? ② Check total capacity of indoor units which are set for the same connections No. Judged as trouble when it applies to Cause 1). ③ Check whether the smallest connection No. is set when used at joint. b) Check whether indoor unit capacity code (SW2) is wrongly set. (Keep factory shipment condition.) For erroneous switch setting, modify it, turn off the power source of heat source unit, and indoor unit simultaneously for 5 minutes or more, and then turn on.
7111	Remote control sensor error Error not providing the temperature designed to remote controller sensor. <div style="border: 1px solid black; padding: 2px; margin-top: 5px;"> Trouble source : Indoor unit </div>	1) In case when the old type remote controller for M-NET is used and the remote controller sensor is designed on indoor unit. (SW1-1 turned ON)	a) Replace the old remote controller by the new remote controller.
7130	Different Indoor model and BC controller connected error	A indoor unit not for the R407C (model: P●●) is connected.	Use the P●● indoor unit.

[4] LED Monitor Display


(1) How to read LED for service monitor

By setting of DIP SW1-1 ~ 1-8, the unit operating condition can be observed with the service LED on the control circuit board. (For the relation of each DIP SW to the content, see the table provided.)

As shown in the figure below, the LED consist of 7 segments is put in 4 sets side by side for numerical and graphic display.

OC	: Heat source unit	SV	: Solenoid valve	THHS	: Inverter radiator panel
IC	: Indoor unit	LEV	: Electronic expansion valve		
		COMP	: Compressor		
SW1	: Heat source unit control circuit board				
E	: Memory storage for service activities (sampling per minute)				


7 seg LED

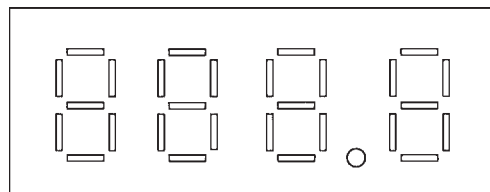

The numerical display includes that of pressure, temperature or the like, while the graphic display includes that of operating condition, solenoid valve ON/OFF state or the like.


- Numerical display

Example : display at 18.8kg/cm²G (1.84MPa) of pressure sensor data (Item No. 56)

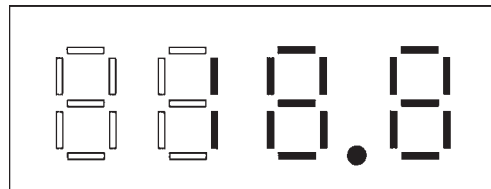

- Graphic display (Two LEDs aligned vertically express a flag.)

Example : At forcible powering in heat source unit operation display

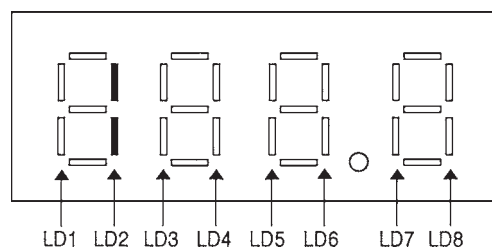

E: E2 Contents stored in the E2PROM; M: Monitored by the IC through communications; E*: Stored in service memory.

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
0	0000000000	Relay Output Display 1 (Lights up to display)	COMP Operating	Crankcase Heater ON	21S4	SV1	SV2	SV3	SV4	Lights for Normal Operation	LD8 is a relay output indicator which lights u at all times when the microcomputer's power is ON. When sending of a monitoring request to IC/BC is terminated, if there is no error, "- - -" is displayed. E*
		Check Display 1 OC Error	0 ~ 9999 Address and error code reversed								
1	1000000000	Relay Output Display 2	SV5	SV6	SV71	SV72	SV73		SSR		E*
2	0100000000	Check Display 2 (Including the IC)	0 ~ 9999 Address and error code reversed								If there is no error, "- - -" is displayed. E*
3	1100000000										
4	0010000000										
5	1010000000	Communication Demand capacity	0 ~ 9999								If no demand control, "- - -" displayed. { % } E*
6	0110000000	External Signal (Signal being input)	ON/OFF demand	Pump interlock Error							E*
7	1110000000	Heat Source Unit Operation Display	BC operating command	Warm-up mode	3 minutes restart protection mode	Compressor operating	Preliminary Error	Error			E*
8	0001000000	Indoor Unit Check	Unit No. 1	Unit No. 2	Unit No. 3	Unit No. 4	Unit No. 5	Unit No. 6	Unit No. 7	Unit No. 8	Lights up if an abnormal stop has occurred in the IC. The indicator for Unit No. 1 goes off when error reset is carried out from the smallest address. M
9	1001000000		Unit No. 9	Unit No. 10	Unit No. 11	Unit No. 12	Unit No. 13	Unit No. 14	Unit No. 15	Unit No. 16	
10	0101000000	Indoor Unit Operation Mode	Unit No. 1	Unit No. 2	Unit No. 3	Unit No. 4	Unit No. 5	Unit No. 6	Unit No. 7	Unit No. 8	Lights up during cooling. Blinks during heating. Goes off during stop and blower operation. M
11	1101000000		Unit No. 9	Unit No. 10	Unit No. 11	Unit No. 12	Unit No. 13	Unit No. 14	Unit No. 15	Unit No. 16	
12	0011000000	Indoor Unit Thermostat ON	Unit No. 1	Unit No. 2	Unit No. 3	Unit No. 4	Unit No. 5	Unit No. 6	Unit No. 7	Unit No. 8	Lights up when thermostat is ON. Goes off when thermostat is OFF. M
13	1011000000		Unit No. 9	Unit No. 10	Unit No. 11	Unit No. 12	Unit No. 13	Unit No. 14	Unit No. 15	Unit No. 16	
14	0111000000	BC All Indoor Unit Mode	Cooling-only ON	Cooling-only OFF	Heating-only ON	Heating-only OFF	Mixed ON	Mixed OFF	Fan	OFF	E*
15	1111000000	Heat Source Unit Operation Mode	Permissible Stop	Standby		Cooling-only	Cooling-main	Heating-only	Heating-main	Demand	
16	0000100000	Heat Source Unit Control Mode	Cooling-only Refrigerant Recovery	Cooling-main Refrigerant Recovery	Heating-only Refrigerant Recovery	Heating-main Refrigerant Recovery	Cooling-only Oil Recovery	Cooling-main Oil Recovery	Heating-only Oil Recovery	Heating-main Oil Recovery	
17	1000100000	Preliminary Error in Heat Source Unit	High Pressure Error 1, 2	Low Pressure Error 1	Discharge Temperature Error	Overcurrent Protection	Heat Sink Thermostat Operating	Overcurrent Break	INV Error	Over-charged Refrigerant	The flag corresponding to the item where there is an error delay lights up. E*
18	0100100000		Suction pressure Error	Configuration Detection Error	Comp. temperature Error	Water heat exchanger frost Error	Water temperature Error		Pump interlock Error		
19	1100100000		TH1 Error	TH2 Error	TH3 Error	TH4 Error		TH6 Error	HPS Error	THHS Error	
20	0010100000				TH9 Error	TH10 Error		THINV Error			

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
21	1010100000	Heat Source Unit Preliminary Error History	High Pressure Error 1, 2	Low Pressure Error 1	Discharge Temperature Error	Overcurrent Protection	Heat Sink Thermostat Operation	Overcurrent Break		Over-charged Refrigerant	Lights up if an error delay has occurred between the time the power was turned on and the present time. To turn the indicators off, switch the power OFF briefly. E*
22	0110100000		Suction pressure Error	Configuration Detection Error	Comp. temperature Error	Water heat exchanger frost Error	Water temperature Error		Pump interlock Error		
23	1110100000		TH1 Error	TH2 Error	TH3 Error	TH4 Error		TH6 Error	HPS Error	THHS Error	
24	0001100000				TH9 Error	TH10 Error		THINV Error			
25	1001100000	Error History 1	0 ~ 9999								The error and error delay code are displayed. If the address and error code are shown in reverse, or there is no error, “- - -” is displayed. E
26	0101100000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								If there is no error, “- - -” is displayed. E
27	1101100000	Error History 2	0 ~ 9999								E
28	0011100000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
29	1011100000	Error History 3	0 ~ 9999								
30	0111100000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
31	1111100000	Error History 4	0 ~ 9999								
32	0000010000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
33	1000010000	Error History 5	0 ~ 9999								
34	0100010000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
35	1100010000	Error History 6	0 ~ 9999								
36	0010010000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
37	1010010000	Error History 7	0 ~ 9999								
38	0110010000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
39	1110010000	Error History 8	0 ~ 9999								
40	0001010000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
41	1001010000	Error History 9	0 ~ 9999								
42	0101010000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
43	1101010000	Error History 10	0 ~ 9999								
44	0011010000	Inverter Error Detail	Inverter Error Detail (1 ~ 9)								
45	1011010000	Type of Inverter Error Preliminary (Details of the inverter error in No. 17)	0 ~ 9999								If there is no error, “- - - -” is always overwritten. E*
46	0111010000	TH1 Data	-99.9 ~ 999.9								E* <div>[No. 52 THHS data are monitored by the inverter microcomputer.]</div>
47	1111010000	TH2 Data	↑								
48	0000110000	TH3 Data	↑								
49	1000110000	TH4 Data	↑								
50	0100110000										
51	1100110000	TH6 Data	-99.9 ~ 999.9								

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
52	0010110000	THHS Data	-99.9 ~ 999.9								E*
53	1010110000	HPS Data	↑								
54	0110110000	THINV Data	↑								
55	1110110000										
56	0001110000	TH9 Data	-99.9 ~ 999.9								
57	1001110000	TH10 Data	↑								
58	0101110000	LPS Data	↑								
59	1101110000	α OC	0 ~ 9.999								
60	0011110000	α OC*	↑								
61	1011110000	Accumulator Level α OC*	① and ② below are displayed alternately at every 5 seconds. ① Accumulator Level: 0~9 (“AL=” is also displayed), ② α OC*: 0~9.999								
62	0111110000	HzAK Increase/ Decrease	Δ Hz —	Δ Hz 0	Δ Hz +	—	—	Δ AK —	Δ AK 0	Δ AK +	
63	1111110000	Difference from Target Tc (Tcm-Tc)	Low -3 deg. or lower	Low -3 ~ -2 deg.	Low -2 ~ -1 deg.	Stable Region		High 1~2 deg.	High 2~3 deg.	High 3 deg or higher	
64	0000001000	Difference from Target Te (Tem-Te)	Low -3 deg. or lower	Low -3 ~ -2 deg.	Low -2 ~ -1 deg.	Stable Region		High 1~2 deg.	High 2~3 deg.	High 3 deg or higher	
65	1000001000	Tc	-99.9 ~ 999.9								
66	0100001000	Te	↑								
67	1100001000	Tcm	↑								
68	0010001000	Tem	↑								
69	1010001000	Comp Frequency	0 ~ 9999								Control Frequency E*
70	0110001000	INV Output Frequency	↑								Frequency actually out- put from the inverter. E*
71	1110001000	AK	↑								E*
72	0001001000	SLEV	↑								
73	1001001000										
74	0101001000	LEV2	0 ~ 9999								
75	1101001000	DC Trunk Line Current	-99.9 ~ 999.9								(M) Monitored by the inverter's microcomputer.
76	0011001000	OC Address	0 ~ 9999								
77	1011001000	IC1 Address/ Capacity Code	0 ~ 99				0 ~ 99				E On the left (LD1~LD4), the IC address, and on the right (LD5~LD8), the capacity code is displayed (displayed alternately every 1 minute).
78	0111001000	IC2 Address/ Capacity Code	↑				↑				
79	1111001000	IC3 Address/ Capacity Code	↑				↑				
80	0000101000	IC4 Address/ Capacity Code	↑				↑				
81	1000101000	IC5 Address/ Capacity Code	↑				↑				
82	0100101000	IC6 Address/ Capacity Code	↑				↑				

When there is an error stop with No95-121, the data on error stops or the data immediately before the error postponement stop, which is stored in service memory, are displayed.

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
83	1100101000	IC7 Address/ Capacity Code	0 ~ 99				0 ~ 99				E On the left (LD1~LD4), the IC address, and on the right (LD5~LD8), the capacity code is displayed (displayed alternately every 5 seconds).
84	0010101000	IC8 Address/ Capacity Code	↑				↑				
85	1010101000	IC9 Address/ Capacity Code	↑				↑				
86	0110101000	IC10 Address/ Capacity Code	0 ~ 9999								
87	1110101000	IC11 Address/ Capacity Code	↑								
88	0001101000	IC12 Address/ Capacity Code	↑								
89	1001101000	IC13 Address/ Capacity Code	↑								
90	0101101000	IC14 Address/ Capacity Code	↑								
91	1101101000	IC15 Address/ Capacity Code	↑								
92	0011101000	IC16 Address/ Capacity Code	↑								
93	1011101000	COMP Operation Time, Higher order 4 digits	↑								E*
94	0111101000	Lower order 4 digits	↑								
95	1111101000	Heat Source Unit Operation\Mode	Permissible Stop	Standby	Defrost	Cooling-only	Cooling-main	Heating-only	Heating-main	De-mand	E
96	0000011000	Heat Source Unit Control Mode	Cooling-only Refrigerant Recovery	Cooling-main Refrigerant Recovery	Heating-only Refrigerant Recovery	Heating-main Refrigerant Recovery	Cooling-only Oil Recovery	Cooling-main Oil Recovery	Heating-only Oil Recovery	Heating-main Oil Recovery	
97	1000011000	Relay Output Display 1 Lighting Display	COMP Operating	Crankcase Heater ON	21S4	SV1	SV2	SV3	SV4		
98	0100011000	TH1 Data	-99.9 ~ 999.9								
99	1100011000	TH2 Data	↑								
100	0010011000	TH3 Data	↑								
101	1010011000	TH4 Data	↑								
102	0110011000	LEV2 Data	0 ~ 9999								
103	1110011000	TH6 Data	-99.9 ~ 999.9								
104	0001011000	HPS Data	↑								
105	1001011000	THHS Data	↑								
106	010101100	THINV Data	↑								
107	1101011000										
108	0011011000	TH9 Data	-99.9 ~ 999.9								
109	1011011000	TH10 Data	↑								
110	0111011000	LPS Data	↑								
111	1111011000	α OC	0 ~ 9.999								

When there is an error stop with No95-121, the data on error stops or the data immediately before the error postpone-ment stop, which is stored in service memory, are displayed.

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
112	0000111000	α OC*	0 ~ 9.999								E
113	1000111000	Tc	-99.9 ~ 999.9								
114	0100111000	Te	↑								
115	1100111000	Configuration Correction Value	0 ~ 9999								
116	0010111000	INV Output Frequency	↑								
117	1010111000	AK	↑								
118	0110111000	SLEV	↑								
119	1110111000	Relay out put Display2 lighting Display	SV5	SV6	SV71	SV72	SV73		SSR		
120	0001111000	DC Trunk Line Current	-99.9 ~ 999.9								
121	1001111000	Heat Source Unit Operation Display	BC operating command	Warm-up mode	3-minute Re-start protection mode	Compressor Operating	Preliminary Error	Error			
122	0101111000	BC All Indoor Unit Mode	Cooling-only ON	Cooling-only OFF	Heating-only ON	Heating-only OFF	Mixed ON	Mixed OFF	Fan	Stop	
123	1101111000										
124	0011111000										
125	1011111000										
126	0111111000										
127	1111111000	Elapsed Time for CS Circuit Closed Detection	0 ~ 9999								Above 9999, 9999 is displayed.
128	0000000100	BC TH 11 Data	-99.9 ~ 999.9								M
129	1000000100	IBC TH 12 Data	↑								
130	0100000100										
131	1100000100										
132	0010000100	BC TH 15 Data	-99.9 ~ 999.9								
133	1010000100	BC TH 16 Data	↑								
134	0110000100	BC P1 Data	↑								
135	1110000100	BC P3 Data	↑								
136	0001000100	BC SC 11 Data	↑								
137	1001000100	BC SH 12 Data	↑								
138	0101000100										
139	1101000100	BC SC 16 Data	-99.9 ~ 999.9								

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
140	0011000100	BC LEV 1 Data	-99.9 ~ 999.9								M
141	1011000100	BC LEV 3 Data	↑								
142	0111000100										
143	1111000100										
144	0000100100	IC1 liquid Pipe Temperature	-99.9 ~ 999.9								M
145	1000100100	IC2 liquid Pipe Temperature	↑								
146	0100100100	IC3 liquid Pipe Temperature	↑								
147	1100100100	IC4 liquid Pipe Temperature	↑								
148	0010100100	IC5 liquid Pipe Temperature	↑								
149	1010100100	IC6 liquid Pipe Temperature	↑								
150	0110100100	IC7 liquid Pipe Temperature	↑								
151	1110100100	IC8 liquid Pipe Temperature	↑								
152	0001100100	IC9 liquid Pipe Temperature	↑								
153	1001100100	IC10 liquid Pipe Temperature	↑								
154	0101100100	IC11 liquid Pipe Temperature	↑								
155	1101100100	IC12 liquid Pipe Temperature	↑								
156	0011100100	IC13 liquid Pipe Temperature	↑								
157	1011100100	IC14 liquid Pipe Temperature	↑								
158	0111100100	IC15 liquid Pipe Temperature	↑								
159	1111100100	IC16 liquid Pipe Temperature	↑								
160	0000010100	IC1 Gas Pipe Temperature	↑								
161	1000010100	IC2 Gas Pipe Temperature	↑								
162	0100010100	IC3 Gas Pipe Temperature	↑								
163	1100010100	IC4 Gas Pipe Temperature	↑								
164	0010010100	IC5 Gas Pipe Temperature	↑								
165	1010010100	IC6 Gas Pipe Temperature	↑								

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
166	0110010100	IC7 Gas Pipe Temperature	-99.9 ~ 999.9								M
167	1110010100	IC8 Gas Pipe Temperature	↑								
168	0001010100	IC9 Gas Pipe Temperature	↑								
169	1001010100	IC10 Gas Pipe Temperature	↑								
170	0101010100	IC11 Gas Pipe Temperature	↑								
171	1101010100	IC12 Gas Pipe Temperature	↑								
172	0011010100	IC13 Gas Pipe Temperature	↑								
173	1011010100	IC14 Gas Pipe Temperature	↑								
174	0111010100	IC15 Gas Pipe Temperature	↑								
175	1111010100	IC16 Gas Pipe Temperature	↑								
176	0000110100	IC1 SH	↑								M
177	1000110100	IC2 SH	↑								
178	0100110100	IC3 SH	↑								
179	1100110100	IC4 SH	↑								
180	0010110100	IC5 SH	↑								
181	1010110100	IC6 SH	↑								
182	0110110100	IC7 SH	↑								
183	1110110100	IC8 SH	↑								
184	0001110100	IC9 SH	↑								
185	1001110100	IC10 SH	↑								
186	0101110100	IC11 SH	↑								
187	1101110100	IC12 SH	↑								
188	0011110100	IC13 SH	↑								
189	1011110100	IC14 SH	↑								
190	0111110100	IC15 SH	↑								
191	1111110100	IC16 SH	↑								
192	0000001100	IC1 SC	↑								M
193	1000001100	IC2 SC	↑								
194	0100001100	IC3 SC	↑								
195	1100001100	IC4 SC	↑								
196	0010001100	IC5 SC	↑								
197	1010001100	IC6 SC	↑								
198	0110001100	IC7 SC	↑								
199	1110001100	IC8 SC	↑								

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
200	0001001100	IC9 SC	-99.9 ~ 999.9								M
201	1001001100	IC10 SC	↑								
202	0101001100	IC11 SC	↑								
203	1101001100	IC12 SC	↑								
204	0011001100	IC13 SC	↑								
205	1011001100	IC14 SC	↑								
206	0111001100	IC15 SC	↑								
207	1111001100	IC16 SC	↑								
208	0000101100	IC1 LEV Opening pulse	0 ~ 9999								M
209	1000101100	IC2 LEV Opening pulse	↑								
210	0100101100	IC3 LEV Opening pulse	↑								
211	1100101100	IC4 LEV Opening pulse	↑								
212	0010101100	IC5 LEV Opening pulse	↑								
213	1010101100	IC6 LEV Opening pulse	↑								
214	0110101100	IC7 LEV Opening pulse	↑								
215	1110101100	IC8 LEV Opening pulse	↑								
216	0001101100	IC9 LEV Opening pulse	↑								
217	1001101100	IC10 LEV Opening pulse	↑								
218	0101101100	IC11 LEV Opening pulse	↑								
219	1101101100	IC12 LEV Opening pulse	↑								
220	0011101100	IC13 LEV Opening pulse	↑								
221	1011101100	IC14 LEV Opening pulse	↑								
222	0111101100	IC15 LEV Opening pulse	↑								
223	1111101100	IC16 LEV Opening pulse	↑								
224	0000011100	IC1 Operation Mode/ Branch Number	0: Stop 1: Fan 2: Cooling 3: Heating 4: Dry				0 ~ 99				M On the left (LD1~LD4), the IC address, and on the right (LD5~LD8), the capacity code is displayed (displayed alternately every 5 seconds).
225	1000011100	IC2 Operation Mode/ Branch Number									
226	0100011100	IC3 Operation Mode/ Branch Number									
227	1100011100	IC4 Operation Mode/ Branch Number									
228	0010011100	IC5 Operation Mode/ Branch Number									

No	SW1	Item	Display								Remarks
	12345678910		LD1	LD2	LD3	LD4	LD5	LD6	LD7	LD8	
229	10100111000	IC6 Operation Mode/ Branch Number	0: Stop 1: Fan 2: Cooling 3: Heating 4: Dry					0 ~ 99		M On the left (LD1~LD4), the IC address, and on the right (LD5~LD8), the capacity code is displayed (displayed alternately every 5 seconds).	
230	01100111100	IC7 Operation Mode/ Branch Number									
231	11100111000	IC8 Operation Mode/ Branch Number									
232	00010111100	IC9 Operation Mode/ Branch Number									
233	10010111100	IC10 Operation Mode/ Branch Number									
234	01010111100	IC11 Operation Mode/ Branch Number									
235	11010111100	IC12 Operation Mode/ Branch Number									
236	00110111100	IC13 Operation Mode/ Branch Number									
237	10110111100	IC14 Operation Mode/ Branch Number									
238	01110111100	IC15 Operation Mode/ Branch Number									
239	11110111100	IC16 Operation Mode/ Branch Number									
240	00001111100	IC1 Filter	0 ~ 9999							M	
241	10001111100	IC2 Filter	↑								
242	01001111100	IC3 Filter	↑								
243	11001111100	IC4 Filter	↑								
244	00101111100	IC5 Filter	↑								
245	10101111100	IC6 Filter	↑								
246	01101111100	IC7 Filter	↑								
247	11101111100	IC8 Filter	↑								
248	00011111100	IC9 Filter	↑								
249	10011111100	IC10 Filter	↑								
250	01011111100	IC11 Filter	↑								
251	11011111100	IC12 Filter	↑								
252	00111111100	IC13 Filter	↑								
253	10111111100	IC14 Filter	↑								
254	01111111100	IC15 Filter	↑								
255	11111111100	IC16 Filter	↑								

[8] PREPARATION, REPAIRS AND REFRIGERANT REFILLING WHEN REPAIRING LEAKS


[1] Location of leaks: Extension piping or indoor units (when cooling)

- ① Attach a pressure gage to the low-pressure servicing check joint (CJ2).
- ② Stop all of the indoor units. When the compressor has stopped, shut off the liquid ball valve (BV2) for the heat source unit.
- ③ Stop all of the indoor units. When the compressor has stopped, turn the SW3-6 switch on the main board for the heat source unit to ON. (This will start the pump down operation causing all of the indoor units to enter the cooling mode.)
- ④ While in the pump down operation (SW3-6 ON), the low pressure (LPS) will reach below at least 2 kg/cm²G (0.20 MPa) or the indoor unit and the compressor will automatically shut down within 15 minutes of starting the pump down operation. Shut down all of the indoor units and the compressor if the pressure gage for the low-pressure servicing joint (CJ2) reads 1.5 kg/cm²G (0.15 MPa) or after running the pump down operation for 20 minutes.
- ⑤ Shut off the gas ball valve (BV1) for the heat source unit.
- ⑥ Remove any refrigerant remaining in the extension piping and the indoor units.
Be sure to recover the refrigerant without releasing it into the air.
- ⑦ Repair the location of the leak.
- ⑧ After repairing the leak, create a vacuum to remove any air from inside of the extension piping or the indoor units.
- ⑨ Open the ball valves for the heat source unit (BV1 and BV2), turn the SW3-6 switch to OFF, adjust refrigerant levels and confirm proper circulation.

[2] Location of leaks: Heat Source Unit (Cooling mode)

- ① Test run all indoor units in cooling mode.
 1. With SW3-1 on the MAIN board of the heat source unit set to ON and SW3-2 OFF → ON to test run all indoor units.
 2. Change the remote controller settings so that all indoor units run in cooling mode.
 3. Check that all indoor units are running in cooling mode.
- ② Check the Tc and SC16 data.
(The LED monitor switch (SW1) on the MAIN board of the heat source unit can be used to display this data on the LED.)
 1. If SC16 is 10 degrees or more Continue to step ③.
 2. If SC16 is less than 10 degrees After stopping the compressor, remove any refrigerant, repair the leak point, then extract the air to create a vacuum and refill with new refrigerant (same procedure as 4. Location of leaks: Heat source unit (when heating)).

[Tc LED monitor switch]



[SC16 LED monitor switch]



- ③ Stop all indoor units and the compressor.
 1. With SW3-1 on the MAIN board of the heat source unit set to ON and SW3-2 ON → OFF to stop all indoor units and the compressor.
 2. Check that all indoor units have been stopped.
- ④ Close both ball valves (BV1 and BV2).
- ⑤ Remove a small amount of refrigerant from the liquid ball valve (BV2) check joint. If this operation is not performed, remaining refrigerant may cause the unit to malfunction.
- ⑥ Remove any refrigerant remaining in the heat source unit.
Reclaim the refrigerant; do not discharge it into the air.
- ⑦ Repair the leak point.
- ⑧ After the leak point is repaired, change the dryer and extract all of the air from the heat source unit to create a vacuum.
- ⑨ Open both ball valves (BV1 and BV2) on the heat source unit, then adjust the refrigerant amount and verify that the refrigerant is circulating properly.


[3] Location of Leaks: Extension Piping or Indoor Units (Heating mode)

- ① Test run all indoor units in heating mode.
 1. With SW3-1 on the MAIN board of the heat source unit set to ON and SW3-2 OFF → ON to test run all indoor units.
 2. Change the remote controller settings so that all indoor units run in heating mode.
 3. Check that all indoor units are running in heating mode.
- ② Stop all indoor units and the compressor.
 1. With SW3-1 on the MAIN board of the heat source unit set to ON and SW3-2 ON → OFF to stop all indoor units and the compressor.
 2. Check that all indoor units have been stopped.
- ③ Close both ball valves (BV1 and BV2).
- ④ Remove any refrigerant remaining in the extension piping or the indoor units.
Reclaim the refrigerant; do not discharge it into the air.
- ⑤ Repair the leaks.
- ⑥ After the leaks are repaired, extract all air from the extension piping and the indoor units to create a vacuum.
Then, open both ball valves (BV1 and BV2), then adjust the refrigerant amount and verify that the refrigerant is circulating properly.

[4] Location of Leaks: Heat Source Unit (when Heating)

- ① Remove any refrigerant from the entire system (heat source unit, extension piping and indoor units).
Reclaim the refrigerant; do not discharge it into the air.
- ② Repair the leaks.
- ③ After the leaks are repaired, replace the dryer with a new one and extract all of the air from the entire system to create a vacuum. Then, refill with refrigerant until it reaches the calculated specification (heat source unit + extension piping + indoor units). Refer to “Chapter 6” for more details.

9 CHECK THE COMPOSITION OF THE REFRIGERANT

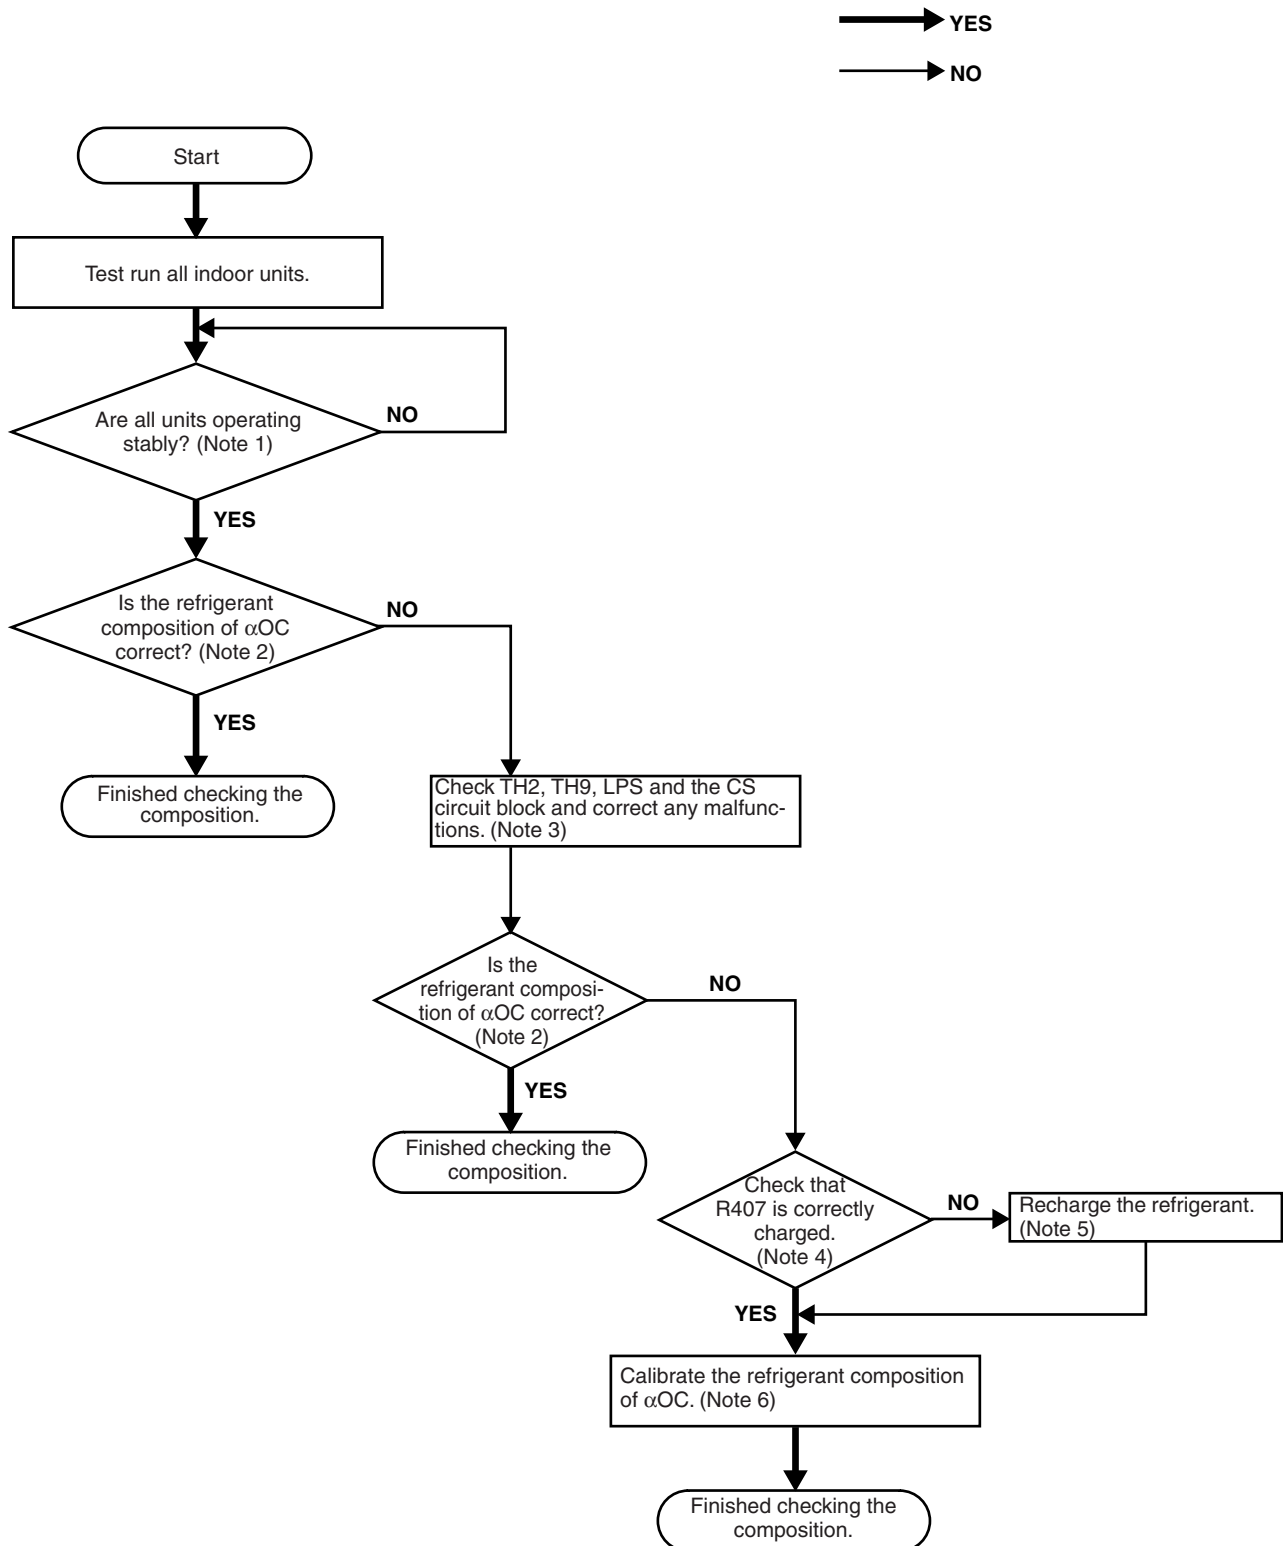

Note 1 Wait until the units stabilize as described in the refrigerant amount adjustment procedure in “Chapter 6”.

Note 2 After the units are operating stably, check that the refrigerant composition of α OC is within the following ranges, indicating that the composition check is finished.

If the accumulator liquid level AL = 0 when cooling: α OC = 0.20 ~ 0.26

If the accumulator liquid level AL = 1 when cooling: α OC = 0.23 ~ 0.34

When heating: α OC = 0.25 ~ 0.34

(The self-diagnosis switch (SW1) on the main board of the heat source unit can be used to display this data on the LED.)

[α OC self-diagnosis switch]



Note 3 TH2 and TH9: Check and make any corrections using the same method as that for a faulty temperature sensor, (refer to TROUBLESHOOTING).

LPS: Check and make any corrections using the same method as that for a faulty low pressure sensor, (refer to TROUBLESHOOTING).

CS circuit block: Set the self-diagnosis switch on the outdoor MAIN board as shown below.



- Check and make any corrections so that “0” is displayed.
- If any number other than 0 is displayed and TH2, TH9 or LPS are malfunctioning, correct them, then set SW2-9 on the MAIN board of the heat source unit from OFF to ON.
- If any number other than 0 is displayed and TH2, TH9 or LPS are not malfunctioning, replace the CS circuit if refrigerant is not flowing through it (while operating) and set SW2-9 on the MAIN board of the heat source unit from OFF to ON.

Note 4 If it can be verified that R407C was correctly charged in the liquid phase, continue to Yes. If there is a possibility that it was not charged correctly, such as with a gas charger, continue to No.

Note 5 After reclaiming the system’s refrigerant, extract the air to create a vacuum, then refill with new refrigerant. Be sure to charge in the liquid phase. In addition, be sure to change the dryer.

Note 6 After the units are operating stably, check that the refrigerant composition of α OC is within the following ranges, indicating that the circulation check is finished.

If the accumulator liquid level AL = 0 when cooling: α OC = 0.21 ~ 0.25

If the accumulator liquid level AL = 1 when cooling: α OC = 0.24 ~ 0.28

When heating: α OC = 0.27 ~ 0.31

If the refrigerant composition of α OC is not within the ranges specified above, a large error has been detected. Refer to section 1-3 in Chapter 6, then after setting SW4-1 on the MAIN board of the heat source unit to ON, calibrate the refrigerant circulation constant α OC with SW4-2 until it is within the ranges specified above.

After calibrating, keep the SW4-1 ON and finish the circulation check.

<Example calibration of the refrigerant circulation constant α OC>

Conditions: If the accumulator liquid level AL = 0 and α OC = 0.29 when cooling, α OC must be adjusted so that it is between 0.21 and 0.25.

By switching SW4-2 between ON and OFF, adjustments can be made in the following order:

0 → 3% → 6% → 9% → 12% → -6% → -3% → 0

For this example, by making an adjustment of -0.06 (-6%), α OC can be adjusted to 0.23.

1. If SW4-2 is already set to OFF, change the switch 5 times.
OFF (0.29) → ON (0.32) → OFF (0.35) → ON (0.38) → OFF (0.41) → ON (0.23)
2. If SW4-2 is already set to ON, change the switch 5 times.
ON (0.29) → OFF (0.32) → ON (0.35) → OFF (0.38) → ON (0.41) → OFF (0.23)

10 DIFFERENCES BETWEEN THE PREVIOUS REFRIGERANT AND THE NEW REFRIGERANT

[1] Chemical Characteristics

The new refrigerant (R407C) is a chemically stable non-combustible refrigerant with few of the same characteristics as R22.

However, the vapor specific gravity is heavier than the specific gravity of air, so if the refrigerant leaks out in a closed room, it remains on the bottom near the floor and there is danger of accidents occurring due to lack of oxygen, so always handle it in an atmosphere with good ventilation where the refrigerant won't accumulate.

	New refrigerant (HFC based)	Previous refrigerant (HCFC Based)
	R407C	R22
	R32/R125/R134a	R22
Composition (wt%)	(23/25/52)	(100)
Refrigerant handling	Nonazetropic refrigerant	Single refrigerant
Chlorine	Not included	Included
Safety class	A1/A1	A1
Molecular weight	86.2	86.5
Boiling point (°C)	-43.6	-40.8
Vapor pressure (25°C, MPa) (Gauge)	0.9177	0.94
Saturated vapor density (25°C, kg/m ³)	42.5	44.4
Combustibility	Noncombustible	Noncombustible
Ozone depletion coefficient (ODP) *1	0	0.055
Global warming coefficient (GWP) *2	1530	1700
Refrigerant charging method	Fluid charging	Gas charging
Additional charge when leaking	Impossible	Possible


*1: If CFC11 is used as the reference. *2: If CO2 is used as the reference.

[2] Chances in Composition

R407C is a nonazetropic refrigerant composed of 3 components, R32, R125 and R134a. Therefore, if refrigerant leaks from the gas phase unit, that containing large amounts of the R32 and R125 components will leak out, so there will be more R134a remaining in the machine, and there is a possibility that breakdown of the machine due to insufficient capacity (condensation on the heat exchanger, etc.) could result. Also, if the equipment is charged with refrigerant directly from a bombe, if it is charged in the gas phase, the composition will change greatly, so be sure to charge the equipment from the bombe's liquid phase side.

① Nonazetropic refrigerant

In both gas phases, when charging refrigerant from a bombe with refrigerants which have different compositions, the composition will change if refrigerant leaks from the unit. As an example, the change in the composition of the refrigerant is shown in the case where R407C is charged as a gas from a bombe, and in the case where it is charged as a liquid. Compared to when the refrigerant is charged as a liquid, the change in composition is great and the influence on unit performance and operating state is great, so it is necessary to charge the refrigerant in the liquid phase.

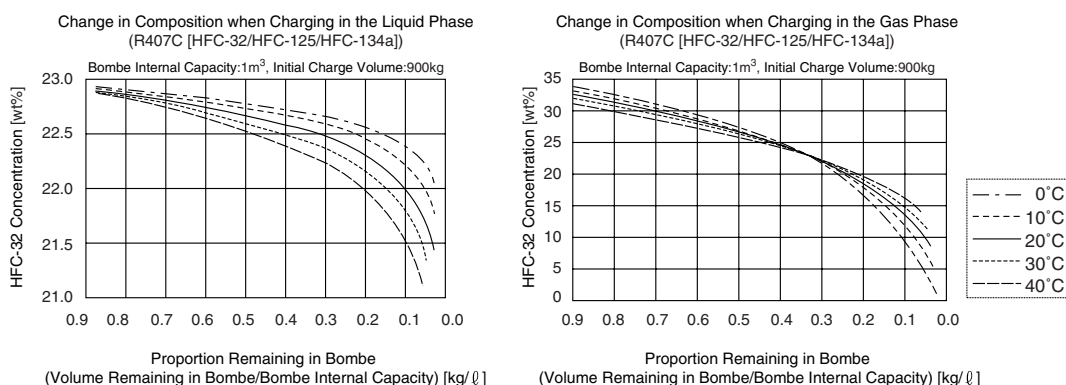

[3] Pressure Characteristics

Compared to the previous refrigerant (R22), the pressure of the new refrigerant (R407C) is higher.

Temperature (°C) \ Pressure (Gauge)	R407C	R22
	MPa (Gauge)/kgf/cm ² (Gauge)	MPa (Gauge)/kgf/cm ² (Gauge)
-20	0.18/1.8	0.14/1.4
0	0.47/4.8	0.40/4.1
20	0.94/9.6	0.81/8.3
40	1.44/14.7	1.44/14.7
60	2.44/24.9	2.33/23.8
65	2.75/28.0	2.60/26.5

Data source: Japan refrigeration and air conditioning association thermal characteristics chart NIST REFPROP V5.10. Asahi Glass, other

Note:

1. Mixing of refrigerants
R407C is a refrigerant which is a mixture of HFC32, HFC125 and HFC134a. R407C has different characteristics from R22, so absolutely do not mix them.
Also, absolutely do not add R410a to this refrigerant.
2. Moisture control
If a lot of moisture is mixed into the refrigeration system, it will cause hydrolysis of the organic materials used in the refrigerator oil or compressor motor, etc., and this could cause capillary clogging or failure of the insulation on the compressor or other components.
3. Impurities control
If a lot of dirt, air or flux are mixed into the refrigerant, it could accelerate decomposition or aging, etc. of the refrigerator oil, or could cause clogging of capillaries or failure of the compressor.

11 REFRIGERATOR OIL

[1] Refrigerator Oil with HFC Based Refrigerants

A different refrigerator oil is used with the new refrigerant than with R22.

Note:

Since the type of refrigerator oil used with R22 is different from that used with R407C, the different types of refrigerant oil should not be mixed and used together.

[2] Influence of Contaminants

With the refrigerator oil used with the new refrigerant, it is necessary to exercise greater caution concerning the mixing of contaminants than with the mineral oil used with the previous refrigerant. Therefore, it is necessary to get a sufficient grasp of the basic items in the following table to understand the harm that is caused to the refrigeration cycle from deficiencies involving the oil charging process, and to prevent contaminants from being mixed in.

Influence of oil with contaminants mixed in on the refrigeration cycle

Cause		Symptom	Influence on the refrigeration cycle	
Mixing with moisture		Freezing of expansion valves and capillaries	Clogging of expansion valves and capillaries	Cooling deficiencies
		Hydrolysis Sludge formation Generation of acids Oxidation	Compressor overheating Poor motor insulation Copper plating on sliding parts	Burnout of the motor Locking
Mixing with air		Oxidation Aging of oil	Sticking of sliding parts	
Mixing of foreign matter	Dirt, contaminants	Adhesion to the expansion valves and to capillaries	Expansion valve, capillaries Clogging of the drier	Cooling deficiencies Overheating of the compressor
		Mixing of foreign matter in the compressor	Sticking of sliding parts	
	Mineral oil, etc.	Sludge formation, adhesion	Clogging of expansion valve, capillaries	Cooling deficiencies Overheating of the compressor
		Aging of oil	Sticking of sliding parts	

Contaminants is a general term for moisture, air, process oil, dirt, other refrigerants and other refrigerator oils, etc.

Service Handbook PQRY-P200YMF-B, P250YMF-B
CMB-P104, P105, P106, P108, P1010, P1013, P1016V-E



mitsubishi electric corporation
HEAD OFFICE MITSUBISHI DENKI BLDG. MARUNOUCHI TOKYO 100-0005 TELEX J24532 CABLE MELCO TOKYO
