

Air Conditioning

Product Information


PLA-ZRP140BA : Inverter Heat Pump

R410A 4-Way Blow Ceiling Cassette System



Our wide range of Power Inverters offer customers high seasonal efficiency, advanced control options and quiet operation, whilst providing greater flexibility and ease of installation.

FEATURES

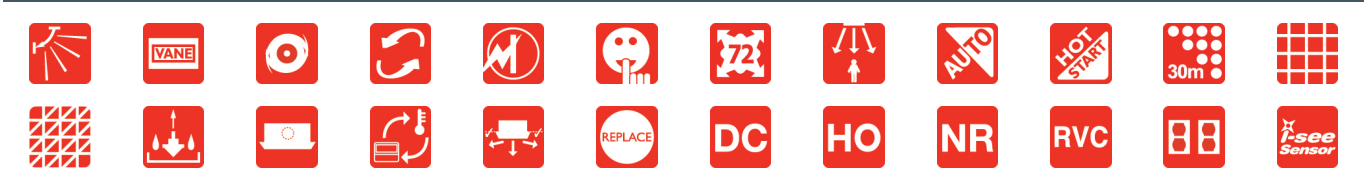

INDOOR

Heating Capacity (kW) (nominal)	16.0 (5.7 - 18)
Cooling Capacity (kW) (nominal)	13.4 (6.2 - 15)
Heating Capacity (kW) (UK)	13.6 (4.85 - 15.3)
Cooling Capacity (kW) (UK)	12.9 (5.7 - 14.1)
SHF (nominal and UK)	0.72
COP / EER (nominal)	3.40 / 3.07
SCOP / SEER	4.5 / 6
Energy Efficiency Class - Heating / Cooling	N/A / N/A
Pipe Size Gas (mm [in])	15.88 (5/8")
Pipe Size Liquid (mm [in])	9.52 (3/8")
Airflow (m³/min) Lo-Mi-Mi2-Hi	24 - 26 - 29 - 32
Sound Pressure Level (dBA) Lo-Mi-Mi2-Hi	36 - 39 - 42-44
Sound Power Level (dBA) Cooling	70
Dimensions (mm) Width x Depth x Height	840(950) x 840(950) x 298(35)



Weight (kg) Unit / grille	27 / 6
Electrical Supply	FED BY OUTDOOR UNIT
Phase	SINGLE
Fuse Rating (BS88) - HRC (A)	6
Interconnecting Cable No. Cores	4

OUTDOOR

Sound Pressure Level (dBA) Heating / Cooling	52 / 50
Sound Power Level (dBA) Cooling	70
Weight (kg)	132
Dimensions (mm) Width x Depth x Height	1050 x 330x30 x 1338
Electrical Supply	380-415V,50HZ
Phase	THREE
System Power Input (kW) - Heating / Cooling (nominal)	4.70 / 4.37
System Power Input (kW) - Heating / Cooling (UK)	4.18 / 3.71
Starting Current (A)	4
System Running Current (A) [MAX] - Heating / Cooling	8.09 / 7.68 [12.1]
Fuse Rating (BS88) - HRC (A)	16
Mains Cable No. Cores	5
Max Pipe Length (m)	75
Max Height Difference (m)	30
Charge R410A (kg) - Pre charged length (m)	5 - 30

DIMENSIONS

PLA-ZRP140BA

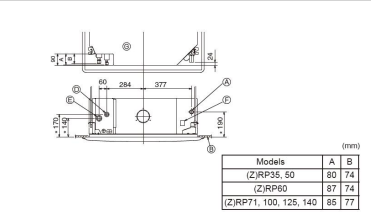


- ④ Outer side of main unit
⑤ Bolt pitch
⑥ Ceiling opening
⑦ Outer side of Grille
- ⑧ Grille
⑨ Ceiling
⑩ Multi function casement (option)
⑪ Entire periphery

* When the optional multi-functional casement is installed, add 135 mm to the dimensions marked on the figure.

Models	C	D
PLA-RP35/50/60/71BA(2) PLA-ZRP35/50/60BA	241	258
PLA-RP100/125/140BA(2) PLA-RP100BA3 PLA-ZRP71/100/125/140BA	281	298

DIMENSIONS

PUHZ-ZRP140YKA

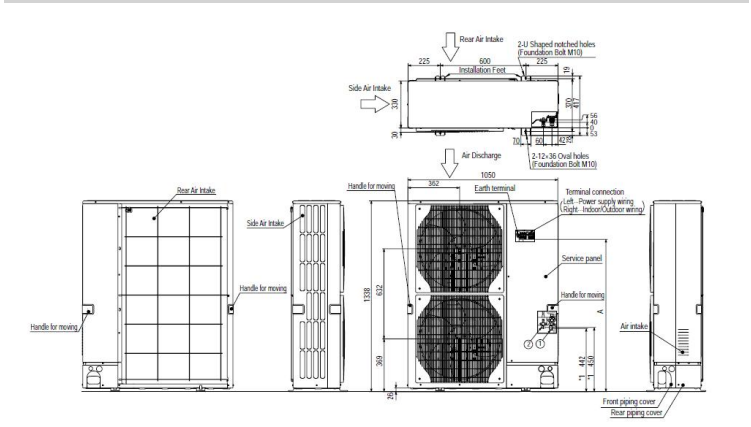

Telephone: 01707 282880 Fax: 01707 278881

Email: airconditioning@meuk.mee.com Website: <http://www.airconditioning.mitsubishielectric.co.uk>

Country of origin: United Kingdom – Japan – Thailand – Malaysia. © Mitsubishi Electric Europe 2013. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.